


 Pinout view

 System view



Q

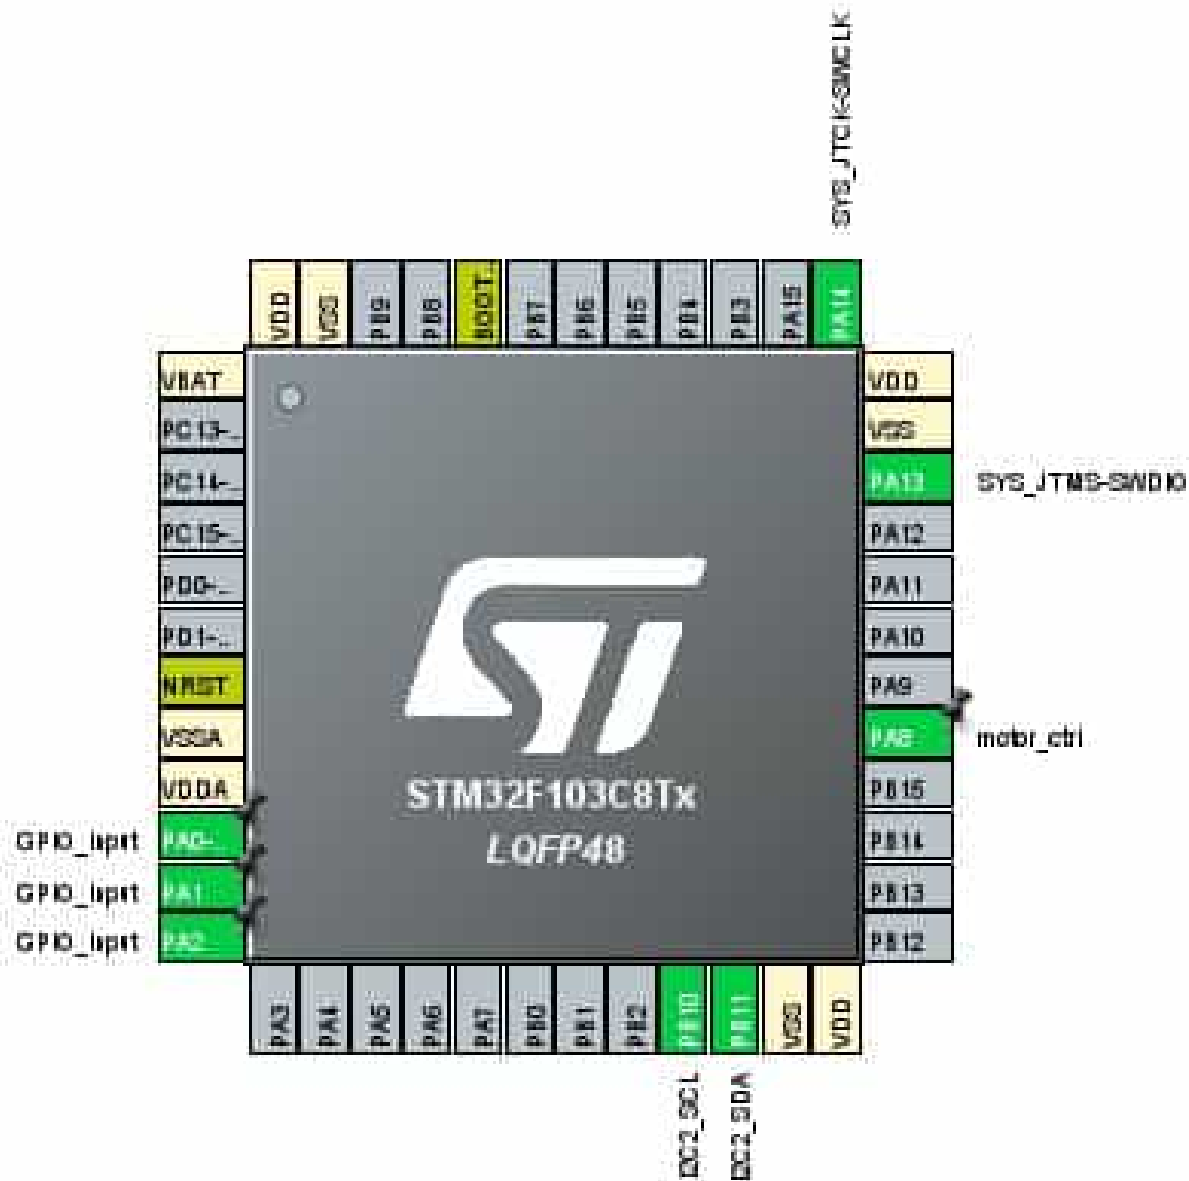

Categories

A-Z

System Core

DMA

GPIO

IWDG

NVIC

▲ RCC

▲ SYS

WWDG

Analog

GPIO Mode and Configuration

Configuration

Group By Peripherals

✓ GPIO

✓ I2C

✓ SYS

Search Signals

☐ Show only Modified Pins

P...	Sign...	GPI...	GPI...	GPI...	Maxi...	User..	Modi...
PA0-...	n/a	n/a	Input...	Pull-up	n/a		✓
PA1	n/a	n/a	Input...	Pull-up	n/a		✓
PA2	n/a	n/a	Input...	Pull-up	n/a		✓
PA8	n/a	Low	Outp...	No p...	Low	moto...	✓

Categories

A->Z

System Core

>

Analog

>

Timers

>

Connectivity

>

CAN

I2C1

I2C2

SPI1

SPI2

USART1

USART2

USART3

USB

Computing

>

Middleware and Software Packs

>

I2C2 Mode and Configuration

Mode

I2C

Configuration

Reset Configuration

DMA Settings

User Constants

GPIO Settings

NVIC Settings

Parameter Settings

Configure the below parameters :

Search (Ctrl+F)

<

Master Features

I2C Speed ModeStandard Mode

I2C Clock Spe...100000

<

Slave Features

Clock No Stretc...Disabled

Primary Addres...7-bit

Dual Address A...Disabled

Primary slave ad...0

General Call add...Disabled

Q []



Categories

A->Z

System Core



Analog



Timers



RTC



TIM1



TIM2



TIM3

TIM4

Connectivity



Computing



Middleware and Software Packs



TIM3 Mode and Configuration

Mode

Slave Mode

Disable



Trigger Source

Disable



☒ Internal Clock

Configuration

Reset Configuration



NMC Settings



DMA Settings



Parameter Settings



User Constants

Configure the below parameters :



Search (Ctrl+F)



Counter Settings

Prescaler (PSC ... 7999

Counter Mode Up

Counter Period (... 499

Internal Clock Di... No Division

auto-reload prelo... Disable

Trigger Output (TRGO) ...

Master/Slave M... Disable (Trigger input effect...

Trigger Event Se... Reset (UG bit from TIMx_E...