

# **Design and Analysis of Battery Management Systems (BMS) in Electric Vehicles**

A PROJECT REPORT

submitted by

**Ayush Kumar (211230013)**

to

The National Institute of Technology Delhi

of

Bachelor of Technology

in

*Electrical and Electronics Engineering*



**Department of Electrical Engineering**

**NIT Delhi**

**Delhi-110036**

June - July 2023

## **DECLARATION**

I hereby declare that the project report entitled ” **Design and Analysis of Battery Management Systems for Electric Vehicles** ” submitted by me to the National Institute of Technology Delhi during the academic year 2023-24 in partial fulfillment of the requirements for the award of Degree of Bachelor of Technology in Electrical and Electronics Engineering is a record of bonafide project work carried out under the guidance and supervision of Dr. Manoj Kumawat . I further declare that the work reported in this project has not been submitted and will not be submitted, either in part or in full, for the award of any other degree or diploma in this institute or any other University.

**Ayush Kumar (211230013)**

Place: NIT Delhi

Date: September 17, 2023

**Department of Electrical Engineering  
National Institute of Technology Delhi  
Delhi – 110036**



**CERTIFICATE**

This is to certify that the report entitled “**Design and Analysis of Battery Management Systems in EVs**” submitted by **Ayush Kumar (Roll no. 211230013)**, to the National Institute of Technology Delhi as a Summer Research Internship in Electrical and Electronics Engineering is a bonafide record of the project work carried out by him under my guidance and supervision. This report in any form has not been submitted to any other University or Institute for any purpose.

Dr. Manoj Kumawat  
Supervisor  
Assistant Professor  
Dept. of Electrical Engineering

# CONTENTS

<b>ACKNOWLEDGEMENT</b>	<b>i</b>
<b>ABSTRACT</b>	<b>ii</b>
<b>LIST OF TABLES</b>	<b>iv</b>
<b>LIST OF FIGURES</b>	<b>iv</b>
<b>Chapter 1 : BATTERY MANAGEMENT SYSTEM</b>	<b>1</b>
1.1 Introduction . . . . .	1
1.1.1 Traction Battery Pack . . . . .	1
1.1.2 Battery Management Systems . . . . .	3
1.2 Cell Monitoring . . . . .	5
1.3 Cell Balancing . . . . .	6
1.3.1 Passive Cell Balancing . . . . .	7
1.3.2 Active Cell Balancing . . . . .	7
<b>Chapter 2 : EXPERIMENTATION</b>	<b>8</b>
2.1 Design and Analysis of a Battery Pack . . . . .	8
2.2 Cell Balancing Model . . . . .	11
2.2.1 Passive cell Balancing . . . . .	11
2.2.2 Active cell Balancing . . . . .	12
2.3 Battery Simulation for Drive Cycle Analysis . . . . .	15
<b>Chapter 3 : CONCLUSIONS</b>	<b>17</b>
<b>Chapter 4 : FUTURE SCOPE OF BMS</b>	<b>19</b>
<b>REFERENCES</b>	

## ACKNOWLEDGEMENT

Many noble hearts contributed immense inspiration and support for the successful completion of the project. I am unable to express our gratitude in words to such individuals.

I would like to express my deep regard to Dr. (Prof.) Ajay K Sharma, Director, NIT Delhi, for providing facilities throughout the works of my project.

I take this opportunity to express my profound gratitude to HOD, Head of the Department, Dr. Ujjwal Kumar Kalla, Professor, Department of Electrical Engineering, NIT Delhi, for providing permission and availing all required facilities for undertaking the project in a systematic way. I am extremely grateful to Supervisor, Dr. Manoj Kumawat Assistant Professor, Department of EE, NIT Delhi, who guided me with his kind, ordinal and valuable suggestions. I would also like to thank all the teaching and non-teaching staff of the Department of EE, NIT Delhi, for the sincere directions imparted and the cooperation in connection with the project.

I will be failing in duty if we do not acknowledge with grateful thanks to the authors of the references and other literatures referred in this project.

Last, but not the least, I take pleasant privilege in expressing my heartfelt thanks to my friends who were of precious help in completing this project.

## **ABSTRACT**

The Battery Management System (BMS) is an advanced electronic system designed to monitor and control rechargeable batteries, ensuring their safe and efficient operation. It serves as a critical component in various applications such as electric vehicles, renewable energy storage systems, and portable electronics. The primary function of the BMS is to oversee the battery pack and individual cells, continuously monitoring their parameters and taking necessary actions to maintain optimal performance and safety.

The BMS consists of a control unit, sensors, and control algorithms. The control unit acts as the brain of the system, processing data from the sensors and executing control algorithms to make informed decisions about the battery's operation. The sensors within the BMS are responsible for measuring key parameters such as current, voltage, and temperature.

One of the key responsibilities of the BMS is cell monitoring. Each cell within the battery pack needs to be monitored to ensure proper charging and discharging. The BMS keeps track of the State of Charge (SOC), which indicates the amount of power remaining in the battery. This information is crucial for estimating the available energy and predicting the battery's remaining runtime. Additionally, the BMS assesses the State of Health (SOH), which provides an indication of the overall health and condition of the battery. Monitoring SOH helps in battery maintenance and lifespan management by identifying any degradation or abnormalities in the battery's performance.

Power management is another vital role of the BMS. It ensures that the SOC and SOH parameters are maintained within specified limits. During the charging process, the BMS regulates the current flow into each cell, preventing overcharging and balancing the charge across all the cells. This balancing mechanism ensures that the cells have uniform charge levels, maximizing their efficiency and extending their lifespan. During discharging, the BMS monitors the voltage levels to prevent them from dropping too low, which could potentially damage the battery. By actively managing the power flow, the BMS helps optimize battery performance and efficiency.

Safety is of utmost importance in battery systems, especially in electric vehicles. The BMS plays a crucial role in ensuring the safety of the battery by continuously monitoring voltage, temperature, and current data. By detecting any anomalies or deviations from the expected ranges, the BMS can take immediate action to prevent hazards. For example, if a leak or thermal runaway is detected, where the battery temperature rises uncontrollably, the BMS can activate safety measures such as disconnecting the battery

or initiating cooling systems to mitigate the situation and prevent further escalation.

The BMS also offers diagnostics capabilities. It can identify faults or abnormalities within the battery system and store them as trouble codes for later analysis and troubleshooting. These trouble codes provide valuable insights into the specific issues affecting the battery, allowing technicians to diagnose and fix the problems efficiently. By providing comprehensive diagnostics, the BMS contributes to the overall maintenance and reliability of the battery system.

In summary, the Battery Management System (BMS) is a sophisticated electronic system that plays a critical role in monitoring and controlling rechargeable batteries. Through cell monitoring, power management, safety features, and diagnostics capabilities, the BMS ensures the safe and efficient operation of batteries in various applications. By continuously monitoring parameters, optimizing power usage, and providing real-time information, the BMS enhances the performance, reliability, and lifespan of battery systems, contributing to the advancement of technologies such as electric vehicles and renewable energy storage.

## **LIST OF TABLES**

1.1	Battery C Rate Chart . . . . .	3
-----	--------------------------------	---

## **LIST OF FIGURES**

1.1	Battery management systems . . . . .	5
2.1	Battery Pack (Stop time 0 sec) . . . . .	9
2.2	Battery Pack (Stop time 1 hr) . . . . .	9
2.3	Output waveform - 1 C Rating battery Pack . . . . .	10
2.4	Passive cell balancing . . . . .	11
2.5	output: passive cell balancing . . . . .	12
2.6	Active cell balancing . . . . .	13
2.7	output: active cell balancing . . . . .	14
2.8	Battery Modeling . . . . .	15
2.9	output: battery modeling . . . . .	16



# **CHAPTER 1**

## **BATTERY MANAGEMENT SYSTEM**

### **1.1 INTRODUCTION**

Electric vehicles (EVs) are essential for replacing internal combustion engine (ICE) vehicles due to their significant environmental benefits. EVs reduce air pollution and combat climate change by producing zero tailpipe emissions. They can be charged using renewable energy sources, promoting a greener energy mix. EVs are more energy-efficient than ICE vehicles, resulting in lower energy consumption and operating costs. Technological advancements in battery technology and charging infrastructure have made EVs more affordable and convenient. Transitioning to EVs enhances energy security by reducing dependence on imported oil. Additionally, EVs contribute to quieter urban environments by eliminating the noise generated by internal combustion engines. While challenges remain, such as expanding charging infrastructure and addressing battery sustainability, the advantages of EVs make them indispensable for achieving a cleaner and more sustainable transportation system.

#### **1.1.1 Traction Battery Pack**

Hybrid and electric vehicles rely on a high voltage battery system, comprising multiple individual modules and cells that are strategically arranged in both series and parallel configurations. The cell, being the smallest unit, typically ranges from one to six volts and serves as a fundamental building block of the battery. These cells are combined into modules, wherein several cells are interconnected either in series to increase voltage or in parallel to boost capacity. Finally, a comprehensive battery pack is created by connecting these modules together, once again in either series or parallel arrangements.

##### **(i) Nominal Voltage**

Nominal voltage in a battery pack refers to the average or typical voltage level at which the battery operates during normal conditions. It is a standardized value that represents the approximate average voltage output of the battery when it is in use. This nominal voltage is often used as a reference point for designing and using electrical systems that rely on the battery pack's power supply.

For example, in a lithium-ion battery pack commonly used in electric vehicles, the nominal voltage of each cell might be around 3.6 to 3.7 volts. If the battery pack consists of multiple cells connected in series, the nominal voltage of the entire battery pack will

be the sum of the nominal voltages of each individual cell.

It's important to note that the actual voltage of a battery pack may vary depending on factors such as charge level, temperature, and load conditions. Therefore, the nominal voltage provides a standard value to work with, but it should not be confused with the actual voltage output that can fluctuate during operation.

#### (ii) Rated Capacity

Rated capacity in a battery pack refers to the amount of electric charge that the battery is designed to store and deliver over a specific period. It is typically measured in ampere-hours (Ah) or milliampere-hours (mAh) and represents the total energy capacity of the battery pack when it is fully charged and discharged according to its intended use.

For instance, if a battery pack has a rated capacity of 100 Ah, it means it can theoretically deliver a current of 1 ampere (A) for 100 hours or 100 amperes for 1 hour, before being fully discharged. In practice, the actual capacity delivered by a battery pack may vary based on factors like discharge rate, temperature, and age of the battery.

Rated capacity is an essential specification for battery packs as it helps users understand how much energy can be stored and utilized before requiring recharging. It is crucial for estimating the range and run-time of devices or vehicles powered by the battery pack and is a fundamental parameter in designing electrical systems that rely on these energy storage units.

$$\text{Total voltage} = (\text{Nominal voltage of each cell}) \times (\text{Number of cells connected in series})$$

#### (iii) C Rate

C-rate, also known as the charge or discharge rate, is a measurement used to describe the rate at which a battery is charged or discharged relative to its rated capacity. It is expressed as a multiple of the battery's nominal capacity.

The C-rate is calculated by dividing the charging or discharging current by the rated capacity of the battery. For example, if a battery has a rated capacity of 1000 mAh (1 Ah), and it is charged or discharged at a current of 500 mA, the C-rate would be 0.5C (500 mA / 1000 mAh).

The C-rate provides a standardized way to understand how fast a battery is being charged or discharged in relation to its capacity. Higher C-rates indicate faster charging or discharging, while lower C-rates represent slower rates. For instance, a 2C charging rate for the same 1000 mAh battery would mean charging it at a current of 2000 mA,

which is twice its rated capacity.

It's important to note that C-rate considerations are vital in battery management and design, as operating a battery at extremely high C-rates can impact its performance, capacity, and overall lifespan. Different types of batteries may have specific maximum recommended C-rates, and manufacturers often provide guidelines to ensure safe and efficient usage.

Table 1.1: Battery C Rate Chart

<b>C Rating</b>	<b>Time</b>
30C	2 minutes
20C	3 minutes
10C	6 minutes
5C	12 minutes
2C	30 minutes
1C	1 hour
0.5C or C/2	2 hours
0.2C or C/5	5 hours
0.1C or C/10	10 hours
0.05C or C/20	20 hours

### 1.1.2 Battery Management Systems

A battery management system (BMS) is a critical component in modern battery-powered systems, responsible for overseeing and optimizing the performance, safety, and lifespan of battery packs. By integrating advanced monitoring, control, and protection functionalities, the BMS ensures the efficient operation of batteries in diverse applications. It constantly monitors key parameters such as cell voltage, temperature, and current to maintain safe operating conditions. Additionally, the BMS estimates the state-of-charge (SoC) and state-of-health (SoH) to provide accurate information about the battery's capacity and overall health. With features like power limitations, charging profile control, cell balancing, and load isolation capabilities, the BMS maximizes battery efficiency, prevents damage, and enhances system reliability. This comprehensive approach to battery management is essential for unlocking the full potential of battery technology and enabling its widespread adoption across industries. [1]

#### (i) Lithium ion Battery

Lithium-ion battery packs have emerged as the dominant energy storage systems across various applications, including aircraft, electric vehicles, portable devices, and other equipment that require a reliable, high-energy-density, and lightweight power source. These batteries offer several advantages, such as a high energy density, longer cycle life, and lower self-discharge rates compared to other battery technologies.

However, ensuring the safe operation, optimal performance, and extended battery life of lithium-ion batteries necessitates the implementation of a battery management system (BMS). The BMS plays a crucial role in monitoring and controlling various parameters of the battery pack to maintain its health and safety.

The primary functions of a BMS include:

1. **Cell Monitoring:** The BMS continuously monitors the voltage, current, and temperature of individual battery cells within the pack. This information allows it to detect and prevent potential issues such as overcharging, over-discharging, and overheating, which can lead to cell damage or even safety hazards.
2. **State of Charge (SoC) Estimation:** The BMS estimates the SoC, which indicates the amount of charge remaining in the battery. Accurate SoC estimation is essential for providing users with reliable information about the available battery capacity and preventing over-discharge, which can damage the battery.
3. **Cell Balancing:** Due to manufacturing variations or differences in cell degradation rates, some cells within a battery pack may have different charge levels. The BMS ensures cell balancing by redistributing charge among cells during charging or discharging, promoting uniform performance and maximizing the overall capacity of the battery pack.
4. **Thermal Management:** The BMS monitors and controls the temperature of the battery pack to prevent excessive heating, which can degrade battery performance and safety. It may activate cooling systems, adjust charging rates, or implement thermal protection measures to maintain optimal temperature conditions.
5. **Fault Diagnosis and Protection:** The BMS detects and responds to abnormal conditions or faults in the battery pack, such as short circuits, overcurrent, or abnormal voltage levels. It initiates protective measures, such as disconnecting the battery or activating safety mechanisms, to prevent further damage or mitigate risks.

By performing these crucial functions, the BMS ensures the safe and efficient operation of lithium-ion battery packs in diverse charge-discharge and environmental conditions. It plays a vital role in extending the lifespan of the batteries, optimizing their performance, and enhancing overall system reliability, making it a critical component in various applications relying on lithium-ion battery technology.

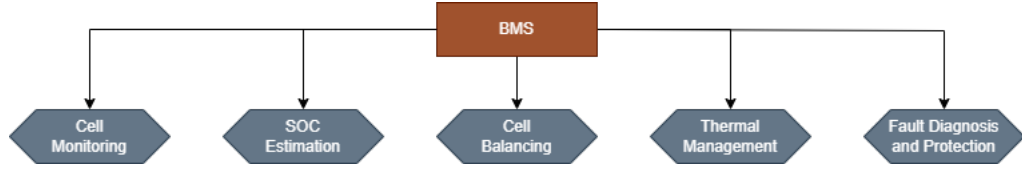


Figure 1.1: Battery management systems

## 1.2 CELL MONITORING

**Abstract:** The battery management system (BMS) is a critical component in electric vehicles (EVs) that ensures the safe and efficient operation of battery packs. Cell monitoring, a crucial aspect of BMS functionality, involves continuous monitoring of individual cell parameters to detect abnormalities and maintain optimal performance. This research paper aims to provide an in-depth exploration of advanced cell monitoring techniques specifically tailored for EV BMS. The paper examines the significance of accurate cell monitoring in enhancing battery pack safety, extending battery life, and optimizing overall system performance. Various cell monitoring methods, such as voltage monitoring, Current Monitoring, temperature monitoring, and impedance spectroscopy, are analyzed, along with emerging technologies like optical sensing and in-situ diagnostics. [4]

Several methods are commonly employed for cell monitoring in electric vehicles (EVs). Here, we elaborate on some of these methods:

**1.2.1. Voltage Monitoring:** Voltage monitoring is a fundamental method used in BMS for cell monitoring. Each cell's voltage is continuously measured to assess its state of charge (SoC) and detect any voltage imbalances or deviations. By comparing individual cell voltages to a reference value or predetermined thresholds, the BMS can identify overcharged, undercharged, or faulty cells.

**1.2.2. Temperature Monitoring:** Temperature monitoring is crucial for assessing cell health and preventing thermal runaway in EV batteries. Temperature sensors are placed in close proximity to each cell to measure their individual temperatures. Monitoring cell temperatures helps prevent overheating, manage cooling systems, and trigger thermal protection measures when cells operate outside safe temperature ranges.

**1.2.3. Current Monitoring:** Current monitoring involves measuring the current flowing in and out of each cell during charge and discharge cycles. By monitoring the current, the BMS can assess cell performance and detect abnormalities such as excessive self-discharge or high internal resistance, which may indicate cell degradation or damage.

1.2.4. Impedance Spectroscopy: Impedance spectroscopy is a technique used to measure the electrochemical impedance of a cell at different frequencies. By analyzing the impedance response, the BMS can extract valuable information about cell aging, state-of-health (SoH), and internal characteristics. This technique can provide insights into cell degradation mechanisms, such as electrolyte resistance and electrode interface behavior.

1.2.5. Optical Sensing: Optical sensing techniques, such as fiber optic sensors or infrared sensors, are emerging methods for cell monitoring. These sensors can measure various parameters like temperature, pressure, and even internal chemical changes within the cell. Optical sensing offers non-invasive and real-time monitoring capabilities, enabling accurate assessment of cell conditions.

1.2.7. In-situ Diagnostics: In-situ diagnostics involve analyzing various cell characteristics and signals to determine cell health and performance. This can include analyzing voltage transient response, frequency analysis of cell voltage or current, or detecting abnormal cell behavior through pattern recognition algorithms. In-situ diagnostics can provide insights into cell degradation, identify early warning signs, and enable proactive maintenance strategies.

It is important to note that these methods are often combined and integrated within the BMS to provide a comprehensive view of cell performance. By continuously monitoring and analyzing multiple parameters, the BMS can ensure optimal cell operation, extend battery life, and enhance the safety and performance of electric vehicle batteries.

### **1.3 CELL BALANCING**

Cell balancing is an essential function in Battery Management Systems (BMS) that ensures all cells within a battery pack are charged and discharged uniformly, maximizing the overall performance and lifespan of the battery. The inherent low voltage of individual battery cells necessitates the construction of battery packs through series connections of multiple cells to achieve the required high voltage output. However, the existing battery manufacturing technology cannot guarantee perfectly identical cells, leading to imbalances among the cells. Additionally, as the cells undergo charging and discharging cycles, their voltages may further diverge. These imbalances significantly degrade the performance and reliability of the battery pack, resulting in reduced usable capacity due to the presence of low-voltage cells. Consequently, the implementation of battery equalizers becomes essential to ensure that all cells within a series-connected battery string are thoroughly charged and balanced.[3] There are several methods of cell balancing, but two common types are:

### **1.3.1 Passive Cell Balancing**

Passive cell balancing is a simple and cost-effective technique used in many BMS implementations. In this method, passive resistors are connected in parallel with each cell in the battery pack. These resistors provide an alternate discharge path for cells that are at a higher state of charge (SOC) compared to others.

When the battery pack is charging or discharging, cells with higher SOC will reach their maximum voltage earlier than others. The parallel resistors create a bypass route for the excess current, effectively draining some charge from the cells with higher SOC. As a result, the voltage across all cells is balanced over time.

Passive cell balancing is relatively straightforward to implement, but it has some limitations. It is not suitable for high current applications since the balancing resistors can dissipate significant power, leading to energy wastage and potential heat generation. [5]

### **1.3.2 Active Cell Balancing**

Active cell balancing is a more sophisticated and efficient technique used in advanced BMS systems. Instead of relying on resistors, active cell balancing uses electronic circuits to redistribute energy among the cells actively.

Each cell in the battery pack is connected to an individual control circuit that monitors its voltage and SOC. When some cells start to deviate from the average voltage, the active balancing circuitry comes into action. It transfers charge from higher SOC cells to lower SOC cells, effectively equalizing the cell voltages. [2]

Active cell balancing can be further classified into various methods, such as voltage-based, current-based, or hybrid approaches. Voltage-based balancing involves directly transferring charge between cells, while current-based methods control the charging and discharging rates of individual cells to balance them.

Active cell balancing is more efficient than passive as it does not dissipate energy as heat. However, it requires more complex electronics and control algorithms, making it a bit costlier to implement compared to passive balancing.

The choice between passive and active cell balancing depends on the specific requirements of the battery pack, including the application, cost constraints, and desired performance. Passive balancing is often suitable for applications with low to moderate currents and cost-sensitive scenarios.

## **CHAPTER 2**

### **EXPERIMENTATION**

#### **2.1 DESIGN AND ANALYSIS OF A BATTERY PACK**

This report presents the design and analysis of a battery pack with a load-dependent C Rating. The battery pack consists of 24 cells arranged in series and parallel configurations, resulting in a 50V, 25Ah rated capacity. The C Rating of the battery pack is influenced by the applied load, specifically a resistive load in a series RLC branch. The findings show that a specific resistive load value leads to the complete discharge of the battery pack within one hour. By utilizing this reference, users can determine the required resistive load to achieve desired discharge time. The battery pack model was developed using Simulink, a powerful simulation tool in MATLAB, to mimic real-world conditions. The series RLC branch with only resistance served as the load, and the battery pack was subjected to various resistive load values. Here, we are considering Lithium-ion cells whose nominal voltage is 3.7 V. As the total number of cells that are connected in series is 12, the total voltage (V) is therefore equal to:

$$V = 3.7 \times 12 = 44.4 \text{ V}$$

$$\text{Rated Capacity} = 25 \text{ A}$$

$$\text{Therefore, Resistive load value} = 44.4/25 = 1.776 \text{ ohm}$$

It is observed that at this resistive load value, battery is getting discharged from 100 SOC to 0 SOC in one hour. So, it is having C-rate of 1C. (Refer the Table 1.1)

On doubling the resistive load value, i.e  $1.776 \times 2 = 3.55$ , the discharge time is also doubled to 2 hours (7200 seconds). In this case, C rate = 0.5 C

We can conclude that C-Rating totally depends on Load. The simulation result are presented to verify the feasibility of the circuit.



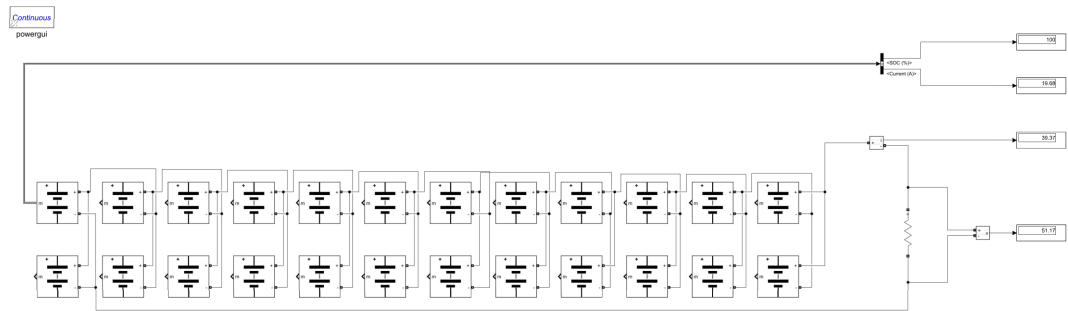


Figure 2.1: Battery Pack (Stop time 0 sec)

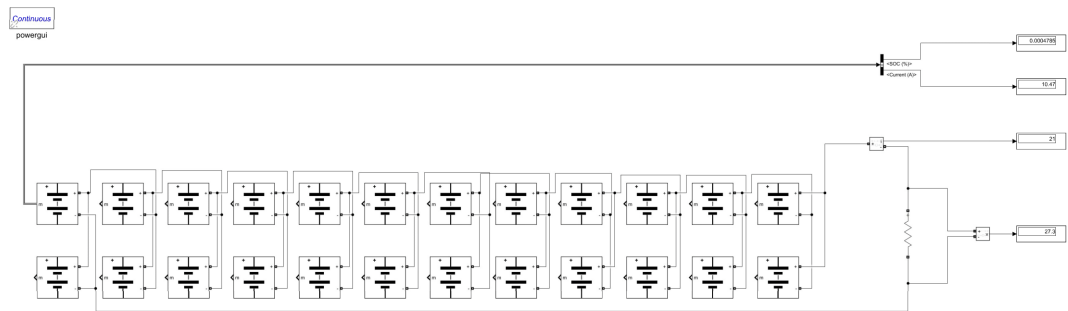


Figure 2.2: Battery Pack (Stop time 1 hr)

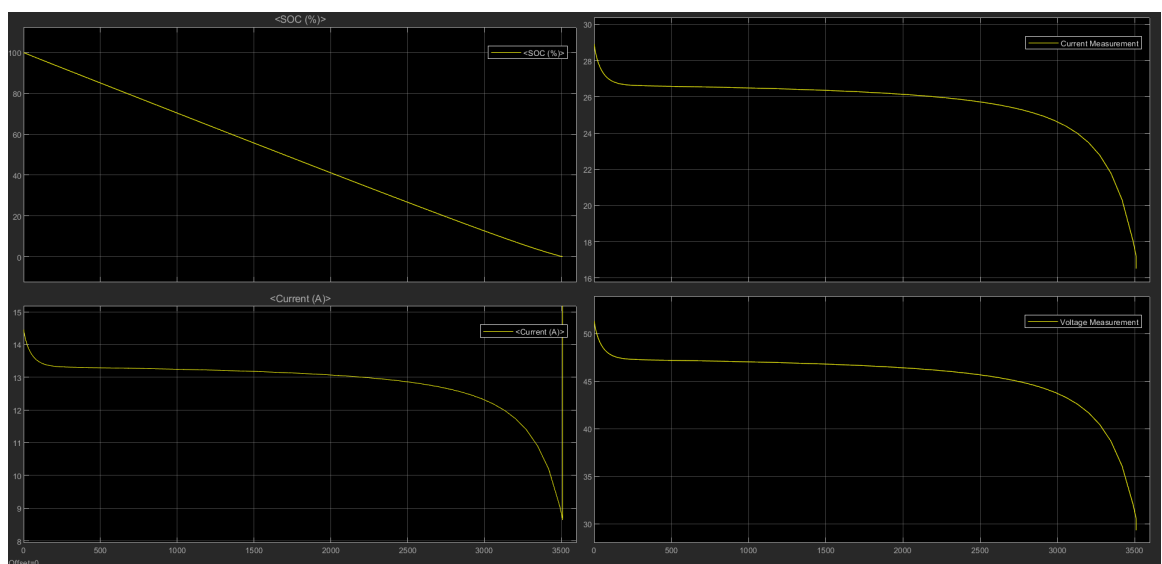


Figure 2.3: Output waveform - 1 C Rating battery Pack

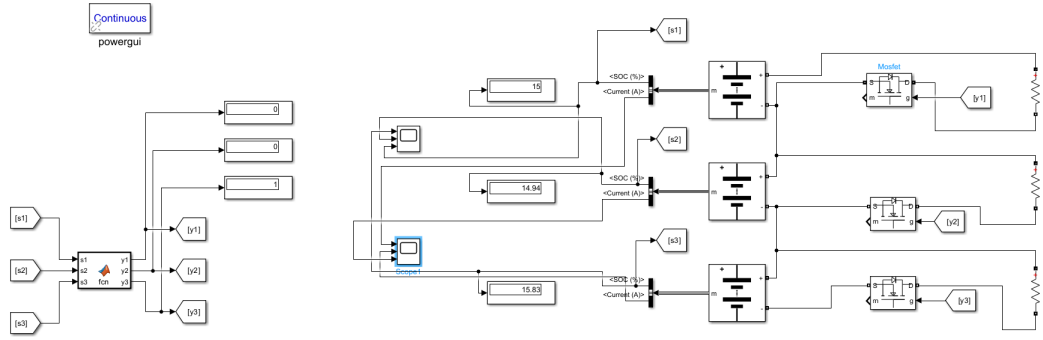


Figure 2.4: Passive cell balancing

## 2.2 CELL BALANCING MODEL

### 2.2.1 Passive cell Balancing

In series-connected battery packs, differences in the internal characteristics of individual cells can lead to unbalanced states of charge. Unbalanced SOC can result in reduced overall pack performance, capacity degradation, and even cell damage. Passive cell balancing is a widely used technique to address this issue.

Here, we present a simulation study conducted in MATLAB Simulink to investigate the passive cell balancing technique in a series battery pack. The battery pack consists of three batteries connected in series, and each cell is connected with a resistive load of a specific value. MOSFETs are connected to each load to act as switches for passive cell balancing. A bus selector is connected with a display and scope to capture the state of charge (SOC) and current waveforms. MATLAB functions are defined to implement passive cell balancing based on the SOC values obtained from the bus selector. The simulation results demonstrate the effectiveness of passive cell balancing in equalizing the SOC of each battery cell and provide insights into the balancing process.

We utilized MATLAB Simulink to simulate the passive cell balancing process in a series battery pack. The simulation includes three battery cells connected in series, resistive loads, MOSFET switches, a bus selector for SOC measurement, and MATLAB functions to implement passive cell balancing based on SOC values.

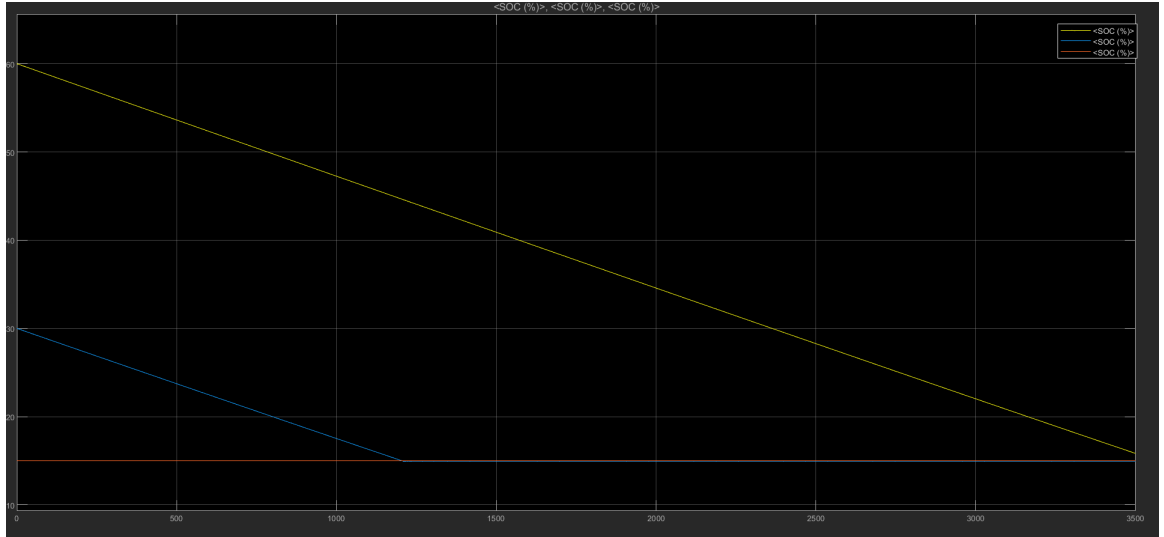


Figure 2.5: output: passive cell balancing

Here, It can be observed that after a certain time, the SOC of all three cells becomes equal.

In MATLAB Function, codes are designed in such a way that, let's say, each cell has a certain level of charging. The code starts by figuring out which battery has the least charge among the three. Then based on which battery has the least charge, the code makes some decisions. If battery 1 has the least charge, and the value is equal to that of battery 2, then the output associated with battery 3 would be 1, which means the MOSFET across the resistive load of battery 3 needs to be open. In this case, the output associated with battery 1 and 2 would be 0, which means the MOSFET across the resistive load of battery 1 and 2 need to be close. If battery 1 has the least charge and that is equal to that of battery 3, the output of battery 2 would be 1. If battery 1 has the least charge but is not equal to that of batteries 2 and 3, the output of battery 2 and battery 3 would be 1.

Similarly, The logic for battery 2 and battery 3 will be taken into consideration. If all the batteries have the same charge values, the output associated with every battery will be 0 (MOSFET would be closed).

### 2.2.2 Active cell Balancing

Here, we present a simulation study conducted in MATLAB Simulink to investigate the active cell balancing technique in a series battery pack. The battery pack consists of two batteries connected in series.

Here, The PWM Generator block implements a PWM generator. The pulse width modulation technique controls power transfer from one electrical component to another by

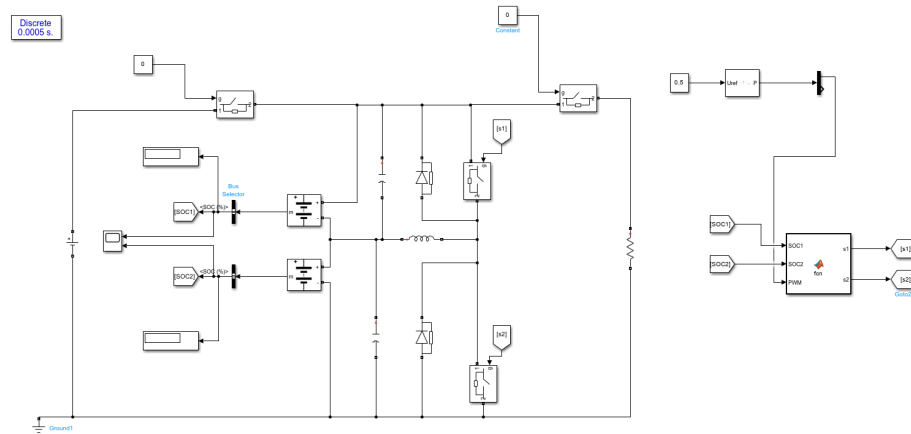


Figure 2.6: Active cell balancing

quickly switching between full power transfer and no power transfer.

The provided MATLAB function ‘fcn’ implements a simple algorithm for active cell balancing between two battery cells. The purpose of this algorithm is to balance the State of Charge (SoC) of two cells by adjusting the PWM (Pulse Width Modulation) signals applied to each cell’s balancing circuit.

Here’s a breakdown of the algorithm:

1. The function ‘fcn’ takes three input arguments: ‘SOC1’, ‘SOC2’, and ‘PWM’.
2. It starts by comparing the SoC of the two cells, represented by ‘SOC1’ and ‘SOC2’.
3. If ‘SOC2’ is less than ‘SOC1’, it means that the second cell has a lower SoC and requires charging. In this case, the algorithm sets the PWM signal for the first cell (‘s1’) to ‘PWM’ (full duty cycle, indicating maximum balancing current) and sets the PWM signal for the second cell (‘s2’) to 0 (no balancing current).
4. If ‘SOC1’ is less than ‘SOC2’, it means that the first cell has a lower SoC and requires charging. In this case, the algorithm sets the PWM signal for the first cell (‘s1’) to 0 (no balancing current) and sets the PWM signal for the second cell (‘s2’) to ‘PWM’ (full duty cycle, indicating maximum balancing current).
5. If neither of the above conditions is met, it implies that both cells have the same SoC. Therefore, the algorithm sets both PWM signals (‘s1’ and ‘s2’) to 0, indicating that no active balancing is needed.

In essence, this algorithm determines which of the two cells has a lower SoC and then activates the balancing circuit for that cell using the PWM signal while keeping

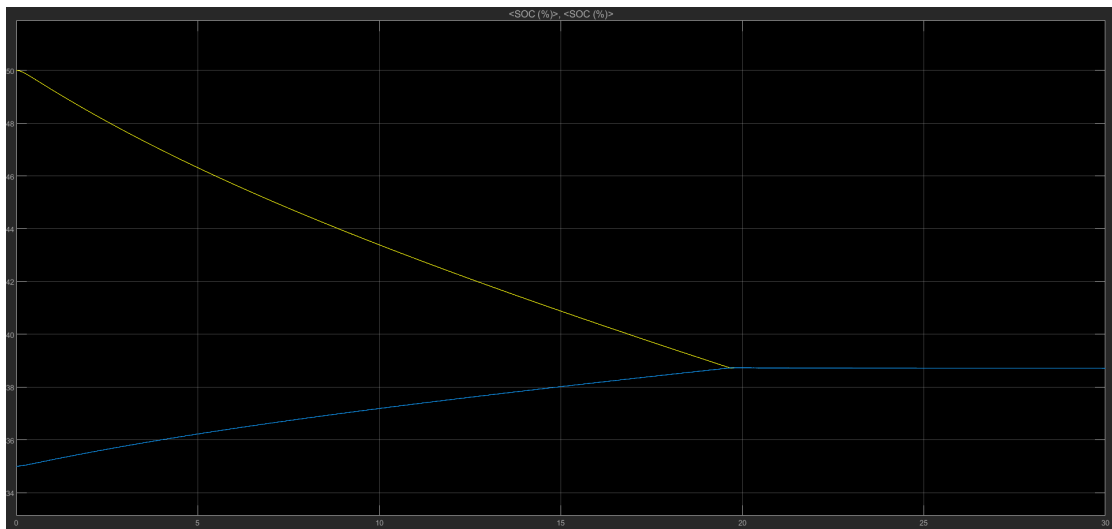


Figure 2.7: output: active cell balancing

the other cell's balancing circuit inactive. The use of PWM allows for controlling the amount of energy transferred between the cells during the balancing process.

It's important to note that this algorithm is a basic example and doesn't account for factors such as the rate of balancing, the battery chemistry, or safety considerations. More sophisticated balancing algorithms may consider these factors for effective and safe cell balancing.



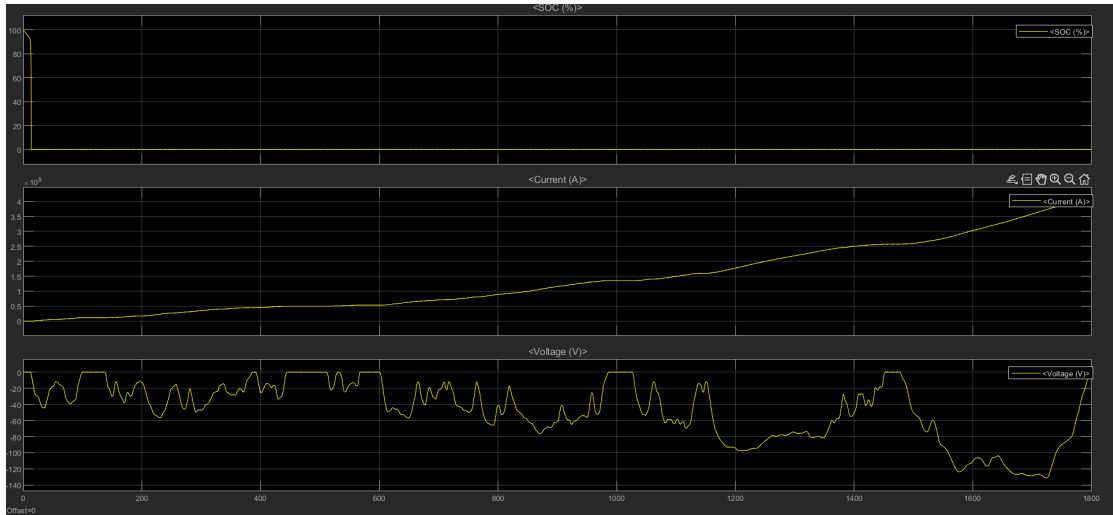


Figure 2.9: output: battery modeling

It is observed that on increasing the speed, the current gradually increases. And the SOC decreases as the battery gets discharged with the passage of time. The output waveform of voltage is non-uniformly oscillatory in nature. (refer to Figure 2.8). This study plays a pivotal role in optimizing powertrains, estimating the range for EVs, and facilitating informed decision-making for manufacturers, researchers, and consumers.



## **CHAPTER 3**

### **CONCLUSIONS**

In summary, the battery management system (BMS) plays a crucial and multifaceted role in the context of electric vehicles (EVs). As the heart of the EV's power storage system, the BMS is responsible for overseeing, controlling, and optimizing the performance of the battery pack to ensure its efficient operation.

First and foremost, the BMS acts as a vigilant guardian, continuously monitoring key parameters such as cell voltage, temperature, and state of charge (SoC). By closely tracking these variables, the BMS can detect any anomalies or potential issues that may arise during the charging or discharging process. This vigilant monitoring allows the BMS to maintain safe operating conditions for the battery pack and prevent potential hazards.

Furthermore, the BMS employs advanced algorithms and controls to actively manage and balance the cells within the battery pack. Since individual cells within a pack may have slight variations in performance and charge levels, the BMS ensures equalization through cell balancing techniques. This balancing process redistributes charge among cells during charging or discharging, ensuring that all cells operate within their optimal range and maximizing the overall capacity of the battery pack.

The BMS also plays a pivotal role in protecting the battery pack from detrimental conditions. By implementing various safeguards, such as power limitations and control over the charging profile, the BMS prevents issues like thermal runaway, overcharging, and over-discharging. These protective measures are crucial for preserving the battery's health, extending its lifespan, and maintaining its optimal performance over time.

Additionally, the BMS provides valuable information to EV owners and operators about the state-of-charge (SoC) and state-of-health (SoH) of the battery. Accurate SoC estimation allows users to gauge the available driving range and plan their trips accordingly, while SoH estimation provides insights into the overall health and degradation of the battery. This information empowers users to make informed decisions about charging patterns, driving habits, and maintenance schedules, ultimately maximizing the battery's efficiency and longevity.

Overall, the BMS serves as the brain and guardian of the EV's battery pack, ensuring its safe and efficient operation. Through constant monitoring, active cell balancing, protective controls, and the provision of valuable information, the BMS optimizes

the performance, extends the lifespan, and enhances the safety of the battery pack in electric vehicles. It is an indispensable component in the successful integration and widespread adoption of EVs, contributing to a cleaner, more sustainable transportation future. Moreover, the BMS's role extends beyond just the immediate operation of the battery pack. It also contributes to the overall system-level efficiency of the electric vehicle. By monitoring and optimizing the battery's performance, the BMS helps maximize energy utilization, ensuring that every unit of stored energy is effectively converted into propulsion. This translates into increased range for the vehicle and enhanced overall energy efficiency.

The BMS's ability to accurately estimate the state-of-charge and state-of-health of the battery pack provides valuable insights for EV manufacturers and operators. This data aids in evaluating the battery's performance over time, identifying patterns of degradation or wear, and optimizing future battery designs. It enables proactive maintenance and replacement strategies, ensuring that the battery pack remains in optimal condition and minimizing the risk of unexpected failures.

In addition to its technical functionalities, the BMS also contributes to the overall safety of electric vehicles. By continuously monitoring the battery pack and implementing protective measures, such as thermal management and load isolation capabilities, the BMS mitigates potential risks and safeguards against hazardous situations. This is particularly critical in high-stress scenarios, such as extreme temperatures, high discharge rates, or in the event of a fault.

As the field of electric vehicles continues to advance, the role of the BMS becomes increasingly significant. The ongoing research and development efforts in BMS technology aim to enhance its capabilities further. Engineers are working on integrating artificial intelligence and machine learning algorithms into BMS systems, enabling more precise estimations, adaptive controls, and intelligent decision-making. These advancements will result in even more efficient and reliable battery management, further optimizing the performance and lifespan of electric vehicle battery packs.

In conclusion, the battery management system (BMS) is a fundamental component in the successful implementation of electric vehicles. Through its monitoring, control, and protective capabilities, the BMS ensures the efficient operation, safety, and longevity of the battery pack. It maximizes energy utilization, provides valuable data for future improvements, and contributes to the overall system-level efficiency of electric vehicles. As technology continues to evolve, the BMS will play an increasingly important role in shaping the future of electric transportation, driving advancements in battery management and enhancing the overall user experience.

## **CHAPTER 4**

### **FUTURE SCOPE OF BMS**

Battery Management Systems (BMS) are integral to the functioning of electric vehicles (EVs), ensuring optimal battery performance, safety, and longevity. This report delves into the evolving landscape of BMS and its potential future developments, encompassing advancements in battery technologies, energy efficiency, fast charging, predictive maintenance, AI integration, Vehicle-to-Grid (V2G) applications, cybersecurity, autonomous driving, sustainability, and standardization.

#### **1. Evolving Battery Technologies:**

As the EV industry progresses, there is a growing focus on advancing battery technologies beyond the established lithium-ion chemistry. Innovations such as solid-state batteries and lithium-sulfur batteries promise higher energy densities, faster charging, and improved safety. Future BMS solutions must be tailored to cater to the unique characteristics of these advanced chemistries, optimizing their performance and ensuring safe operation.

#### **2. Enhanced Energy Efficiency and Range:**

BMS will continue to evolve to address the challenge of maximizing energy efficiency and extending driving range. Advanced algorithms will accurately estimate remaining battery capacity, taking into account factors like driving patterns, weather conditions, and energy consumption. This estimation will empower drivers with more precise range predictions, alleviating range anxiety and enhancing the overall user experience.

Moreover, BMS will play a pivotal role in optimizing energy distribution among individual battery cells. By ensuring that each cell is operating within its optimal range, BMS will enhance overall pack efficiency, minimize energy losses, and extend the overall lifespan of the battery pack.

#### **3. Fast Charging and High-Power Applications:**

The proliferation of fast-charging infrastructure necessitates BMS solutions that can handle higher charging currents and power levels. However, fast charging generates heat, which can negatively impact battery health. Future BMS systems will incorporate advanced thermal management strategies to monitor and control temperature during fast

charging, preventing thermal runaway and ensuring battery safety and longevity.

#### 4. Predictive Maintenance and Health Monitoring:

Predictive maintenance is a critical aspect of BMS evolution. BMS will continuously monitor battery health, collecting data on various parameters such as temperature, voltage, and charge/discharge cycles. By analyzing this data using machine learning algorithms, BMS can predict potential battery failures or degradation before they occur. This proactive approach allows for timely maintenance and reduces unplanned downtime, thereby optimizing vehicle operation and reducing maintenance costs.

#### 5. Integration of AI and Machine Learning:

The integration of AI and machine learning will empower BMS to optimize battery performance based on real-time data and evolving conditions. These systems will adapt to factors such as driving patterns, traffic conditions, and environmental variables. Through continuous learning, BMS will fine-tune energy management strategies, leading to improved energy efficiency and a more personalized driving experience.

#### 6. Vehicle-to-Grid Integration:

BMS will be pivotal in enabling V2G applications, where EVs can supply power back to the grid during peak demand periods. This requires sophisticated control algorithms to manage bidirectional energy flows while safeguarding battery health. BMS will ensure that energy export to the grid is balanced with the need to maintain a sufficient charge for the vehicle's intended usage, ultimately contributing to grid stability and reliability.

#### 7. Cybersecurity and Over-the-Air Updates:

With the increasing connectivity of EVs, BMS must prioritize cybersecurity to protect against potential cyber threats. Secure communication protocols, encryption, and intrusion detection systems will be integrated into BMS to safeguard critical vehicle systems and data. Additionally, over-the-air updates will allow manufacturers to enhance BMS algorithms remotely, ensuring optimal performance and adapting to emerging cybersecurity challenges.

#### 8. Integration with Autonomous Driving:

The integration of BMS with autonomous driving systems will facilitate energy optimization based on route information and traffic conditions. BMS will collaborate with autonomous driving algorithms to adjust energy consumption strategies, ensuring that

the vehicle's energy reserves are managed efficiently without compromising driving performance or safety.

#### 9. Sustainability and Recycling:

BMS will contribute to sustainability efforts by providing valuable data on battery health and usage patterns. This information will streamline recycling processes by enabling targeted disassembly and recycling of individual battery components. Additionally, BMS can facilitate second-life applications for used batteries, such as energy storage systems, further extending their utility and reducing environmental impact.

#### 10. Standardization and Regulation:

As the EV industry matures, standardized BMS requirements and regulations will emerge to ensure safety, interoperability, and consumer protection. Industry stakeholders and regulatory bodies will collaborate to establish guidelines for BMS design, performance, and testing, fostering a cohesive and secure EV ecosystem.

The future of Battery Management Systems in electric vehicles is characterized by dynamic advancements that align with the broader trends in EV technology. Evolving battery chemistries, energy efficiency optimization, fast charging solutions, predictive maintenance, AI integration, V2G capabilities, cybersecurity measures, autonomous driving integration, sustainability initiatives, and standardization efforts collectively shape a promising landscape for BMS. As the EV industry continues to grow, BMS will remain at the forefront of innovation, playing a pivotal role in enhancing EV performance, safety, and sustainability on a global scale.

Among all, The future scope of the Integration of AI and Machine Learning is quite interesting and depicts one of the most impactful changes. Let's discuss it in detail.

The integration of artificial intelligence (AI) and machine learning (ML) into Battery Management Systems (BMS) represents a significant advancement in optimizing the performance, efficiency, and longevity of electric vehicle (EV) batteries. AI and ML bring a new level of adaptability and intelligence to BMS, enabling real-time decision-making and personalized energy management strategies.

#### Benefits of AI and ML Integration in BMS:

1. **Dynamic Energy Management:** Traditional BMS systems often employ predefined algorithms for energy management. AI and ML empower BMS to dynamically adjust

energy distribution and usage patterns based on real-time data. These systems can consider factors such as driving habits, traffic conditions, weather, and route information to optimize energy consumption and improve overall efficiency.

2. adaptive Charging: AI-powered BMS can optimize charging strategies by learning from previous charging sessions. By analyzing charge history, battery health, and environmental conditions, the system can determine the most suitable charging rate and duration, extending battery life and reducing charging-related degradation.

3. State-of-Charge Estimation: Accurate estimation of State of Charge (SoC) is crucial for both driver convenience and battery health. AI algorithms can enhance SoC estimation by continuously learning from the battery's behavior and adjusting predictions based on usage patterns, thereby reducing range anxiety and improving driving confidence.

4. Temperature Management: AI-equipped BMS can actively monitor and manage battery temperature. By analyzing historical and real-time temperature data, the system can dynamically adjust cooling or heating mechanisms to maintain the battery within optimal operating conditions. This enhances battery life and performance, especially during fast-charging sessions.

5. Predictive Maintenance: Machine learning algorithms can predict potential battery issues based on patterns in data. By continuously monitoring various parameters such as voltage, current, and temperature, AI-powered BMS can identify deviations from normal behavior and provide early warnings for maintenance, minimizing downtime and repair costs.

#### Implementation Challenges and Considerations:

1. Data Quality and Quantity: Effective AI and ML algorithms require large volumes of high-quality data. BMS should be designed to collect, process, and transmit relevant battery data to facilitate accurate learning and decision-making.

2. Real-Time Processing: AI-powered BMS must process data in real time to provide timely responses. This requires efficient hardware and software architectures capable of handling the computational demands of AI algorithms.

3. Model Interpretability: As AI and ML models become more complex, ensuring their interpretability becomes crucial. BMS designers need to strike a balance between sophisticated algorithms and the ability to explain the decisions made by the system.

4. Safety and Redundancy: AI-driven decisions should prioritize safety and incorpo-

rate redundancy mechanisms. BMS should be designed to revert to predefined safety protocols in case of unexpected AI failures or anomalies.

#### Future Developments:

The integration of AI and ML in BMS is an evolving field with vast potential for growth:

1. **Continuous Learning:** AI-powered BMS can continually learn and adapt to changing conditions, further optimizing battery performance over the vehicle's lifecycle.
2. **Collaborative Intelligence:** BMS can communicate and collaborate with other vehicle systems, such as autonomous driving algorithms, to achieve holistic energy management and enhance overall vehicle performance.
3. **User-Centric Customization:** AI can enable user preferences to be incorporated into energy management strategies, allowing drivers to customize their driving experience while maintaining efficient battery usage.
4. **Data Sharing and Network Effects:** As more EVs with AI-equipped BMS come online, aggregated data can be used to improve AI models, benefiting the entire EV ecosystem.

#### Conclusion:

The integration of AI and machine learning in Battery Management Systems marks a transformative shift in EV battery management. These technologies enable dynamic, adaptive, and personalized energy management, leading to enhanced efficiency, extended battery life, and improved overall EV performance. While challenges exist, ongoing advancements in AI and ML will pave the way for safer, smarter, and more efficient electric vehicles, driving us toward a sustainable and connected transportation future.

## REFERENCES

- [1] Spoorthi B and P. Pradeepa. Review on battery management system in ev. In *2022 International Conference on Intelligent Controller and Computing for Smart Power (ICICCSP)*, pages 1–4, 2022.
- [2] Seonwoo Jeon, Jae-Jung Yun, and Sungwoo Bae. Active cell balancing circuit for series-connected battery cells. In *2015 9th International Conference on Power Electronics and ECCE Asia (ICPE-ECCE Asia)*, pages 1182–1187, 2015.
- [3] Manikant Kumar, Vinod Kumar Yadav, Kirti Mathuriya, and Arun Kumar Verma. A brief review on cell balancing for li-ion battery pack (bms). In *2022 IEEE 10th Power India International Conference (PIICON)*, pages 1–6, 2022.
- [4] P Santhosh, D Arjunn, A Daniel Dhas, M Dinesh Kumar, S Jeshwanth, and N Logesh. Remote monitoring and analysis of ev batteries using bms. In *2022 3rd International Conference on Smart Electronics and Communication (ICOSEC)*, pages 385–389, 2022.
- [5] Abhay P. Shukla and Rakesh. A. Patel. Battery management system by passive cell balancing for electric vehicle. In *2022 2nd International Conference on Power Electronics IoT Applications in Renewable Energy and its Control (PARC)*, pages 1–6, 2022.