


Why we need to understand device in Embedded Linux?

Driver ← device
Initialize exist



Linux

Userspace → doesn't has access HW

Kernel → access HW



eg: UART-CR → configure UART

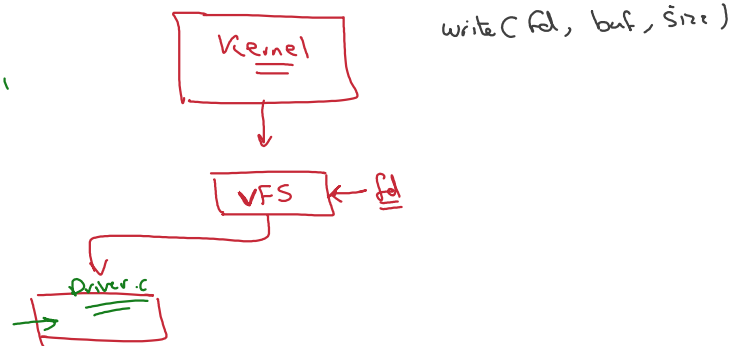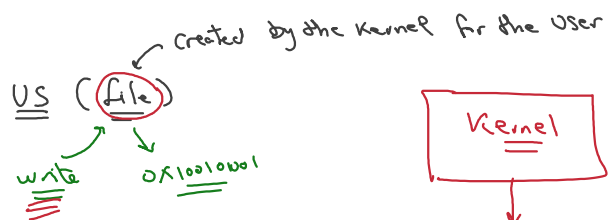

Linux

Driver ← Device
UART UART



```

fady@android:/sys/class/leds/input3:capslock$ ls
brightness device max_brightness power subsystem

```

Linux
led.c
 void gpio_writch (①)
 {
 }
 }

- ① In order the Driver to init, we need the device .
- ② any functionality in driver will be accessed by a file

UART-SendBuffer



SendBuffer (hello)

Echo hello > SendBuffer

VS → file

VSS

driver

main
 {
 , port-init;
 }



← open

fd

→ dprint (fd hello);

Driver-VSS

