PEPSICO
PACKAGING SPECIFICATION

Highly Confidential and Proprietary Information - Do Not Duplicate

Spec Number:		Status:
P0035094	Preform, PET, Monolayer, PCO - 1881, 42.000g, Lipton, Resilux	Approved

Created by:	Approved Date:	Last Updated:	Rev#:
Y. Ginde	08-Nov-2024	08-Nov-2024	1

Business:	Region(s):	Market(s):	Brand(s):
Beverage	EU	Russia	Lipton

Requirements

Supporting Documents

Property	Value
IMPORTANT NOTE	Qualified production of PepsiCo packaging must comply with the following supporting documents. For a current version of any of the documents contact PepsiCoGlobalPkgDocumentation@pepsico.com

2000.135 Global Packaging Test Methods - Plastic Bottles, Containers and Preforms
http://pepsicodocumentmanagement.pepsico.com/fssdm/drl/objectId/090130da806cf61a

2000.145 Global Packaging Performance Standards - Preforms
http://pepsicodocumentmanagement.pepsico.com/fssdm/drl/objectId/090130da806cc3d8

General Description

Property	Value
Market	Russia

Sustainability Data

Property	Value
Bio-based PET, %	0
Max. Recycled Content, %	30
Weight, g	42.00
Countries RRC Compliant	Russia

Materials

Property	Value
Note	IV data and % rPET (PCR) must be included in COC/COA

-Mono-

Property	Value
Material	PET
PCR Supplier and Max %	Plarus, ClearPET rPET Clear, max 10% for Lipton HF (clear bottles) Senege, Rospet FTR HF-30 (30% rPET) for Lipton HF (clear bottles) - the qualification is ongoing
Note	Number of inclusions (black spots) allowed for 100 preforms: 10% rPET (Plarus) from 0.5 mm to <1 mm - 6 pcs from 1mm to < 2mm - 2 pcs 30% rPET (Senege, FTR HF-30) < 0.5 mm - not rated from 0.5 mm to <1 mm - 25 pcs from 1mm to < 2mm - 8 pcs no inclusions bigger in size allowed

Approved Resins

1

Property	Target	Min	Max	Test Method
Material Manufacturer and Part #	Senege - Rospet HF			
Intrinsic Viscosity (IV) (ASTM D4603 Solution Method/Davenport Method)	0.840	0.820	0.860	

2

Property	Target	Min	Max	Test Method
Material Manufacturer and Part #	Plarus - ClearPET			

Intrinsic Viscosity (IV) (ASTM D4603 Solution Method/Davenport Method)	0.820	0.800	0.840	
Intrinsic Viscosity (IV) (Dynisco (Melt Flow Index) Method)	0.780	0.760	0.800	

3

Property	Target	Min	Max	Test Method
Material Manufacturer and Part #	Senege - Rospet FTR HF-30			
Intrinsic Viscosity (IV) (ASTM D4603 Solution Method/Davenport Method)	0.850	0.840	0.860	
Intrinsic Viscosity (IV) (Dynisco (Melt Flow Index) Method)	0.810	0.800	0.820	

-Multi-

1

Property	Value
Note	Layers are specified from inside to outside, starting with 1.

Dimensional Analysis

General

Property	Target	Min	Max	Test Method
Length, in.	5.1970	5.1710	5.2230	TMBOT 1.2
Length, mm	132.0000	131.3400	132.6600	TMBOT 1.2
Diameter - Neck Straight, in	1.0040	1.0000	1.0080	TMBOT 1.2
Diameter - Neck Straight, mm	25.5000	25.4000	25.6000	TMBOT 1.2

Finish Dimensions

Property	Value
Finish Type	PCO - 1881

Physical Properties

Property	Target	Min	Max	Test Method
Weight, g	42.000	41.600	42.400	TMBOT 1.6
Note	Color values must be included in COC/COA			

Color (No Functional Barrier/Additive)

2

Property	Value
Color	Clear

Performance Requirements

Property	Value
Note	Refer to Global Packaging Performance Standards document.

Special Requirements

Property	Value
Note	Condition preforms to room temperature for 24 hours prior to running.

Storage Requirements

Property	Value
Note	It is highly recommended that Preforms be held a maximum of 60 days before use. Preforms aged over 6 months must be evaluated for fitness of use by PepsiCo.

Qualified Vendor / Manufacturing (Filling) Locations

OOO Resilux Volga - Kostroma, Russia (VNDR010772)

Russia - Domodedovo - PBC

Incoming Pallet Configurations

1

Property	Value
Stack Height, max	4
Unit Load Weight, kg	398.60
Unit Load Weight, lb	878.76
Pallet Material	none
Unit Load (LxWxD), in	48 x 40 x 47
Unit Load (LxWxD), mm	1210 x 1020 x 1185
Items/Gaylord	7,800
Weight - Gaylord, lbs	15,653

Weight - Gaylord, kg	71.0
Gaylord Material	Metal
Unitizing	None


Drawings

Drawing Type	Drawing Description
Packaging Drawings	Resilux -6733-Preform-20100910-42g
Packaging Drawings	Finish-PCO - 1881-ISBT-3784253-17-20070214.


Revision Notes

11/8/2024 20241010 E.Sokolovskaya - Sustainability Data, Materials, Physical Properties updated as per request from Svetlana Goncharova.

Resilux -6733-Preform-20100910-42g

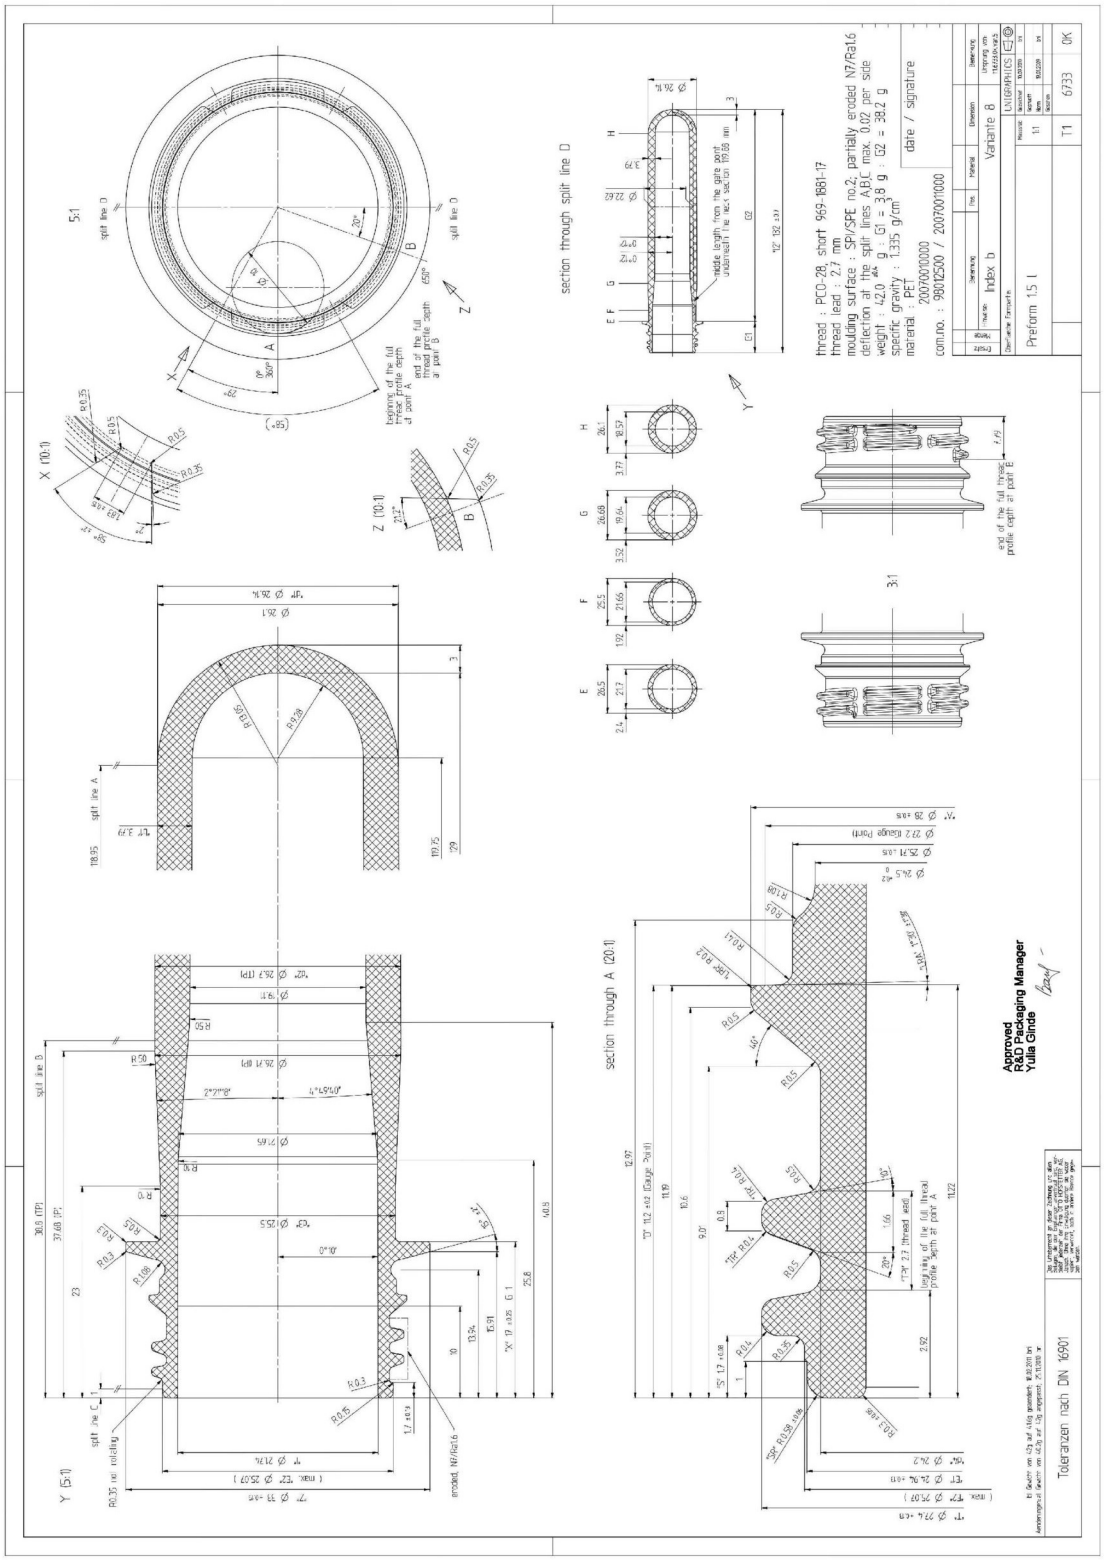

Finish-PCO - 1881-ISBT-3784253-17-20070214.

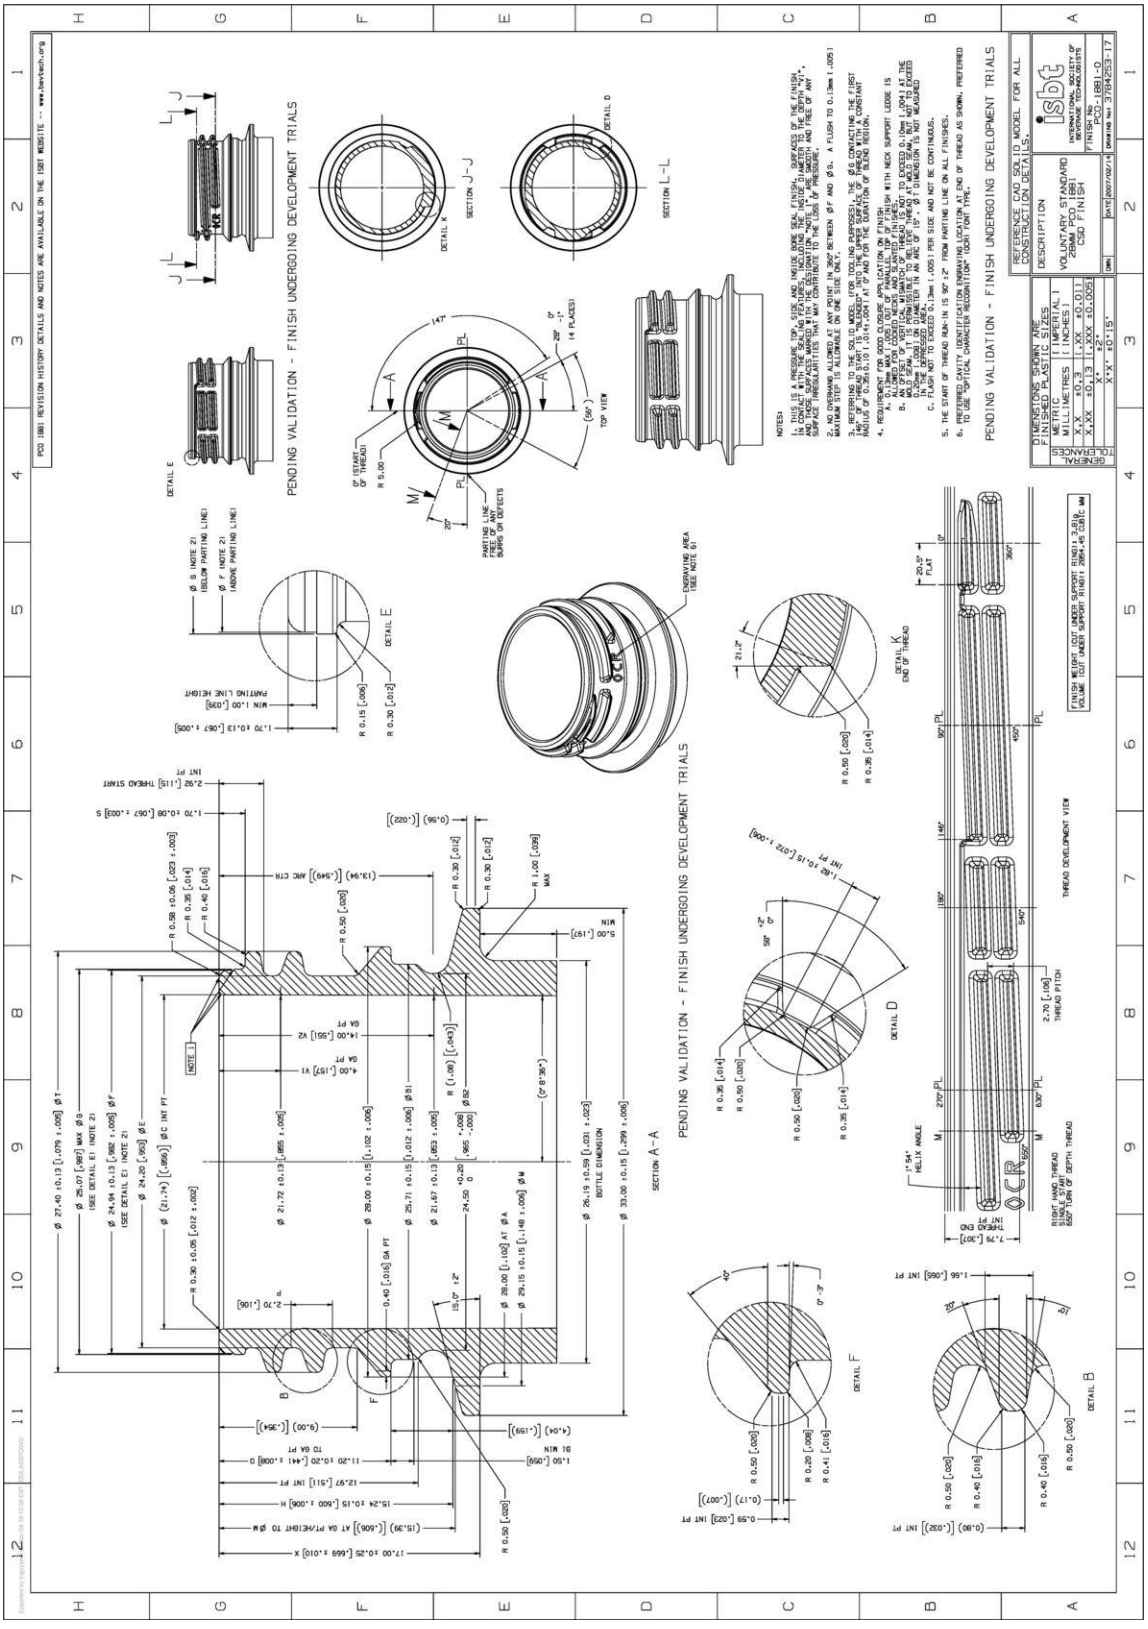

Highly Confidential and Proprietary Information - Do Not Duplicate