

A new software tool to facilitate environmental modelling procedures based on meteorological data management

Antonio M. Gómez-Orellana^{a,*}, Juan C. Fernández^{a,**}, Manuel Dorado-Moreno^a, Pedro A. Gutiérrez^a, César Hervás-Martínez^a

^a*Department of Computer Science and Numerical Analysis, University of Cordoba, 14071, Córdoba, Spain.*

Abstract

Meteorological data play an important role for the comprehension of the environment, and they are extensively used to perform environmental learning. Machine Learning (ML) techniques, a valuable support in many research areas, require datasets containing information related to the topic under study, which are not always available in an appropriate format, and its preparation implies a

En esta parte podríamos poner algo de lo que hemos puesto en la cover letter

Environmental Prediction and for Atmospheric Research Reanalysis Project. As the designed software is able to simplify the creation of the datasets (ready to be used as inputs for ML techniques in prediction tasks) and reduce the time needed for this task, researchers can benefit from it in order to achieve a more efficient exploitation and protection of environmental resources.

Keywords: Meteorological data, Reanalysis data, ~~Creating datasets~~,

Environmental prediction, Marine energy

integration datasets

*Corresponding author.

**Corresponding author.

Email addresses: am.gomez@uco.es (Antonio M. Gómez-Orellana), jfcaballero@uco.es (Juan C. Fernández), manuel.dorado@uco.es (Manuel Dorado-Moreno), pagutierrez@uco.es (Pedro A. Gutiérrez), chervas@uco.es (César Hervás-Martínez)

1. Introduction

A better understanding of the environment is of vital importance for science, contributing not only to more efficient exploitation of natural resources but also to the development of new strategies aimed at its protection. In that sense, meteorological observations provide an essential and valuable source of information which is widely used by researchers to address environmental learning, comprehension, prediction and conservation in numerous oceanic and atmospheric studies of a wide variety of areas (e.g. energy, climate change, agriculture, etc.). Some specific examples of the diversity of fields in which meteorological data can be used in are, among others: estimation of global solar radiation based on sunshine duration [1], directional analysis of sea storms [2], assessment and control of wind turbine [3], wind power ramp events prediction [4], evaluation

of the responses exhibited by the system. The use of meteorological data for simulation of the system, or the use of a priori data to improve the interpretation of the results, are also possible. A esto también podríamos darle un ligero cambio, y no enfocarlo solo en la interpretación de ellos.

On the other hand, special purpose software is usually developed to help researchers to advance in their studies related to energy and environmental modelling, becoming a great support for decision-making in the exploitation and protection of the environment. In [9], a software tool for designing solar water heating systems is developed, which simulates different situations and finds the best technical and economical solution. In [10], an integrated simulation tool for the optimum design of bifacial solar panel with reflectors is presented. This tool can also be used to analyse the performance of the solar cells. A framework for data integration of offshore wind farms is implemented in [11] in order to facilitate data exchange and improve operation and maintenance practices. In [12], a load management application to maximize the used energy of thermal systems and reduce the costs and emissions is developed. A risk assessment tool to improve safety standards and emergency management in onshore wind farms,

is presented in [13]. Raabe et al. [14] developed two software tools, *Model of Equilibrium of Bay Beaches* (MEPBAY) and *Coastal Modelling System* (SMC), to support different operational levels of headland-bay beach in coastal engineering projects, and Motahhir et al. [15] developed an open hardware/software test
35 bench for solar tracker.

Marine energy prediction is currently a hot topic where meteorological data is used in. Marine Renewable Energy (MRE) is one of the most important renewable and sustainable energy sources available in our environment, and it includes ocean thermal energy, marine tidal current energy and wave energy,
40 among others. Its benefits and great potential [16] make it one of the most relevant natural resources, playing a crucial role not only in the reduction of the emission of greenhouse gases but also in all other aspects involved in the difficult challenge of the transition to a low carbon footprint society [17, 18]. Wave energy exhibits a more stable power supply than wind energy and even
45 solar energy. In recent years *Wave Energy Converters* (WECs) [19] have been developed and widely installed to transform this wave energy into electricity, which can be injected into the electric network or supplied to existing offshore oil and gas platforms [20] or seawater desalination plants [21], among others. WECs are mechanical devices that convert kinetic energy into electrical energy
50 by means of either the vertical oscillation of waves or the linear motion of them. Nevertheless, waves are difficult to be characterised due to their stochastic nature, because of the influence of a large number of environmental factors that exert on them [22]. As a consequence of this complexity, many aspects of WEC design, deployment and operation [23, 24, 25] need a proper prediction of waves,
55 in order to maximise the wave energy extraction. For this purpose WECs use wave *flux of energy* (F_e) which can be calculated from the two most important wave parameters in this regard: *significant wave height* (H_s) and *wave energy period* (T_e). Additionally, wave predictions are also helpful for designing offshore structures [26], operational works in the sea [27], providing technical
60 information to the coastal and coral reef planners in developing countries [28], etc.

Currently, and as a support to traditional study procedures, Machine Learning (ML) techniques [29, 30] are being widely used in numerous research fields related to classification, regression and optimisation tasks, obtaining significant
65 improvements in the performance of the results [31, 32, 33]. ML methodologies can be used not only by experienced computer scientists but also by other researchers. For example, the well-known *Waikato Environment for Knowledge Analysis* (WEKA) [34] software tool provides researchers with a wide collection of ML algorithms. In this way, ML techniques have been already applied
70 to tackle wave characterisation, accurately estimating H_s and T_e parameters [35, 36], given that robustness of ML methods can tackle the previously explained difficulties in wave energy prediction. The problem is that, in order to apply these methods, it is essential to obtain datasets with relevant information about the issue under study, used to infer knowledge. Usually, these datasets
75 are not publicly available in a friendly format, and their generation is the first step needed.

The information to create these datasets can be obtained from meteorological observations, but such information may be available in an inappropriate format and even contain missing values or measurements. Consequently, it is usually
80 required to perform pre-processing tasks for improving the quality of the data, such as the replacement of missing values, outlier detection or data normalisation, among others. Furthermore, if more than one source of information is used to achieve a better characterisation of the problem under study [37, 38, 39], then a data integration process, denominated as the matching process in this document, has to be carried out by the researchers to manually create the datasets
85 with the needed information. Moreover, depending on the subject and the ML technique to be applied, or even if the researcher considers other factors in order to improve the results or have more in-depth conclusions, the datasets would have to be updated afterwards. In summary, many important details and different
90 intermediate steps have to be considered when creating suitable datasets for ML techniques, resulting in an extremely tedious task.

The main purpose of this paper is to present a software tool able to prevent

Quizas esto del objetivo principal deberiamos ampliarlo y cambiarlo, porque c

researchers from performing this repetitive work and greatly simplify all the steps involved in the creation of datasets. The meteorological data considered for the tool come from two well-known sources of information: the *National Oceanic and Atmospheric Administration* (NOAA) *National Data Buoy Center* (NDBC) [40] and the *National Centers for Environmental Prediction* (NCEP)/*National Center for Atmospheric Research* (NCAR) *Reanalysis Project* (NNRP or R1) [41, 42]. The software tool presented in this work is named SPAMDA (Software for Pre-processing and Analysis of Meteorological DAta to build datasets). As SPAMDA performs all this data processing, it reduces the time involving these tasks and allows the researchers focus on the study of the meteorological aspects of the observations. The datasets obtained are ready to be used as input for ML techniques in prediction tasks (classification or regression), although the researchers can use them for other purposes. These datasets contain one or more meteorological variables as inputs and one variable as target (variable to be predicted). The format of the generated datasets will be *Attribute-Relation File Format* (ARFF) [43], which is the one used by WEKA. Besides, the datasets can also be generated in *Comma-Separated Values* (CSV) format, enabling the researchers to use others tools.

Up to now, and to the best of our knowledge, this is the first software tool addressing the problem previously discussed, combining meteorological data from NDBC and NNRP. The advantages that SPAMDA offers to the researchers will be detailed in Section 3, although some of them are briefly summarised below:

- The ge
- means
- The cr
- It mak
- to wor
- It prov

Ojo, la sección 3 describe las características funcionales de la herram

- It avoids possible researcher errors in the intermediate steps of the process of creation of the datasets, such as time and geographical coordinates conversion or missing values handling, among others.
- 125 • It includes different pre-processing tasks, such as normalisation and missing data recovery.
- It facilitates data management and well-organised storage of the datasets.
- Its modular design allows the implementation of new functional modules for managing meteorological data from others sources for renewable energy and environmental research.
- 130 • It includes an user-friendly GUI, facilitating and greatly simplifying data management, and it is integrated with the Explorer environment of WEKA.
- It is multi-platform, and it can be used on any computer with Java regardless of the operating system.

135 This paper is organised as follows: Section 2 describes the sources of information used by SPAMDA for creating datasets. Section 3 describes in detail the features of the software tool. Section 4 shows a case study describing the use of SPAMDA in a practical approach. Section 5 provides the final conclusions and future work.

140 2. Meteorological data sources

The data provided by the above-mentioned sources of information of SPAMDA is described below:

- NDBC is a part of the *National Weather Service* (NWS). NDBC designs, develops, operates, and maintains a network of data collecting buoys (sta-
145 tions). The mission of the network is to collect real-time marine meteorological and oceanographic observations, such as H_s , dominant wave period, or wind speed and direction, among others.

The buoys maintained by NDBC are deployed in the coastal and offshore waters around oceans and seas, and they are equipped with assorted sensors which allow them to perform different measurements. The information collected by the buoys is available on the NDBC website [44], and it is divided into different groups. One of them corresponds to standard meteorological information of the historical data collected by each buoy, which can be downloaded as annual text files and whose format was adopted by NDBC since January 2007 [45]. These files contain hourly measurements per day from 00:50 to 23:50 UTC (Universal Time Coordinated) and from 23:50 31th December of the previous desired year to 22:50 31th December of the desired year. In Table 1, a comprehensive measurement description and the corresponding units are provided as a summary for the reader. A fragment of one of these files, which contains the measurements collected during year 2017 by the buoy identified as *Station 46001* in NDBC, is shown in Fig. 1. Each column corresponds to a meteorological variable or attribute, and each row or instance corresponds to the values of the measurements collected by the buoy for each attribute at a specific date and time.

#YY	MM	DD	hh	mm	WDIR	WSPD	GST	WVHT	DPD	APD	MWD	PRES	ATMP	WTMP	DEWP	VIS	TIDE
#yr	mo	dy	hr	mn	degT	m/s	m/s	m	sec	sec	degT	hPa	degC	degC	degC	mi	ft
2016	12	31	23	50	279	6.4	7.3	2.41	12.90	6.50	999	1041.3	5.6	6.4	999.0	99.0	99.00
2017	01	01	00	50	291	6.3	7.3	2.13	7.14	6.08	999	1041.1	5.5	6.4	999.0	99.0	99.00
2017	01	01	01	50	293	5.3	6.6	2.39	7.69	6.64	999	1041.2	5.5	6.4	999.0	99.0	99.00
.
.
.
.
2017	12	31	20	50	999	3.0	4.4	4.98	12.90	8.57	201	1000.6	4.8	4.9	999.0	99.0	99.00
2017	12	31	21	50	999	3.8	6.3	4.64	10.00	8.55	150	1000.1	4.8	4.9	999.0	99.0	99.00
2017	12	31	22	50	999	3.4	5.2	4.40	12.90	8.40	200	998.9	4.7	4.9	999.0	99.0	99.00

Figure 1: A fragment of an annual text file of the *Station 46001*.

Note that the data collected by the network of buoys may be incomplete due to diverse circumstances such as the weather conditions in which the buoys have to operate, failures or malfunctioning elements of the buoys, among others. Accordingly, it may be the situation that some of the measurements are completely missing (missing date or instance) or par-

Table 1: Measurements descriptions and units of each meteorological variable or attribute collected by the buoys.

Attribute	Units	Description
WDIR	degT	Wind direction (the direction the wind is coming from in degrees clockwise from true North) during the same period used for WSPD.
WSPD	m/s	Wind speed (m/s) averaged over an eight-minute period for buoys and a two-minute period for land stations. Reported Hourly.
GST	m/s	Peak 5 or 8 second gust speed (m/s) measured during the eight-minute or two-minute period.
WVHT	m	Significant wave height (meters) is calculated as the average of the highest one-third of all of the wave heights during the 20-minute sampling period.
DPD	sec	Dominant wave period (seconds) is the period with the maximum wave energy.
APD	sec	Average wave period (seconds) of all waves during the 20-minute period.
MWD	degT	The direction from which the waves at the dominant period (DPD) are coming. The units are degrees from true North, increasing clockwise, with North as 0 (zero) degrees and East as 90 degrees.
PRES	hPa	Sea level pressure (hPa). For C-MAN sites and Great Lakes buoys, the recorded pressure is reduced to sea level using the method described in NWS Technical Procedures Bulletin 291 (11/14/80).
ATMP	degC	Air temperature (Celsius degrees).
WTMP	degC	Sea surface temperature (Celsius degrees). For buoys the depth is referenced to the hull's waterline. For fixed platforms it varies with tide, but is referenced to, or near Mean Lower Low Water (MLLW).
DEWP	degC	Dewpoint temperature taken at the same height as the air temperature measurement.
VIS	nmi	Station visibility (nautical miles). Note that buoy stations are limited to reports from 0 to 1.6 nmi.
TIDE	ft	The water level in feet above or below MLLW.

tially missing (some measurements not recorded), by a buoy or by a set of buoys, once in a while or over a period of time. It may be also possible that the measurements have been recorded at a time different from the

expected one. These aspects have to be taken into account when creating
175 the datasets. This casuistry is explained in detail in Appendix A 5.

- NNRP provides three-dimensional global reanalysis of numerous meteorological variables (e.g. air temperature, components South-North and West-East of wind speed, relative humidity, pressure, etc.), which is available monthly, daily and every 6 hours at 00 Z (Zulu time), 06 Z, 12 Z
180 and 18 Z from 1948 on a global $2.5^\circ \times 2.5^\circ$ grid. Weather observations are from different sources, such as ships, satellites and radar, among others. Reanalysis data is created assimilating such observations using the same climate model throughout the entire reanalysis period in order to reduce the effects of modelling changes on climate statistics. Such information
185 has become a substantial support of the needs of the research community, even more in locations where instrumental (real time) data is not available.

The reanalysis data is available in the NNRP website [46], which it is accessible through different sections. Such data can be fully (a global $2.5^\circ \times 2.5^\circ$ grid) or partially (only the desired reanalysis nodes or sub-grid)
190 downloaded as *Network Common Data Form* (NetCDF) files [47], a special binary format for representing scientific data, which provides a description of the file contents and also includes the spatial and temporal properties of the data. Each reanalysis file contains the values of a meteorological variable estimated by a mathematical model for each reanalysis node. For
195 a better understanding, in Fig. 2 an approximate representation of a sub-grid containing six reanalysis nodes around the geographical location of a buoy (obtained from NDBC) is shown.

Therefore, with both sources of information, which complement each other, and carrying out a matching process, SPAMDA will create datasets for prediction tasks. In this way, the dataset input variables will be one or more reanalysis
200 variables from NNRP and one or more measurements from NDBC. The dataset output variable will always be one measurement from NDBC.



Figure 2: Example of a six sub-grid reanalysis nodes around the *Station 46001*.

3. SPAMDA

SPAMDA combines meteorological information from NDBC and NNRP to
 205 obtain new datasets for oceanic and atmospheric studies. In order to do so,
 SPAMDA manages three different types of datasets, which will be described in
 detail in the following sections, but are briefly introduced bellow for giving the
 reader a better general understanding:

- *Intermediate datasets*: They contain the meteorological observations from
 210 NDBC.
- *Pre-processed datasets*: They are obtained as a result of pre-processing
 tasks performed on the intermediate datasets.
- *Final datasets*: Created by merging an intermediate or pre-processed
 dataset (which contain the information from NDBC) with the reanalysis
 215 data from NNRP. This procedure is referenced in SPAMDA as matching
 process and will be carried out according to the study to be performed
 (classification or regression).

SPAMDA consists of three main functional modules, whose main features,
 represented in Fig. 3, are the following:

- *Manage buoys data*: The aim of this module is to provide features for the
 220 management and analysis of the information related to the buoys from
 NDBC. This includes:

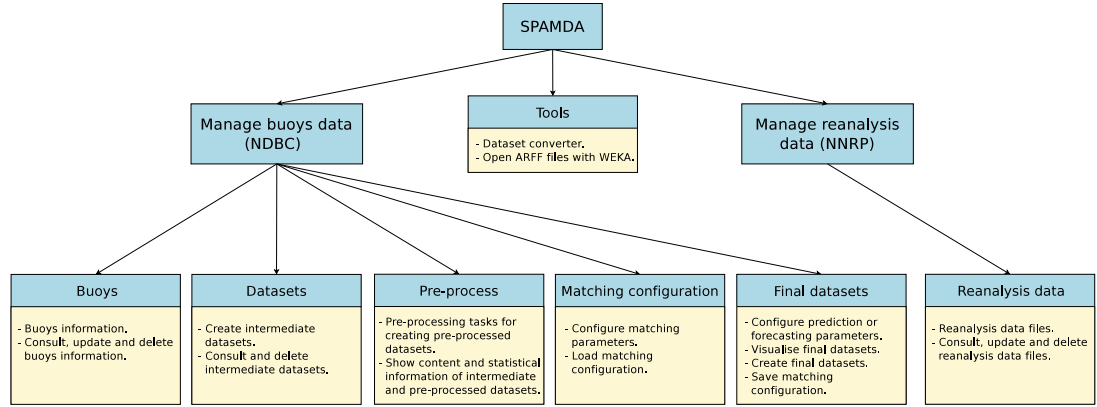


Figure 3: Brief outline of the functionality provided by SPAMDA.

1. Entering and updating the information of each buoy.
2. Creation of intermediate datasets with the collected measurements.
- 225 3. Pre-processing tasks for obtaining the pre-processed datasets.
4. Matching process to merge the information from NDBC and NNRP
5. Creation of the final datasets accordingly to the ML technique to use (classification or regression).

- *Manage reanalysis data*: This module is used for the management of the reanalysis data provided by the NNRP. In this way, the researchers can keep the reanalysis data files updated for their studies. Such files will be used, depending on the researchers needs, in the matching process when obtaining the final datasets.

- *Tools*: This module includes features for converting intermediate or pre-processed datasets to ARFF or CSV format and for opening ARFF files with WEKA software.

In the following subsections each integrated functional module is described in detail.

3.1. Buoys

240 When a new buoy is included in SPAMDA the following information, which
can be obtained from NDBC, is requested:

- *Station ID*: An alphanumeric identifier that allows easy identification of the buoy.
- *Description*: A short description of the buoy.
- 245 • *Latitude*: North or South geographical localisation (degrees) of the buoy.
- *Longitude*: West or East geographical localisation (degrees) of the buoy.
- *Measurements files*: The above-mentioned annual text files of the standard meteorological information collected by the buoy and downloaded from the NDBC website. This will be used for the creation of the intermediate
250 datasets. One file per year is expected.

For clarification, an example is presented in Fig. 4, where the buoy ID1 has three annual text files and the buoy ID2 has two annual text files.

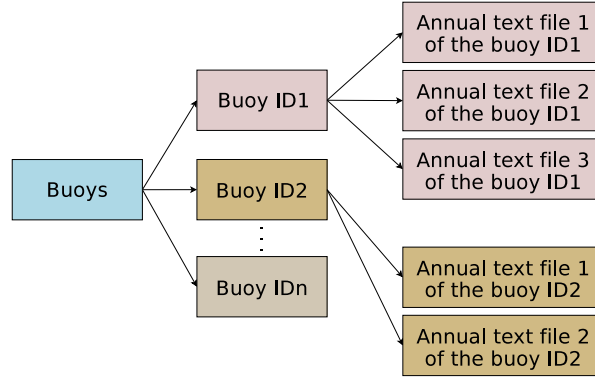


Figure 4: Example of entering two buoys with its annual text files.

3.2. Datasets

Once a buoy has been included as described in Section 3.1, it is possible
255 to create datasets with one or more annual text files, which are referenced in

SPAMDA as intermediate datasets. In this module, the researchers can manage intermediate datasets of each buoy, which are the baseline for their studies, by creating new ones or deleting the unnecessary ones.

When an intermediate dataset is created, it is associated with its corresponding buoy. Besides, a summary of its content is also created, providing relevant information such as the number of instances, the dates of the first and last measurements, the annual text files included, and the missing and duplicated dates.

An example where three intermediate datasets have been created is presented in Fig. 5. The two intermediate datasets of the buoy ID1 contain meteorological data of different years, and the intermediate dataset of the buoy ID2 contains meteorological data of two years. For each buoy, as many intermediate datasets as needed can be created.

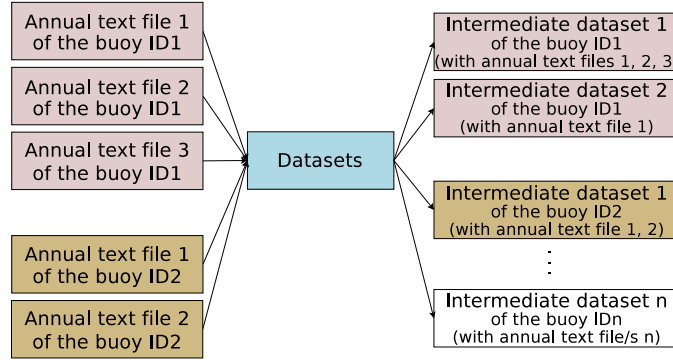


Figure 5: Example of the creation of the intermediate datasets.

3.3. Pre-process

Data pre-processing prepares the raw data (intermediate datasets) to be able to be treated correctly by ML algorithms. In this way, the quality of data can be improved prior to the learning phase, by applying pre-processing tasks (filters). The result will be referenced as pre-processed datasets.

SPAMDA provides several filters grouped in three categories, *Attribute*, *Instance* and *Recover missing data*, including the configuration of their parameters

and a short description of them:

- *Attribute*: All theses filters can be applied to the attributes (variables of the buoy from NDBC) of the intermediate dataset.
 - *Normalize*: This filter normalises all numeric values of each attribute. The resulting values are by default in the interval $[0,1]$.
280
 - *Remove*: It removes an attribute or a range of them.
 - *RemoveByName*: It removes attributes based on a regular expression matched against their names.
 - *ReplaceMissingValues*: For each attribute, all the missing values will be replaced by the average value of the attribute.
285
 - *ReplaceMissingWithUserConstant*: This filter replaces all the missing values of the attributes with an user-supplied constant value.
- *Instance*: All theses filters can be applied to the instances (hourly measurements of the buoy from NDBC) of the intermediate dataset.
 - *RemoveDuplicates*: With this filter, all duplicated instances are removed.
290
 - *RemoveWithValues*: This filter removes all the instances that match the attribute and the value supplied by the user.
 - *SubsetByExpression*: It removes all the instances which do not match a user-specified expression.
295
- *Recover missing data*: All these filters can be applied to the instances of the intermediate dataset.
 - *Replace missing values with next nearest hour*: The missing values of each attribute are replaced with the next nearest non missing value.
 - *Replace missing values with previous nearest hour*: This filter replaces the missing values of each attribute with the previous nearest non missing value.
300

- *Replace missing values with next n hours mean*: The missing values of each attribute are replaced with the next n nearest non missing values mean, where n can be configured by the user.
- *Replace missing values with previous n hours mean*: This filter replaces the missing values of each attribute in the intermediate dataset with the previous n nearest non missing values mean.
- *Replace missing values with symmetric n hours mean*: The missing values of each attribute in the intermediate dataset are replaced with the n previous and n next non missing values mean.

SPAMDA allows the researchers to undo the last filter applied or to restore the initial content of the intermediate dataset. Besides, the content and relevant statistical information (number of instances with missing values, minimum and maximum values, mean and standard deviation) of the intermediate and the pre-processed datasets can be visualised in this module.

Fig. 6 shows an example where the intermediate datasets 1 and 2 of the buoy ID1 have been pre-processed, obtaining as a result the pre-processed dataset 1 of each one. The intermediate dataset 1 of the buoy ID2 has been also pre-processed. *Pre-processed dataset n* represents that the researchers can create as many pre-processed datasets as they consider opportune.

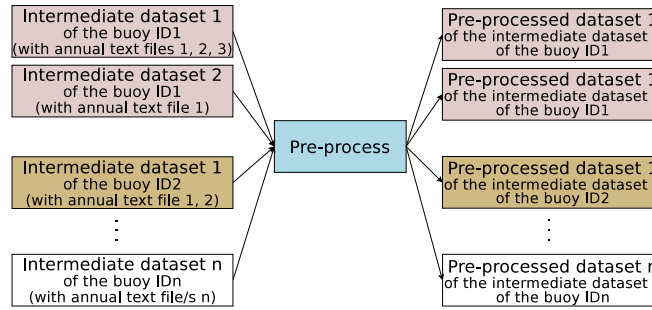


Figure 6: Example of the creation of pre-processed datasets.

3.4. Matching configuration

In order to use the data provided by the two sources of information described in Section 2, it is necessary to carry out a data integration process, denominated
325 as the matching process in this document, to merge and format such data. The matching procedure is performed using an intermediate or pre-processed dataset, which includes the measurements collected by a buoy from NDBC, and the needed reanalysis data files from NNRP. Note that SPAMDA is able to manage the NetCDF binary format for handling the information stored in the
330 reanalysis files.

Such process merges the information of both sources that match on time, but, given that the measurements of the buoys are hourly collected from 00:50 to 23:50 UTC, and the reanalysis data is available every 6 hours at 00 Z, 06 Z, 12 Z and 18 Z, the matching can only be carried every 6 hours (discarding the rest of
335 measurements from the buoy data). Besides, and since there is still a difference of 10 minutes, the matching with the reanalysis data will be performed with the nearest buoy measurement (before or after) within a maximum of 60 minutes of difference. Finally, the matched instances of both sources will form the final datasets.

340 Fig. 7 presents an example of matching with the measurements collected during 2017 by *Station 46001* (NDBC) and the reanalysis data (NNRP) of the variable *pressure* for reanalysis nodes $57.5\text{ N} \times 147.5\text{ W}$ and $55.0\text{ N} \times 147.5\text{ W}$ in the same year. In this way, only the instances from both sources that are linked with arrows (highlighted in green colour) will be used in the creation
345 of the final datasets. Although the reanalysis dates have been presented in a human readable format, note that reanalysis dates are stored in hours from 01-01-1800, and they have to be transformed for comparison taking into account the time zone. Such transformation is automatically done by SPAMDA when matching the instances.

350 The reader can check in Appendix A 5 an example with a more complex case of the procedure.

SPAMDA allows the researchers to perform a customisable matching process,

#YY	#yr	mo	dy	hr	mm	WDIR	WSPD	GST	WVHT	DPD	APD	MWD	PRES	ATMP	WTMP	DEWP	VIS	TIDE
yr	mo	dy	hr	mm	degT	m/s	m/s	m	sec	sec	degT	hPa	degC	degC	degC	mi	ft	
2016	12	31	23	50	279	6.4	7.3	2.41	12.90	6.50	999	1041.3	5.6	6.4	999.0	99.0	99.00	
2017	01	01	00	50	291	6.3	7.3	2.13	7.14	6.08	999	1041.1	5.5	6.4	999.0	99.0	99.00	
2017	01	01	01	50	293	5.3	6.6	2.39	7.69	6.64	999	1041.2	5.5	6.4	999.0	99.0	99.00	
2017	01	01	02	50	297	3.9	4.9	2.57	14.81	7.39	999	1041.1	5.5	6.4	999.0	99.0	99.00	
2017	01	01	03	50	298	5.7	6.7	1.83	7.69	5.80	999	1041.4	5.6	6.4	999.0	99.0	99.00	
2017	01	01	04	50	281	5.0	6.1	2.29	13.79	7.14	999	1041.5	5.6	6.4	999.0	99.0	99.00	
2017	01	01	05	50	293	6.1	7.6	2.17	12.90	6.88	999	1041.7	5.6	6.4	999.0	99.0	99.00	
2017	01	01	06	50	314	4.2	5.4	2.24	12.12	7.09	999	1042.1	5.5	6.4	999.0	99.0	99.00	
2017	01	01	07	50	297	4.4	5.2	1.97	13.79	6.64	999	1041.9	5.5	6.4	999.0	99.0	99.00	
2017	01	01	08	50	287	4.6	5.6	2.06	12.90	7.26	999	1041.8	5.5	6.4	999.0	99.0	99.00	
2017	01	01	09	50	304	3.2	4.1	1.82	12.12	6.65	999	1041.5	5.6	6.4	999.0	99.0	99.00	
2017	01	01	10	50	274	2.9	3.9	1.92	12.90	6.88	999	1041.4	5.5	6.4	999.0	99.0	99.00	
2017	01	01	11	50	287	1.3	1.7	1.60	12.90	6.66	999	1041.1	5.4	6.4	999.0	99.0	99.00	
2017	01	01	12	50	260	2.0	3.0	1.67	12.90	6.95	999	1040.7	5.4	6.4	999.0	99.0	99.00	
.
.
.
.
2017	12	31	11	50	999	14.5	17.7	5.70	9.09	7.67	134	999.3	5.4	4.9	999.0	99.0	99.00	
2017	12	31	12	50	999	11.8	14.7	6.21	10.00	8.52	125	1001.0	5.5	4.9	999.0	99.0	99.00	
2017	12	31	13	50	999	10.1	12.6	5.52	10.81	8.49	165	1002.0	5.3	4.9	999.0	99.0	99.00	
2017	12	31	14	50	999	8.6	10.5	5.47	10.00	8.61	150	1002.5	5.3	4.9	999.0	99.0	99.00	
2017	12	31	15	50	999	7.1	9.1	5.83	12.90	9.27	216	1002.7	5.2	4.9	999.0	99.0	99.00	
2017	12	31	16	50	999	6.4	8.4	5.82	11.43	9.35	177	1002.7	5.1	4.9	999.0	99.0	99.00	
2017	12	31	17	50	999	5.3	7.4	5.52	11.43	9.04	182	1002.4	5.0	4.9	999.0	99.0	99.00	
2017	12	31	18	50	999	2.8	4.6	5.00	11.43	8.82	179	1002.0	4.8	4.9	999.0	99.0	99.00	
2017	12	31	19	50	999	3.4	5.0	4.87	12.12	8.63	200	1001.6	5.0	4.9	999.0	99.0	99.00	
2017	12	31	20	50	999	3.0	4.4	4.98	12.90	8.57	201	1000.6	4.8	4.9	999.0	99.0	99.00	
2017	12	31	21	50	999	3.8	6.3	4.64	10.00	8.55	150	1000.1	4.8	4.9	999.0	99.0	99.00	
2017	12	31	22	50	999	3.4	5.2	4.40	12.90	8.40	200	998.9	4.7	4.9	999.0	99.0	99.00	

57.5 N
147.5 W

55.0 N
147.5 W

Date

Pres

Pres

2017 01 01 00 00 106400

2017 01 01 06 00 106400

2017 01 01 12 00 106380

2017 01 01 18 00 106270

2017 01 02 00 00 106150

2017 01 02 06 00 106030

2017 01 02 12 00 105960

2017 01 02 18 00 105980

2017 01 03 00 00 106010

2017 01 03 06 00 106080

2017 01 03 12 00 106100

2017 01 03 18 00 106090

2017 01 04 00 00 106070

2017 01 04 06 00 106040

2017 12 31 12 00 102520

2017 12 31 18 00 102660

Figure 7: An example of matching the data from NDBC (left) and NNRP (right).

for obtaining as many different versions of the same meteorological data as needed. Prediction tasks are based on the estimation of the output attribute using the information provided by the input attributes. Depending on the task, the datasets must be prepared and configured differently:

- *Classification*: The final datasets will be ready to use as input for ML classifiers, requiring a nominal output attribute, whose specific preparation is detailed in Section 3.5.
- *Regression*: The final datasets will be ready to use as input for regression methods, requiring a real output attribute, whose preparation is also explained in Section 3.5.
- *Direct matching*: In this case the inputs attributes have a direct correspondence with the output attribute, and it is not necessary to perform any additional preparation. Both input and target attributes are synchronised in time, in such a way that the final dataset is not intended for prediction purposes. For example, the final datasets may be used in lost data recovering tasks, in correlation studies, in descriptive analyses, etc.

The following parameters can be specified for the matching process:

- *Flux of energy* [38]: When the F_e is selected, it will be used as output. This attribute is not collected by the buoys, but it can be calculated from two wave parameters: H_s and T_e , which are collected as WVHT and APD attributes, respectively, and were described in Table 1. In this way, SPAMDA obtains the F_e of each instance using the following equation:

$$F_e = 0.49 \cdot H_s^2 \cdot T_e, \quad (1)$$

370 where F_e is measured in kilowatts per meter, H_s is measured in meters and T_e is measured in seconds. Note also that F_e is defined in Eq. 1 as an average energy flux (H_s is a kind of average wave height), though for simplicity it will be referred just as flux of energy.

- *Attribute to predict*: Instead of using F_e , researchers can select any of the 375 attributes collected by the buoys as output (e.g. significant wave height, WVHT, wind direction, WDIR, sea level pressure, PRES, etc.). Therefore, they can conduct different studies by selecting one attribute or other.

- *Reanalysis data files*: In order to have a possible better description of the problem under study, more than one reanalysis variable can be considered 380 as input. Remember that these files have to be previously downloaded from the NNRP website [46], which should set the range of dates (temporal properties) and the desired sub-grid (spatial properties, see Fig. 2) for each variable of reanalysis.

385 In that sense, the reanalysis data files must have the same spatial and temporal properties but related to different variables. SPAMDA simplifies this task by showing the reanalysis data files that are compatibles each other, and checking that the selection made by the researches meets that condition.

- *Buoys attributes*: In addition to the reanalysis variables, the final datasets 390 will also include the selected attributes as inputs (of the intermediate or pre-processed dataset used), providing a possible better characterisation

of the problem under study, although it will depend on how correlated the attributes are.

- *Include missing dates:* As above-mentioned, the information collected by a buoy may be incomplete due to measurements not recorded by it. As a consequence, the matching of instances between both sources of information may not be possible (missing dates). In that situation, the researchers can consider two options: 1) discard the instances affected or 2) include them. In the latter case, the final datasets will contain the affected instances, but the measurements of the buoy will be stored as missing values in WEKA format, denoted as «?».

- *Nearest reanalysis nodes to consider:* As already shown in Fig. 2 (which represents six reanalysis nodes), the reanalysis data files may contain information of several reanalysis nodes. In this way, the researcher can:

- Consider all the reanalysis nodes contained in each file: in this case, the information provided by each reanalysis node contained in each selected reanalysis data file will be used.
- Consider only some of the reanalysis nodes contained in each file: in this case, only the information of the N closest reanalysis nodes to the buoy will be used (N given by the user). To do that, SPAMDA uses the *Haversine* equation [48] to calculate the distance from each reanalysis node to the location of the buoy and obtain the closest ones. Haversine equation is also known as the great circle distance and performs calculation from main point to destination point with a trigonometric function using latitude and longitude:

$$\begin{aligned}
 d(p_0, p_j) = & \arccos(\sin(lat_0) \cdot \sin(lat_j) \\
 & \cdot \cos(lon_0 - lon_j) + \cos(lat_0) \\
 & \cdot \cos(lat_j)),
 \end{aligned} \tag{2}$$

where p_0 is the buoy geographical location, p_j stands for the location

of each reanalysis node, and *lat* and *lon* are the latitude and longitude of the points, respectively.

- *Number of final datasets*: Depending on the number of nearest reanalysis nodes to consider, the number of final datasets to create and the content of them can be configured according to the following options:

- *One (using weighted mean of the N nearest reanalysis nodes)*: Only one final dataset will be created, which will contain the attributes (the selected one as output and the selected ones as inputs) of the intermediate or pre-processed dataset used, along with a weighted mean of each variable of the reanalysis data used (one per selected reanalysis data file). This weighted mean is obtained by SPAMDA and uses Eq. 2 to obtain the distance from each reanalysis node to the location of the buoy. Once the distances have been calculated they are inverted and normalised as follows:

$$w_i = \frac{\sum_{j=1}^N d(p_0, p_j)}{d(p_0, p_i)}, \quad i = 1, \dots, N. \quad (3)$$

With these weights, a weighted mean of each variable of reanalysis is obtained for each of the N nodes. Therefore, the closest reanalysis nodes to the localisation of the buoy will provide more information.

Considering as example the two nearest reanalysis nodes represented in Fig. 2 and the reanalysis variables air temperature and pressure, the weighted mean of each reanalysis variable will be calculated using the reanalysis nodes $57.5^\circ \text{ N} \times 147.5^\circ \text{ W}$ and $55.0^\circ \text{ N} \times 147.5^\circ \text{ W}$.

- *'N' (one per each reanalysis node)*: As many final datasets as the number of nearest N reanalysis nodes configured by the researcher will be created. Therefore, each final dataset will contain the value of each reanalysis variable used of the nearest corresponding reanalysis node, along with the selected attributes of the intermediate or pre-processed dataset used.

445 In this case, and considering as example the four closest reanalysis
nodes (see Fig. 2) and the reanalysis variables air temperature and
pressure, four final datasets will be created, containing each one the
information of both reanalysis variables of the corresponding reanal-
450 ysis node: $57.5\text{ N} \times 147.5\text{ W}$, $55.0\text{ N} \times 147.5\text{ W}$, $57.5\text{ N} \times 150.0$
W and $55.0\text{ N} \times 150.0\text{ W}$, along with the selected attributes of the
intermediate or pre-processed dataset used.

Once the matching parameters have been described, for a better understand-
ing of them, Fig. 8 presents an example of the matched information considering
the data shown in Fig. 7 and using the following matching configuration¹:

- 455 • Variable WVHT as attribute to predict.
- Variable Pres as reanalysis input attribute.
- Variable WSDP as buoy input attribute.
- Not including missing dates.
- Considering the closest reanalysis node.
- 460 • Task to be used: *Direct matching*.

3.5. Final datasets

Once the matching process has been performed with the desired configura-
tion, it is necessary to prepare the matched information for the desired predic-
tion task (*Regression* or *Classification*), obtaining as a result the final datasets.
465 Remember that *Direct matching*, as it was described in Section 3.4, performs
a direct correspondence between the attributes used as inputs and the output
one, and it is not necessary to carry out any preparation.

SPAMDA allows the researchers to make such preparation by means of the
following options:

¹Note that the date is shown just for better understanding, but it will not be included in
the final dataset.

Date	Pres	WSPD	WVHT
2017 01 01 00 00	106400	6.4	2.41
2017 01 01 06 00	106400	6.1	2.17
2017 01 01 12 00	106380	1.3	1.60
2017 01 01 18 00	106270	2.4	1.33
2017 01 02 00 00	106150	1.2	0.94
2017 01 02 06 00	106030	3.0	1.42
2017 01 02 12 00	105960	3.1	1.99
2017 01 02 18 00	105980	2.5	2.52
2017 01 03 00 00	106010	3.5	2.03
2017 01 03 06 00	106080	5.1	1.84
2017 01 03 12 00	106100	5.4	1.81
2017 01 03 18 00	106090	5.6	1.60
2017 01 04 00 00	106070	7.0	1.54
2017 01 04 06 00	106040	7.4	1.73
.	.	.	.
.	.	.	.
.	.	.	.
2017 12 31 12 00	102520	14.5	5.70
2017 12 31 18 00	102660	5.3	5.52

Figure 8: An example of the matched information for *Direct matching*.

- *Prediction horizon* (Classification and Regression): This option indicates the time gap for moving backward the attribute to predict (output attribute). In this way, the input attributes (variables of the buoy and reanalysis data) will be used to predict the output attribute in a specific future time (e.g. +6h, +12h, +18h, +1 day, etc.).

The minimum interval for increasing and decreasing the prediction horizon is 6h (due to reanalysis data temporal resolution) [4], the same interval used when the matching process is carried out. Therefore, for each increment of the prediction horizon, an instance of the dataset is lost (as this future information is not available). As the minimum prediction horizon is 6h, at least one instance will be lost. The relation between the inputs and the attribute to predict will be defined as follows:

$$o_{t+\Delta t} = \phi(\mathbf{b}_t, \mathbf{r}_t), \quad (4)$$

where t represents the time instant to study and Δt the prediction horizon; o is the attribute to be predicted, \mathbf{b}_t is the vector containing the selected NDBC variables and \mathbf{r}_t is the vector containing the selected reanalysis variables. In this way and considering the matched information shown in Fig. 8, WVHT is o , the vector \mathbf{b} contains the variable WSPD and the vector \mathbf{r} contains Pres.

Optionally, the reanalysis variables can be synchronised with the attribute
490 to predict. Given that these variables are estimated by a mathematical
model, we can obtain very good future estimations, which can improve the
performance of the results. In this case, the relation between the inputs
and the attribute to predict would be:

$$o_{t+\Delta t} = \phi(\mathbf{b}_t, \mathbf{r}_{t+\Delta t}). \quad (5)$$

495 Note that the selected NDBC variables as input cannot be synchronised
with the attribute to predict.

For better understanding, considering the matched information shown in
Fig. 8, an example of the creation of one *Regression* dataset is shown in
Fig. 9. As mentioned earlier, this prediction task requires a real output
500 variable (in this case, WVHT, the last one). The options considered for
the preparation of each final dataset are the following:

- Do not synchronise the reanalysis data (see Eq. 4 for the relation
between the inputs and the output).
- A prediction horizon of 6h.

Date	Pres	WSPD	WVHT
2017 01 01 00 00	106400	6.4	2.17
2017 01 01 06 00	106400	6.1	1.60
2017 01 01 12 00	106380	1.3	1.33
2017 01 01 18 00	106270	2.4	0.94
2017 01 02 00 00	106150	1.2	1.42
2017 01 02 06 00	106030	3.0	1.99
2017 01 02 12 00	105960	3.1	2.52
2017 01 02 18 00	105980	2.5	2.03
2017 01 03 00 00	106010	3.5	1.84
2017 01 03 06 00	106080	5.1	1.81
2017 01 03 12 00	106100	5.4	1.60
2017 01 03 18 00	106090	5.6	1.54
2017 01 04 00 00	106070	7.0	1.73
2017 01 04 06 00	106040	7.4	1.64
.	.	.	.
.	.	.	.
.	.	.	.
2017 12 31 12 00	102520	14.5	5.52

Figure 9: An example of the creation of a *Regression* dataset, with a prediction horizon of 6h
and without synchronisation.

505 Note that, due to prediction horizon is 6h, the values of WVHT attribute
are moved backward one instance (up). As a consequence, the last instance

(2017/12/31 18:00) is lost and is not included in the final dataset. Besides, and because the reanalysis data has not been synchronised, the values of the Pres and WSPD variables are at the same time instant (t in Eq. 4).

Moreover, considering again the matched information shown in Fig. 8, an example of the creation of the same dataset but applying synchronisation (see Eq. 5) is shown in Fig. 10.

Date	Pres	WSPD	WVHT
2017 01 01 00 00	106400	6.4	2.17
2017 01 01 06 00	106380	6.1	1.60
2017 01 01 12 00	106270	1.3	1.33
2017 01 01 18 00	106150	2.4	0.94
2017 01 02 00 00	106030	1.2	1.42
2017 01 02 06 00	105960	3.0	1.99
2017 01 02 12 00	105980	3.1	2.52
2017 01 02 18 00	106010	2.5	2.03
2017 01 03 00 00	106080	3.5	1.84
2017 01 03 06 00	106100	5.1	1.81
2017 01 03 12 00	106090	5.4	1.60
2017 01 03 18 00	106070	5.6	1.54
2017 01 04 00 00	106040	7.0	1.73
2017 01 04 06 00	105950	7.4	1.64
.	.	.	.
.	.	.	.
.	.	.	.
2017 12 31 12 00	102660	14.5	5.52

Figure 10: An example of the creation of a *Regression* dataset, with a prediction horizon of 6h and with synchronisation.

Again, and due to the prediction horizon selected (6h), the values of the WVHT attribute are moved backward one instance (up) and the last instance (2017/12/31 18:00) is not included in the final dataset. But now, the values of the Pres variable are also moved backward one instance (due to the synchronisation). Therefore, in this case, Pres is at the same time instant as the attribute to predict ($t + \Delta t$ in Eq. 5).

- *Thresholds of the output attribute* (Classification): Since the values of the variables collected by the buoys are real numbers, it is necessary to discretise them (convert them from real to nominal values) for the attribute selected as output (attribute to be predicted). SPAMDA allows the researchers to perform this process by defining the necessary classes with their thresholds, which will be used to carry out such discretisation.

Considering again the matched information shown in Fig. 8, an example

of the creation of a *Classification* dataset is shown in Fig. 11. The options considered for the preparation of the final dataset are the following:

- Do not synchronise the reanalysis data.
- A prediction horizon of 6h.
- The thresholds shown in Table 2.

Table 2: Thresholds for the classification example represented in Fig. 11

Class	Description	Inferior [Superior)
Low	Low wave height	0.36	1.5
Average	Average wave height	1.5	2.5
Big	Big wave height	2.5	4.0
Huge	Huge wave height	4.0	9.9

Date	Pres	WSPD	Class_WVHT
2017 01 01 00 00	106400	6.4	Average
2017 01 01 06 00	106400	6.1	Average
2017 01 01 12 00	106380	1.3	Low
2017 01 01 18 00	106270	2.4	Low
2017 01 02 00 00	106150	1.2	Low
2017 01 02 06 00	106030	3.0	Average
2017 01 02 12 00	105960	3.1	Big
2017 01 02 18 00	105980	2.5	Average
2017 01 03 00 00	106010	3.5	Average
2017 01 03 06 00	106080	5.1	Average
2017 01 03 12 00	106100	5.4	Average
2017 01 03 18 00	106090	5.6	Average
2017 01 04 00 00	106070	7.0	Average
2017 01 04 06 00	106040	7.4	Average
.	.	.	.
.	.	.	.
.	.	.	.
2017 12 31 12 00	102520	14.5	Huge

Figure 11: An example of the creation a *Classification* dataset, with a prediction horizon of 6h and without synchronisation.

Note that the attribute to be predicted has been renamed to *Class_WVHT* to show that it is now a nominal variable, because its values have been discretised according to the thresholds. Besides, and due to the 6h prediction horizon, the last instance is lost (2017/12/31 18:00) and the values of the attribute *Class_WVHT* are moved backward one instance (up). As

the reanalysis data have not been synchronised, the values of the Pres and WSPD variables are at the same time instant (t in Eq. 4).

The content of the final datasets, obtained as the result of the preparation of the matched data, can be visualised to check everything before saving them
540 on disk. Such preparation can be performed as many times as required and considering the different options in each moment. Although the date will not be included in the final datasets, it can be shown to properly check the matching.

Finally, it is necessary to define the output configuration to create the final datasets:

- 545 • *Output path file*: Name of the final datasets and folder to save them on disk.
- *Final datasets format*:
 - *ARFF: Attribute-Relation File Format* [43], which is used by WEKA. SPAMDA allows the researchers to directly open the final datasets in
550 the Explorer environment of WEKA (in the same context of work), enabling them to choose the most appropriate ML method to tackle the problem under study.
 - *CSV: Comma-Separated Values*. This format is included in order to consider other different tasks of software tools.

555 A text file that summarises the configuration used in matching process and in the preparation of the matched data is also generated. It can be saved and loaded, enabling the researchers to resume their studies at any other time.

3.6. Manage reanalysis data

As mentioned in Section 2, the reanalysis data files provided by NNRP
560 contain the estimated values by a mathematical model of one meteorological variable.

In this module (see Fig. 3), SPAMDA includes features for entering new files and deleting the unnecessary ones. Besides, useful information about the

content of each reanalysis file can be consulted such as name of the file and the
 565 reanalysis variable, number of instances and reanalysis nodes, initial and final
 time, latitude and longitude. All these fields summarise the temporal and spatial
 properties of the data. Thus, the researcher can quickly and easily identify each
 reanalysis file entered in SPAMDA.

An example where two reanalysis data files have been entered in SPAMDA
 570 is shown in Fig. 12.

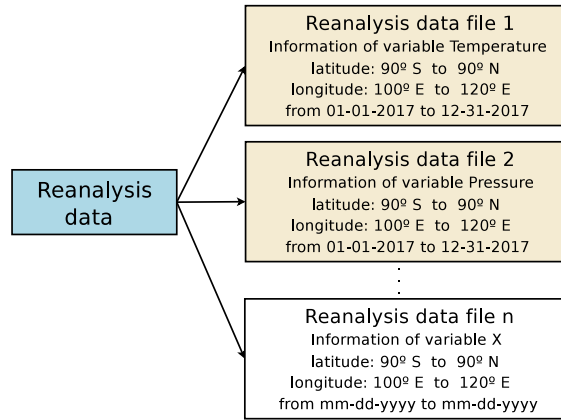


Figure 12: Example of entering two reanalysis data files.

3.7. Tools

SPAMDA also contains another module that provides two utilities: one of
 them is *Dataset converter* used for converting the desired intermediate or pre-
 processed datasets to ARFF or CSV formats; the other utility can be used
 575 for opening ARFF files with WEKA Explorer environment, which is useful for
 easily checking the results of different configurations of the pre-processing.

4. Case study

This section will describe how the application works in a practical approach.
 To do so, an example showing how to create a fully processed dataset (final
 580 dataset), starting from the raw data, will be described. The objective of this

final dataset is to be used with ML algorithms for environmental modelling, concretely, to classify waves in the Gulf of Alaska depending on their height. In this case, the problem will be tackled as a multi-class classification problem, given that any continuous variable can be discretised in different classes. Such waves modelling can be applied with different purposes, energy flux range forecasting, missing buoy data reconstruction, or extreme significant wave heights detection, among others.

4.1. Obtaining the final dataset

The data collected to perform this example is:

1. The measurements obtained from 2013 to 2017 by the buoy with ID 46001, placed in the Gulf of Alaska, which are provided by NDBC as annual text files. This data is publicly available at the NDBC website.
2. Complementary information collected from reanalysis data containing air temperature (air), pressure (pres) and two components of wind speed measurements: South-North (vwind) and West-East (uwind). This information will be collected from the four closest reanalysis nodes surrounding the geographical location of the buoy. This data is publicly available at the NNRP website and can be downloaded in NetCDF format. Concretely, the closest reanalysis nodes downloaded are $57.5\text{ N} \times 147.5\text{ W}$, $57.5\text{ N} \times 150\text{ W}$, $55\text{ N} \times 147.5\text{ W}$ and $55\text{ N} \times 150\text{ W}$. However, as will be seen later, only the information from the nearest node will be used in the data integration process.

After gathering the information described above², the researcher can open SPAMDA. In Figure 13, the main window is shown. In order to input the reanalysis data which will be used in further steps for creating the final dataset, the researcher has to select the option *Manage reanalysis data*.

²Further instructions for downloading this data can be found in the user manual of the application.

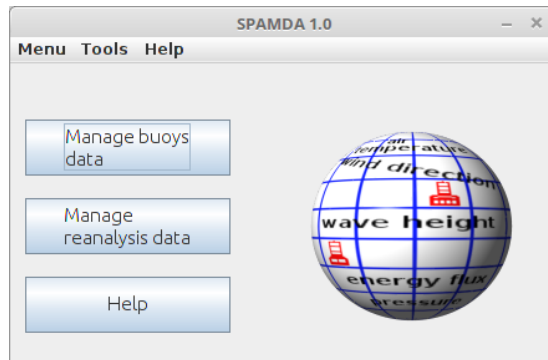


Figure 13: SPAMDA main window.

Then, the window of Figure 14 is shown. Here, using the buttons located at the bottom, it is possible to add, delete or consult any data from the different reanalysis files. Once the information has been introduced in the application, this window can be closed and the user can go back to the main window to continue entering the information related to the buoy under study.

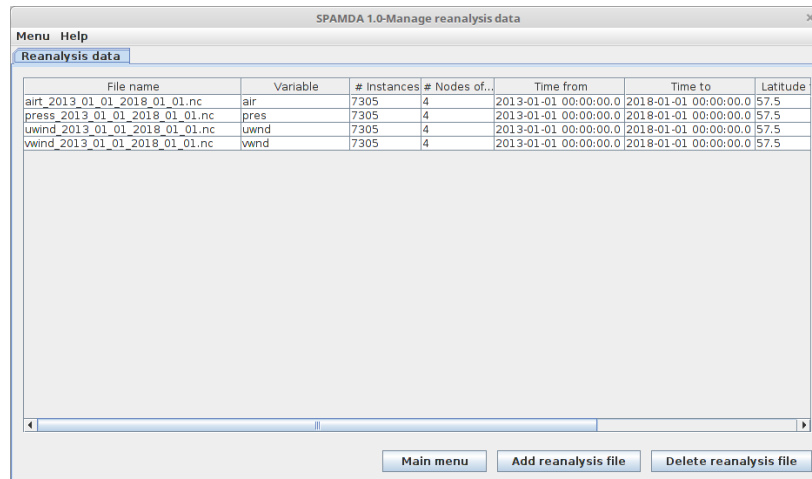


Figure 14: *Manage reanalysis data* window: downloaded files containing the four closest reanalysis nodes.

After that, the researcher has to select *Manage buoys data* to open the window shown in Figure 15, where several tabs are available. In *Buoys* tab, the

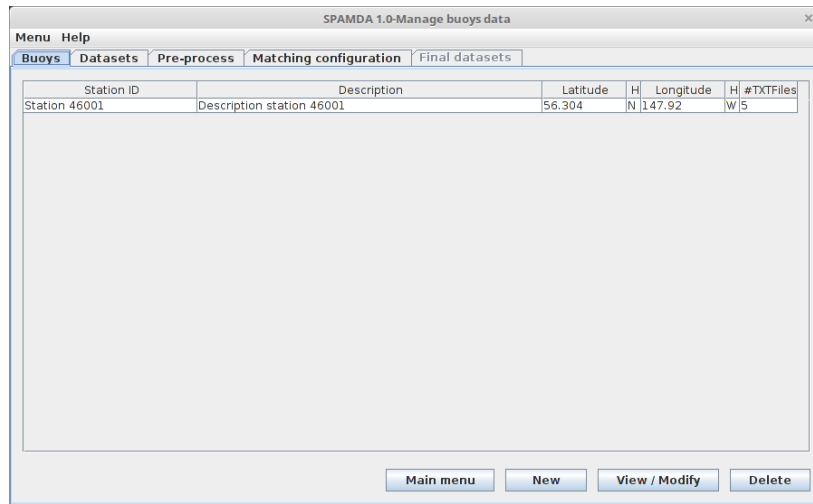


Figure 15: *Buoys* tab: buoy ID 46001.

researcher can consult, modify, add or delete different data related to the buoy.

615 In order to enter such data, click on the *New* button, and then the window shown in Figure 16 pops up.

The screenshot shows the 'SPAMDA 1.0-New buoy' window. It has a menu bar with 'Menu' and 'Help'. The window is divided into several sections:

- Information of the buoy:**
 - Station ID:** Station 46001
 - Description:** Description station 46001
 - Latitude [0,90]:** 56.304 **N**
 - Longitude [0,180]:** 147.92 **W**
- Other notations:**
 - Latitude: 56.304° Longitude: -147.92°
 - Latitude: 56.304° Longitude: 212.08° (used by reanalysis files)
 - Latitude: 56.304° Longitude: 327.92°
- Annual text files of the buoy:**
 - 46001h2013.txt (new)
 - 46001h2014.txt (new)
 - 46001h2015.txt (new)
 - 46001h2016.txt (new)
 - 46001h2017.txt (new)

At the bottom right are buttons: 'Add file', 'Delete file', 'Cancel', 'Save', and 'Clear'.

Figure 16: *New buoy* window: information of the buoy ID 46001.

Here the information about the buoy has to be included: the *Station ID*, its

description, geographical localisation and the corresponding annual text files. In this case, the files containing the data from year 2013 to 2017 are inserted
 620 by clicking on the *Add file* button. Once the data has been introduced, it is necessary to click on the *Save* button to insert the buoy in SPAMDA database. After that, the window can be closed.

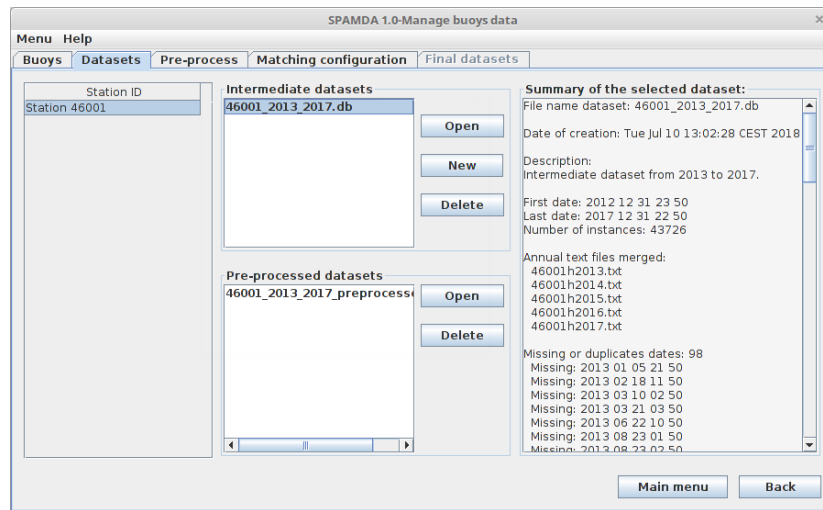


Figure 17: *Datasets* tab: intermediate datasets of the buoy ID 46001.

To create the intermediate dataset, the researcher has to double-click on the buoy under study or click on the *Datasets* tab (see Figure 15) to switch to the
 625 corresponding view (see Figure 17). In this view, the researcher can delete or consult a summary of each intermediate or pre-processed dataset by selecting it from the corresponding list. It can also create new ones. To proceed with the creation of the intermediate dataset, the user clicks on the *New* button, and the view shown in Figure 18 appears.

630 Here the researcher can select the annual text files to be included in the intermediate dataset, by clicking on the *->* and *<-* buttons. In this case, all the files introduced before, which correspond to the buoy under study, are selected. When the file selection is finished, *Create* button has to be clicked in order to introduce the description and the file name of the current intermediate dataset,

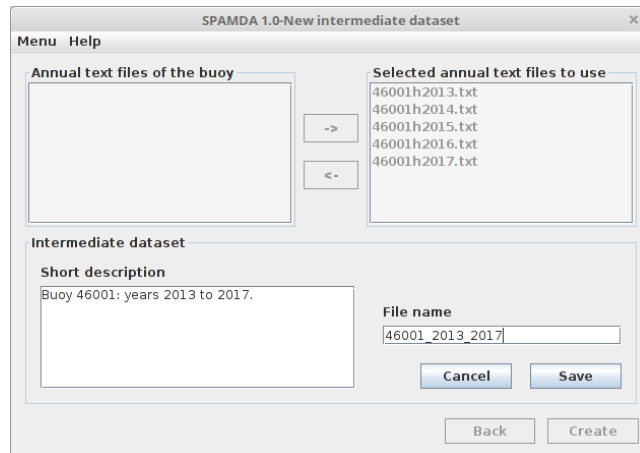


Figure 18: *New intermediate dataset* view: creating the intermediate dataset with 5 annual text files.

635 and then, with the *Save* button, the creation process starts, showing the status of the process during it. After that, in order to prepare the intermediate dataset, the dataset is selected (see Figure 17), and then the button *Open* is clicked to jump to the tab *Pre-process* (shown in Figure 19).

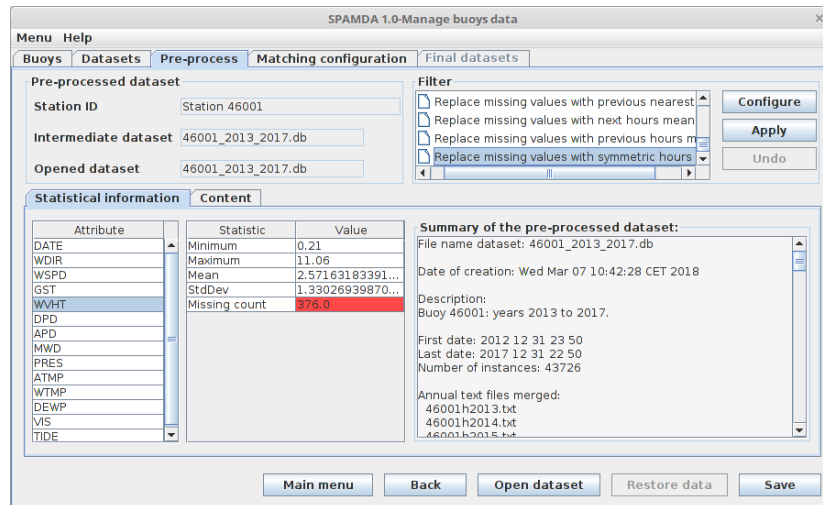


Figure 19: *Pre-process* tab: preprocessing the created intermediate dataset.

In *Pre-process* tab, relevant statistical information about the selected dataset

640 is shown, and also the content of the dataset can be consulted, providing the researcher the capacity to evaluate the pre-processing being performed. Here the researcher can apply (and configure) the necessary filters (explained in Section 3.3) to the selected dataset, and, in the bottom part, the main statistics of the dataset are displayed, which can be used to observe the changes produced
645 when applying a filter. As mentioned earlier, this case study is focused on classifying waves considering their height, so any missing data from wave height (376 values) and the remaining attributes are recovered, using the filter *Replace missing values with symmetric 3 hours mean*. Furthermore, the attributes MWD, DEWP, VIS and TIDE are removed from the dataset by applying the
650 filter *RemoveByName*, since the first two had more than 92% of missing data and the last two 100%. After finishing the pre-processing of the dataset, the researcher can click on the *Save* button, to introduce the description and file name for the current pre-processed dataset.

At this point, the researcher has registered the buoy in SPAMDA, then
655 entered its raw data and selected the required data for the problem (intermediate dataset). Finally, the data has been pre-processed in order to be ready for its future use in ML algorithms. In order to achieve a more accurate description of the problem under study, a matching process can be carried out to merge the processed data from NDBC with the reanalysis data (also entered previously)
660 from NNRP.

The next step is to click on the *Matching configuration* tab, to open the view shown in Figure 20. In this view, the researcher can customise (or load) the parameters of the matching process according to their needs and select the prediction task (described in Section 3.4) that the final dataset will be used for.
665 In this example, the following parameters were selected:

- Attribute to predict: WVHT.
- Reanalysis data: Air, pressure, u-wind and v-wind.
- Buoy attributes to be used as inputs: WDIR, WSPD, GST, DPD, APD, PRES, ATMP and WTMP (see Table 1).

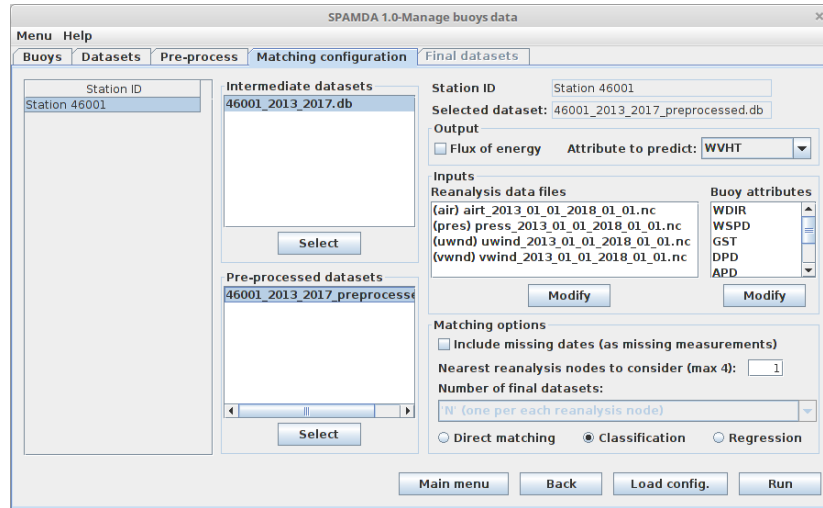


Figure 20: *Matching configuration* tab: parameters for the data integration of the intermediate dataset and the reanalysis files.

- Reanalysis nodes to consider: 1 (only the closest reanalysis node will be used).
- Number of final datasets: In this example that option is disabled, because only one reanalysis node is considered.
- Prediction task: Classification.

After configuring the matching process, the researcher can click on the *Run* button to jump to the view shown in Figure 21 and proceed to define the final dataset structure according to the selected prediction task. Given that, in the previous window, *Classification* was selected, the researcher can now add, modify or delete the thresholds (usually defined by an expert) for discretising the output variable. After this, the next step is to set the time horizon desired (6 hours by default) and also to activate (if desired) the synchronisation (in time) of reanalysis variables with the output, as explained in Section 3.5. Then the researcher can click on the *Update final dataset* button to see the content shown in the bottom left corner. Finally, after checking that everything is correct, the last step would be to select the name and path of the dataset file, and its output

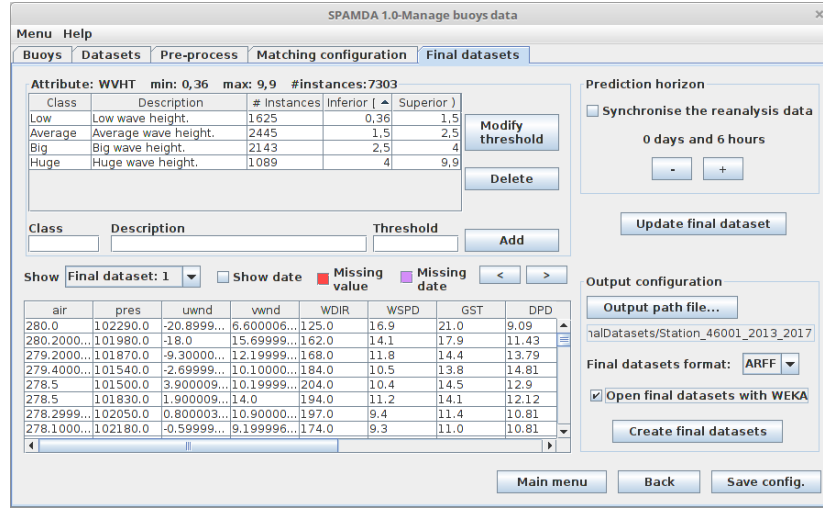


Figure 21: *Final datasets* tab: content of the final dataset created after data integration and discretisation of the output variable in 4 classes.

format (CSV or ARFF) and click on the *Create final datasets* button. For this case study, the following configuration was applied:

- Thresholds: see Table 2.
- Prediction horizon: 6 hours
- Synchronisation: Disabled

At this point, the final dataset would be created according to the tailored configuration and stored in the computer of the researcher, which already can apply the ML techniques to address the problem of wave classification. Concretely, the final dataset consists of 7302 instances and whose distribution is represented in Table 3.

4.2. Obtaining models with ML algorithms

Now, it will be described how to obtain wave classification models using the final dataset previously created with SPAMDA. The modelling will be performed using WEKA as ML tool, which can be opened through SPAMDA, as shown in

Table 3: Distribution of instances of the final dataset

Year	Number of instances
2013	1460
2014	1460
2015	1460
2016	1464
2017	1458
	7302

700 Fig. 22. Nevertheless, as mentioned above, the researcher can create the final dataset in CSV format in order to use other ML tools, such as KEEL, Python or R, among others.

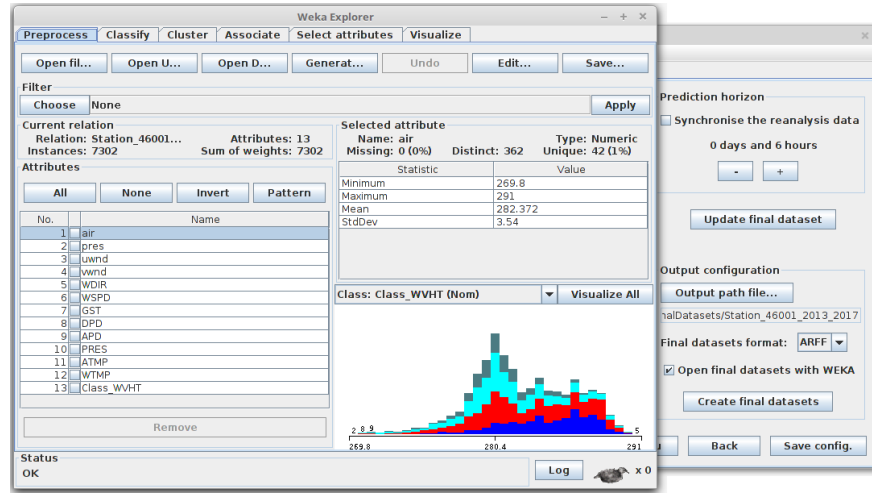


Figure 22: Final dataset opened with the environment Explorer of WEKA.

705 Since the final dataset is a time series of meteorological data (collected from 2013 to 2017), a hold-out scheme (60% train / 40% test) will be used. In this way, years from 2013 to 2015 will be used for the training phase (4380 instances) whereas 2016 and 2017 years will be used for the test phase (2922 instances). Previously to the learning phase, the attributes are normalised to

avoid that some attributes could be more important than others because their values could be on a larger scale.

710 The classification algorithms that will be considered for the wave modelling are Logistic Regression [49], C4.5 [50], Random Forest [51], Support Vector Machine [52] and Multilayer Perceptron [53], which will be applied with the default values of the parameters configured in WEKA. Given that Logistic Regression and C4.5 algorithms are deterministic, it is only necessary to launch one ex-
715 ecution for each one. However, Random Forest, Support Vector Machine and Multilayer Perceptron algorithms have a stochastic component, so in this case 30 executions for each one will be carried out. The results obtained are shown in Table 4.

Table 4: Results (mean \pm SD) obtained by the algorithms

Algorithm	Accuracy (CCR)	Kappa
Logistic Regression	59.0691	0.44447
C4.5	61.7385	0.47852
Random Forest	<i>68.6516 \pm 0.3083</i>	<i>0.57040 \pm 0.0042</i>
Support Vector Machine	61.0016 \pm 0.0522	0.46770 \pm 0.0007
Multilayer Perceptron	69.7045 \pm 1.3033	0.58576 \pm 0.0178

As can be seen, Random Forest and Multilayer Perceptron algorithms have
720 achieved similar accuracy, but the performance of the latter is slightly better.

Although it has been performed a first classification approach, to illustrate the use of datasets created with SPAMDA for environmental modelling employing ML algorithms, both models have obtained a good performance despite the problem tackled is to predict wave height six hours in advance.

725 4.3. Important remarks

In this section, it has been described how to use SPAMDA to create a final dataset with the aim of classifying waves. However, using the same data described in Section 4.1 the researcher can quickly address other objectives or

different studies by merely tailoring the matching configuration of the data integration process. For example, longer-term wave prediction can be addressed
730 by changing the time horizon, wave modelling can be approached from another perspective by creating the final dataset for regression, or environmental modelling can be focused in diverse fields by changing the output meteorological variable.

735 Furthermore, environmental modelling in other geographical location can be carried out by merely using other collected data.

As SPAMDA performs all data processing and management to create the datasets, it not only prevents the researchers from performing repetitive tasks but also prevents them from making possible errors. In this way, the researchers
740 can focus on the studies they are carrying out.

5. Conclusions

A software tool for creating datasets using meteorological data from NDBC and NNRP has been presented. These datasets will be ready to use as input for ML techniques in prediction tasks (classification or regression). As a result, the
745 researchers will benefit from significant support when carrying out environmental modelling related to energy, atmospheric or oceanic studies, among others. Moreover, given that SPAMDA simplifies all the intermediate steps involved in the creation of datasets (such as entering the meteorological information, managing with the incomplete data, pre-processing tasks, the customisable matching
750 process to merge the data and the preparation of the datasets according to the ML technique to use), it avoids errors and reduces the time needed. In this way, the researchers will be able to have more in-depth analysis, which could result in more complete conclusions about the issue under study.

In order to improve SPAMDA, some future work could be focused on new
755 functional modules for managing meteorological data of different formats [54], so that the developed tool can be extended to any other research, new pre-processing functionalities such as filters to analyse the correlation between at-

tributes or new functional modules for recovering missing values using nearby
buoys data [55]. Furthermore, the developed software could manage other
760 sources of reanalysis data (with different spatial and temporal resolution), and
new output formats for the datasets which could be used as input by other tools
for ML such as KEEL (*Knowledge Extraction based on Evolutionary Learning*)
[56]. However, such new functionalities can be developed with a reasonable ef-
fort to be able to manage each particular casuistry. For example, when dealing
765 with incomplete data, interpreting different data and files structures or carrying
out the matching process of two environmental data sources.

Acknowledgments

This work has been partially subsidised by the projects with references
TIN2017-85887-C2-1-P of the Spanish Ministry of Economy and Competitive-
770 ness (MINECO), UCO-1261651 of the “Consejería de Economía, Conocimiento,
Empresas y Universidad” of the “Junta de Andalucía” (Spain) and FEDER funds
of the European Union. We also thank to NVIDIA Corporation for the transfer
of computational resources for research works.

The authors also thank to NOAA/OAR/ESRL PSD, Boulder, Colorado,
775 USA for the NCEP Reanalysis data provided from their Web site at <https://www.esrl.noaa.gov/psd/>, to NOAA/NDBC by its data that were collected
and made freely available, to University of Waikato for the Weka (Waikato
Environment for Knowledge Analysis) software tool, to University Corporation
for Atmospheric Research/Unidata for the NetCDF (network Common Data
780 Form) Java library and to QOS.ch for the SLF4J (Simple Logging Facade for
Java) library.

Additional material

The source code and the software tool are available at <https://github.com/ayrna>.

785 References

- [1] M. S. Anis, B. Jamil, M. A. Ansari, E. Bellos, Generalized models for
estimation of global solar radiation based on sunshine duration and detailed
comparison with the existing: A case study for India, *Sustainable Energy*
Technologies and Assessments 31 (2019) 179–198. doi:10.1016/j.seta.
790 2018.12.009.
- [2] V. Laface, F. Arena, C. G. Soares, Directional analysis of sea storms, *Ocean*
Engineering 107 (Supplement C) (2015) 45–53. doi:10.1016/j.oceaneng.
2015.07.027.
- [3] O. Dahhani, A. El-Jouni, I. Boumhidi, Assessment and control of wind
795 turbine by support vector machines, *Sustainable Energy Technologies and*
Assessments 27 (2018) 167–179. doi:10.1016/j.seta.2018.04.006.
- [4] M. Dorado-Moreno, L. Cornejo-Bueno, P. Gutiérrez, L. Prieto, C. Hervás-
Martínez, S. Salcedo-Sanz, Robust estimation of wind power ramp events
with reservoir computing, *Renewable Energy* 111 (2017) 428–437. doi:
800 10.1016/j.renene.2017.04.016.
- [5] O. Reyes-Mendoza, O. Alvarez-Silva, X. Chiappa-Carrara, C. Enriquez,
Variability of the thermohaline structure of a coastal hypersaline lagoon
and the implications for salinity gradient energy harvesting, *Sustainable*
Energy Technologies and Assessments 38 (2020) 100645. doi:10.1016/j.
805 seta.2020.100645.
- [6] H. L. Fuchs, G. P. Gerbi, Seascape-level variation in turbulence- and
wave-generated hydrodynamic signals experienced by plankton, *Progress*
in Oceanography 141 (Supplement C) (2016) 109–129. doi:10.1016/j.
pcean.2015.12.010.
- [7] V. d. P. R. da Silva, R. A. e Silva, E. P. Cavalcanti, C. C. Braga, P. V.
810 de Azevedo, V. P. Singh, E. R. R. Pereira, Trends in solar radiation in

- NCEP/NCAR database and measurements in northeastern Brazil, *Solar Energy* 84 (10) (2010) 1852–1862. doi:10.1016/j.solener.2010.07.011.
- [8] B. Gouldby, F. J. Méndez, Y. Guanche, A. Rueda, R. Mínguez, A methodology for deriving extreme nearshore sea conditions for structural design and flood risk analysis, *Coastal Engineering* 88 (Supplement C) (2014) 15–26. doi:10.1016/j.coastaleng.2014.01.012.
- [9] C. E. C. Nogueira, M. L. Vidotto, F. Toniazzi, G. Debastiani, Software for designing solar water heating systems, *Renewable and Sustainable Energy Reviews* 58 (Supplement C) (2016) 361–375. doi:10.1016/j.rser.2015.12.346.
- [10] C. K. Lo, Y. S. Lim, F. A. Rahman, New integrated simulation tool for the optimum design of bifacial solar panel with reflectors on a specific site, *Renewable Energy* 81 (Supplement C) (2015) 293–307. doi:10.1016/j.renene.2015.03.047.
- [11] T. H. Nguyen, A. Prinz, T. Friisø, R. Nossun, I. Tyapin, A framework for data integration of offshore wind farms, *Renewable Energy* 60 (Supplement C) (2013) 150–161. doi:10.1016/j.renene.2013.05.002.
- [12] S. H. Shehadeh, A. Moh'd, H. H. Aly, M. El-Hawary, An intelligent load management application for solar boiler system, *Sustainable Energy Technologies and Assessments* 38 (2020) 100644. doi:10.1016/j.seta.2020.100644.
- [13] D. A. Garcia, D. Bruschi, A risk assessment tool for improving safety standards and emergency management in Italian onshore wind farms, *Sustainable Energy Technologies and Assessments* 18 (2016) 48–58. doi:10.1016/j.seta.2016.09.009.
- [14] A. L. A. Raabe, A. H. d. F. Klein, M. González, R. Medina, MEPBAY and SMC: Software tools to support different operational levels of headland-bay beach in coastal engineering projects, *Coastal Engineering* 57 (2) (2010)

- 840 213–226, hydrodynamics and Applications of Headland-Bay Beaches. doi:
10.1016/j.coastaleng.2009.10.008.
- [15] S. Motahhir, A. E. Hammoumi, A. E. Ghzizal, A. Derouich, Open hardware/software test bench for solar tracker with virtual instrumentation, Sustainable Energy Technologies and Assessments 31 (2019) 9–16. doi:
845 10.1016/j.seta.2018.11.003.
- [16] M. Zeyringer, B. Fais, I. Keppo, J. Price, The potential of marine energy technologies in the UK – Evaluation from a systems perspective, Renewable Energy 115 (Supplement C) (2018) 1281–1293. doi:10.1016/j.renene.
2017.07.092.
- 850 [17] M. Bhattacharya, S. A. Churchill, S. R. Paramati, The dynamic impact of renewable energy and institutions on economic output and CO2 emissions across regions, Renewable Energy 111 (Supplement C) (2017) 157–167. doi:10.1016/j.renene.2017.03.102.
- [18] M. Brede, B. J. de Vries, The energy transition in a climate-constrained
855 world: Regional vs. global optimization, Environmental Modelling & Software 44 (2013) 44–61, thematic Issue on Innovative Approaches to Global Change Modelling. doi:10.1016/j.envsoft.2012.07.011.
- [19] A. F. d. O. Falcão, Wave energy utilization: A review of the technologies, Renewable and Sustainable Energy Reviews 14 (3) (2010) 899–918. doi:
860 10.1016/j.rser.2009.11.003.
- [20] S. Oliveira-Pinto, P. Rosa-Santos, F. Taveira-Pinto, Electricity supply to offshore oil and gas platforms from renewable ocean wave energy: Overview and case study analysis, Energy Conversion and Management 186 (2019) 556–569. doi:10.1016/j.enconman.2019.02.050.
- 865 [21] L. F. Prieto, G. R. Rodríguez, J. S. Rodríguez, Wave energy to power a desalination plant in the north of Gran Canaria Island: Wave resource,

- socioeconomic and environmental assessment, *Journal of Environmental Management* 231 (2019) 546–551. doi:10.1016/j.jenvman.2018.10.071.
- [22] M. K. Ochi, *Ocean Waves: The Stochastic Approach*, Cambridge Ocean Technology Series, Cambridge University Press, 1998. doi:10.1017/CB09780511529559.
- [23] S. Crowley, R. Porter, D. J. Taunton, P. A. Wilson, Modelling of the WITT wave energy converter, *Renewable Energy* 115 (Supplement C) (2018) 159–174. doi:10.1016/j.renene.2017.08.004.
- [24] O. Abdelkhalik, R. Robinett, S. Zou, G. Bacelli, R. Coe, D. Bull, D. Wilson, U. Korde, On the control design of wave energy converters with wave prediction, *Journal of Ocean Engineering and Marine Energy* 2 (4) (2016) 473–483. doi:10.1007/s40722-016-0048-4.
- [25] J. V. Ringwood, G. Bacelli, F. Fusco, Energy-Maximizing Control of Wave-Energy Converters: The Development of Control System Technology to Optimize Their Operation, *IEEE Control Systems* 34 (5) (2014) 30–55. doi:10.1109/MCS.2014.2333253.
- [26] K. Chatziioannou, V. Katsardi, A. Koukouselis, E. Mistakidis, The effect of nonlinear wave-structure and soil-structure interactions in the design of an offshore structure, *Marine Structures* 52 (Supplement C) (2017) 126–152. doi:10.1016/j.marstruc.2016.11.003.
- [27] Y. Dalgic, I. Lazakis, I. Dinwoodie, D. McMillan, M. Revie, Advanced logistics planning for offshore wind farm operation and maintenance activities, *Ocean Engineering* 101 (Supplement C) (2015) 211–226. doi:10.1016/j.oceaneng.2015.04.040.
- [28] D. P. Callaghan, T. E. Baldock, B. Shabani, P. J. Mumby, Communicating physics-based wave model predictions of coral reefs using Bayesian belief networks, *Environmental Modelling & Software* 108 (2018) 123–132. doi:10.1016/j.envsoft.2018.07.021.

- 895 [29] E. Alpaydin, Introduction to Machine Learning (Adaptive Computation and Machine Learning), The MIT Press, 2004.
- [30] C. M. Bishop, Pattern Recognition and Machine Learning (Information Science and Statistics), Springer-Verlag New York, Inc., Secaucus, NJ, USA, 2006.
- 900 [31] S. Delfani, M. Esmaili, M. Karami, Application of artificial neural network for performance prediction of a nanofluid-based direct absorption solar collector, Sustainable Energy Technologies and Assessments 36 (2019) 100559. doi:10.1016/j.seta.2019.100559.
- [32] Nasruddin, Sholahudin, P. Satrio, T. M. I. Mahlia, N. Giannetti, K. Saito, 905 Optimization of HVAC system energy consumption in a building using artificial neural network and multi-objective genetic algorithm, Sustainable Energy Technologies and Assessments 35 (2019) 48–57. doi:10.1016/j.seta.2019.06.002.
- [33] Y. Guo, J. Wang, H. Chen, G. Li, J. Liu, C. Xu, R. Huang, Y. Huang, 910 Machine learning-based thermal response time ahead energy demand prediction for building heating systems, Applied Energy 221 (2018) 16–27. doi:10.1016/j.apenergy.2018.03.125.
- [34] M. A. H. Eibe Frank, I. H. Witten, The WEKA Workbench. Online Appendix for Data Mining: Practical Machine Learning Tools and Techniques 915 (2016).
- [35] A. M. Durán-Rosal, J. C. Fernández, P. A. Gutiérrez, C. Hervás-Martínez, Detection and prediction of segments containing extreme significant wave heights, Ocean Engineering 142 (Supplement C) (2017) 268–279. doi:10.1016/j.oceaneng.2017.07.009.
- 920 [36] N. K. kumar, R. Savitha, A. A. Mamun, Regional ocean wave height prediction using sequential learning neural networks, Ocean Engineering 129 (2017) 605–612. doi:10.1016/j.oceaneng.2016.10.033.

- [37] L. Johansson, V. Epitropou, K. Karatzas, A. Karppinen, L. Wanner, S. Vrochidis, A. Bassoukos, J. Kukkonen, I. Kompatsiaris, Fusion of meteorological and air quality data extracted from the web for personalized environmental information services, *Environmental Modelling & Software* 64 (2015) 143–155. doi:10.1016/j.envsoft.2014.11.021.
- [38] J. C. Fernández, S. Salcedo-Sanz, P. A. Gutiérrez, E. Alexandre, C. Hervás-Martínez, Significant wave height and energy flux range forecast with machine learning classifiers, *Engineering Applications of Artificial Intelligence* 43 (Supplement C) (2015) 44–53. doi:10.1016/j.engappai.2015.03.012.
- [39] J. Adams, S. Flora, Correlating seabird movements with ocean winds: linking satellite telemetry with ocean scatterometry, *Marine Biology* 157 (4) (2010) 915–929. doi:10.1007/s00227-009-1367-y.
- [40] National Data Buoy Center, National Oceanic and Atmospheric Administration of the USA (NOAA), <http://www.ndbc.noaa.gov/>, (Accessed 19 November 2018).
- [41] E. Kalnay, M. Kanamitsu, R. Kistler, W. Collins, D. Deaven, L. Gandin, M. Iredell, S. Saha, G. White, J. Woollen, Y. Zhu, A. Leetmaa, R. Reynolds, M. Chelliah, W. Ebisuzaki, W. Higgins, J. Janowiak, K. C. Mo, C. Ropelewski, J. Wang, R. Jenne, D. Joseph, The NCEP/NCAR 40-Year Reanalysis Project, *Bulletin of the American Meteorological Society* 77 (3) (1996) 437–471. doi:10.1175/1520-0477(1996)077<0437:TNYRP>2.0.CO;2.
- [42] R. Kistler, W. Collins, S. Saha, G. White, J. Woollen, E. Kalnay, M. Chelliah, W. Ebisuzaki, M. Kanamitsu, V. Kousky, H. van den Dool, R. Jenne, M. Fiorino, The NCEP–NCAR 50–Year Reanalysis: Monthly Means CD–ROM and Documentation, *Bulletin of the American Meteorological Society* 82 (2) (2001) 247–267. doi:10.1175/1520-0477(2001)082<0247:TNNYRM>2.3.CO;2.

- [43] The WEKA Data Mining Software: Attribute-Relation File Format (ARFF), <https://www.cs.waikato.ac.nz/ml/weka/arff.html>, (Accessed 18 December 2018).
- 955 [44] National Data Buoy Center, NDBC - Historical NDBC Data, http://www.ndbc.noaa.gov/historical_data.shtml, (Accessed 15 January 2019).
- [45] National Data Buoy Center, NDBC - Important NDBC Web Site Changes, <http://www.ndbc.noaa.gov/mods.shtml>, (Accessed 15 January 2019).
- 960 [46] NOAA/OAR/ESRL PSD, ESRL : PSD : NCEP/NCAR Reanalysis 1, <https://www.esrl.noaa.gov/psd/data/gridded/data.ncep.reanalysis.html>, (Accessed 15 January 2019).
- [47] Unidata, Network Common Data Form (NetCDF) version 4.6.10 [software]. Boulder, CO: UCAR/Unidata., <https://doi.org/10.5065/D6H70CW6> (2017).
- 965 [48] M. J. de Smith, M. F. Goodchild, P. A. Longley, Geospatial Analysis: A Comprehensive Guide to Principles, Techniques and Software Tools, 3rd Edition, Matador, 2009.
- [49] D. W. Hosmer Jr, S. Lemeshow, R. X. Sturdivant, Applied logistic regression, Vol. 398, John Wiley & Sons, 2013.
- 970 [50] J. R. Quinlan, C4. 5: programs for machine learning, Elsevier, 2014.
- [51] L. Breiman, Random forests, Machine learning 45 (1) (2001) 5–32.
- [52] C. Cortes, V. Vapnik, Support-vector networks, Machine learning 20 (3) (1995) 273–297.
- [53] S. Haykin, Neural networks: a comprehensive foundation, Prentice Hall PTR, 1994.
- 975 [54] National Data Buoy Center, NDBC - Measurement Descriptions and Units, <https://www.ndbc.noaa.gov/measdes.shtml>, (Accessed 15 January 2019).

- [55] A. M. Durán-Rosal, C. Hervás-Martínez, A. J. Tallón-Ballesteros, A. C. Martínez-Estudillo, S. Salcedo-Sanz, Massive missing data reconstruction in ocean buoys with evolutionary product unit neural networks, *Ocean Engineering* 117 (2016) 292–301, jCR(2016): 1.894 Position: 2/14 (Q1) Category: ENGINEERING, MARINE. doi:10.1016/j.oceaneng.2016.03.053.
- [56] J. Alcalá-Fdez, L. Sánchez, S. García, M. J. del Jesús, S. Ventura, J. M. G. i Guiu, J. M. Otero, C. Romero, J. Bacardit, V. M. R. Santos, J. C. Fernández, F. Herrera, KEEL: a software tool to assess evolutionary algorithms for data mining problems, *Soft Comput.* 13 (2009) 307–318. doi:10.1007/s00500-008-0323-y.

Appendix A. Managing incomplete data

In this appendix, we describe how SPAMDA deals with incomplete data when creating intermediate datasets and performing the matching process.

The measurements collected by the buoys may be incomplete or recorded at a different time than the expected one, due to the weather conditions in which the buoys have to operate. To illustrate this casuistry, the following examples are shown in Fig. 23:

- In the instance marked with a), the measurement of 17:50 was collected at 17:45, 5 minutes earlier.
- In the instance marked with b), the measurement of 23:50 was collected at 23:30, 20 minutes earlier.
- In the instance marked with c), the measurement of 05:50 is duplicated.
- In the instance marked with d), the measurement of 11:50 is missing (missing date or instance).
- In the instance marked with e), the measurement of 17:50 and 18:50 are missing (missing dates or instances).

- Missing values highlighted in red colour.

	#YY	MM	DD	hh	mm	WDIR	WSPD	GST	WVHT	DPD	APD	MWD	PRES	ATMP	WTMP	DEWP	VIS	TIDE
	#yr	mo	dy	hr	mn	degT	m/s	m/s	m	sec	sec	degT	hPa	degC	degC	degC	mi	ft
	2016	12	31	23	50	279	6.4	7.3	2.41	12.90	6.50	999	1041.3	5.6	6.4	999.0	99.0	99.00
	2017	01	01	00	50	291	6.3	7.3	2.13	7.14	6.08	999	1041.1	5.5	6.4	999.0	99.0	99.00

a) ->	2017	01	04	16	50	308	5.5	6.7	1.28	10.00	5.96	999	1037.2	3.8	6.4	999.0	99.0	99.00
	2017	01	04	17	45	297	4.5	5.5	1.24	10.00	5.62	999	1037.3	5.3	6.3	999.0	99.0	99.00
	2017	01	04	18	50	318	5.8	7.1	1.37	10.00	6.04	999	1037.7	5.6	6.3	999.0	99.0	99.00

b) ->	2017	01	04	22	50	329	5.3	6.4	1.16	8.33	5.22	999	1037.0	6.0	6.4	999.0	99.0	99.00
	2017	01	04	23	30	327	5.1	6.2	0.85	5.00	4.13	999	1036.8	5.9	6.4	999.0	99.0	99.00
	2017	01	05	00	50	334	5.6	6.6	1.07	10.81	4.73	999	1036.8	6.0	6.4	999.0	99.0	99.00

	2017	01	05	04	50	321	6.1	7.1	1.33	7.14	5.04	999	1036.6	5.8	6.4	999.0	99.0	99.00
c) ->	2017	01	05	05	50	308	6.9	8.0	1.66	7.69	5.47	999	1036.5	5.9	6.4	999.0	99.0	99.00
	2017	01	05	05	50	308	6.9	8.0	1.66	7.69	5.47	999	1036.5	5.9	6.4	999.0	99.0	99.00

d) ->	2017	01	05	10	50	329	10.5	13.1	2.55	8.33	5.44	999	1036.0	5.8	6.3	999.0	99.0	99.00
	2017	01	05	11	50	(missing date)												
	2017	01	05	12	50	337	11.3	14.1	2.77	7.69	5.69	999	1035.8	5.7	6.3	999.0	99.0	99.00

	2017	01	05	15	50	344	12.3	14.3	3.07	9.09	5.99	999	1034.9	5.7	6.3	999.0	99.0	99.00
e) ->	2017	01	05	16	50	345	11.4	14.6	3.16	10.00	6.27	999	1034.9	5.7	6.3	999.0	99.0	99.00
	2017	01	05	17	50	(missing date)												
	2017	01	05	18	50	(missing date)												
	2017	01	05	19	50	331	11.5	14.2	2.98	9.09	5.84	999	1034.9	5.5	6.3	999.0	99.0	99.00

	2017	12	31	17	50	999	5.3	7.4	5.52	11.43	9.04	182	1002.4	5.0	4.9	999.0	99.0	99.00
	2017	12	31	18	50	999	2.8	4.6	5.00	11.43	8.82	179	1002.0	4.8	4.9	999.0	99.0	99.00
	2017	12	31	19	50	999	3.4	5.0	4.87	12.12	8.63	200	1001.6	5.0	4.9	999.0	99.0	99.00
	2017	12	31	20	50	999	3.0	4.4	4.98	12.90	8.57	201	1000.6	4.8	4.9	999.0	99.0	99.00
	2017	12	31	21	50	999	3.8	6.3	4.64	10.00	8.55	150	1000.1	4.8	4.9	999.0	99.0	99.00
	2017	12	31	22	50	999	3.4	5.2	4.40	12.90	8.40	200	998.9	4.7	4.9	999.0	99.0	99.00

Figure 23: A fragment of an annual text file with different missing value examples.

SPAMDA has been designed to tackle these situations, and it informs the researchers of any incidence found while reading the annual text files for creating the intermediate datasets. For the case of measurements that were recorded at a different time than expected, it has been established a time gap of 6 minutes (10% of an hour). Therefore, if the time difference exceeds such value the date will be considered as an unexpected.

Fig. 24 shows the status of the creation of an intermediate dataset with the information of Fig 23. Note that the instance marked with a) has not been informed by SPAMDA as an unexpected date because its time difference is less than 6 minutes. Depending on the affected attribute, NDBC uses a specific value [54] to indicate the presence of lost data (e.g. 99 for VIS and TIDE attributes, 999 for DEWP, MWD and WDIR, etc.). SPAMDA interprets these specific

values and, after creating the intermediate dataset, the researchers can check if
 1020 it contains missing values by visualising its statistical information or content.
 Remember that SPAMDA provides several filters for recovering missing data,
 which were described in subsection 3.2.

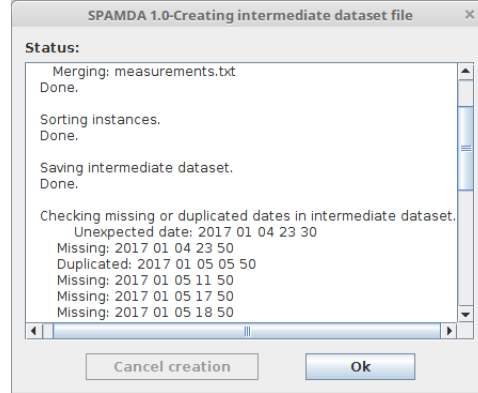


Figure 24: Status of the creation of the intermediate dataset for the example of Fig 23.

SPAMDA takes into account this casuistry when carrying out the matching
 process. An example is given in Fig. 25. As above-mentioned, the matching
 1025 process is performed with the nearest measurement (previous or next) within
 a maximum of 60 minutes of difference. However, in the instance marked with
e), given that the measurements dates 01/05/2017 17:50 and 01/05/2017 18:50
 are missing, the reanalysis date 01/05/2017 18:00 cannot be matched with buoy
 data (this date is highlighted in mauve colour in the Figure). Depending on
 1030 the selection made by the researchers in the parameter *Include missing dates*,
 this instance will be included in the final dataset (with missing values for buoy
 variables) or not.

	#YY	MM	DD	hh	mm	WDIR	WSPD	GST	WVHT	DPD	APD	MWD	PRES	ATMP	WTMP	DEWP	VIS	TIDE
	#yr	mo	dy	hr	mn	degT	m/s	m/s	m	sec	sec	degT	hPa	degC	degC	degC	mi	ft
	2016	12	31	23	50	279	6.4	7.3	2.41	12.90	6.50	999	1041.3	5.6	6.4	999.0	99.0	99.00
	2017	01	01	00	50	291	6.3	7.3	2.13	7.14	6.08	999	1041.1	5.5	6.4	999.0	99.0	99.00

a) ->	2017	01	04	16	50	308	5.5	6.7	1.28	10.00	5.96	999	1037.2	3.8	6.4	999.0	99.0	99.00
	2017	01	04	17	45	297	4.5	5.5	1.24	10.00	5.62	999	1037.3	5.3	6.3	999.0	99.0	99.00
	2017	01	04	18	50	318	5.8	7.1	1.37	10.00	6.04	999	1037.7	5.6	6.3	999.0	99.0	99.00

b) ->	2017	01	04	22	50	329	5.3	6.4	1.16	8.33	5.22	999	1037.0	6.0	6.4	999.0	99.0	99.00
	2017	01	04	23	30	327	5.1	6.2	0.85	5.00	4.13	999	1036.8	5.9	6.4	999.0	99.0	99.00
	2017	01	05	00	50	334	5.6	6.6	1.07	10.81	4.73	999	1036.8	6.0	6.4	999.0	99.0	99.00

	2017	01	05	04	50	321	6.1	7.1	1.33	7.14	5.04	999	1036.6	5.8	6.4	999.0	99.0	99.00
	2017	01	05	05	50	308	6.9	8.0	1.66	7.69	5.47	999	1036.5	5.9	6.4	999.0	99.0	99.00
c) ->	2017	01	05	05	50	308	6.9	8.0	1.66	7.69	5.47	999	1036.5	5.9	6.4	999.0	99.0	99.00

	2017	01	05	10	50	329	10.5	13.1	2.55	8.33	5.44	999	1036.0	5.8	6.3	999.0	99.0	99.00
d) ->	2017	01	05	11	50

	2017	01	05	12	50	337	11.3	14.1	2.77	7.69	5.69	999	1035.8	5.7	6.3	999.0	99.0	99.00

	2017	01	05	15	50	344	12.3	14.3	3.07	9.09	5.99	999	1034.9	5.7	6.3	999.0	99.0	99.00
	2017	01	05	16	50	345	11.4	14.6	3.16	10.00	6.27	999	1034.9	5.7	6.3	999.0	99.0	99.00
e) ->	2017	01	05	17	50
	2017	01	05	18	50
	2017	01	05	19	50	331	11.5	14.2	2.98	9.09	5.84	999	1034.9	5.5	6.3	999.0	99.0	99.00

	2017	12	31	17	50	999	5.3	7.4	5.52	11.43	9.04	182	1002.4	5.0	4.9	999.0	99.0	99.00
	2017	12	31	18	50	999	2.8	4.6	5.00	11.43	8.82	179	1002.0	4.8	4.9	999.0	99.0	99.00
	2017	12	31	19	50	999	3.4	5.0	4.87	12.12	8.63	200	1001.6	5.0	4.9	999.0	99.0	99.00
	2017	12	31	20	50	999	3.0	4.4	4.98	12.90	8.57	201	1000.6	4.8	4.9	999.0	99.0	99.00
	2017	12	31	21	50	999	3.8	6.3	4.64	10.00	8.55	150	1000.1	4.8	4.9	999.0	99.0	99.00
	2017	12	31	22	50	999	3.4	5.2	4.40	12.90	8.40	200	998.9	4.7	4.9	999.0	99.0	99.00

	57.5 N	55.0 N
	147.5 W	147.5 W
Date	Pres	Pres
2017 01 01 00 00	106400	103300
.	.	.
.	.	.
2017 01 04 18 00	105900	102820
2017 01 05 00 00	105900	102740
2017 01 05 06 00	105810	102750
2017 01 05 12 00	105760	102680
2017 01 05 18 00	105810	102570
.	.(missing date)	.
.	.	.
2017 12 31 18 00	102660	99400

Figure 25: Matching the measurements (left) and the reanalysis data (right).