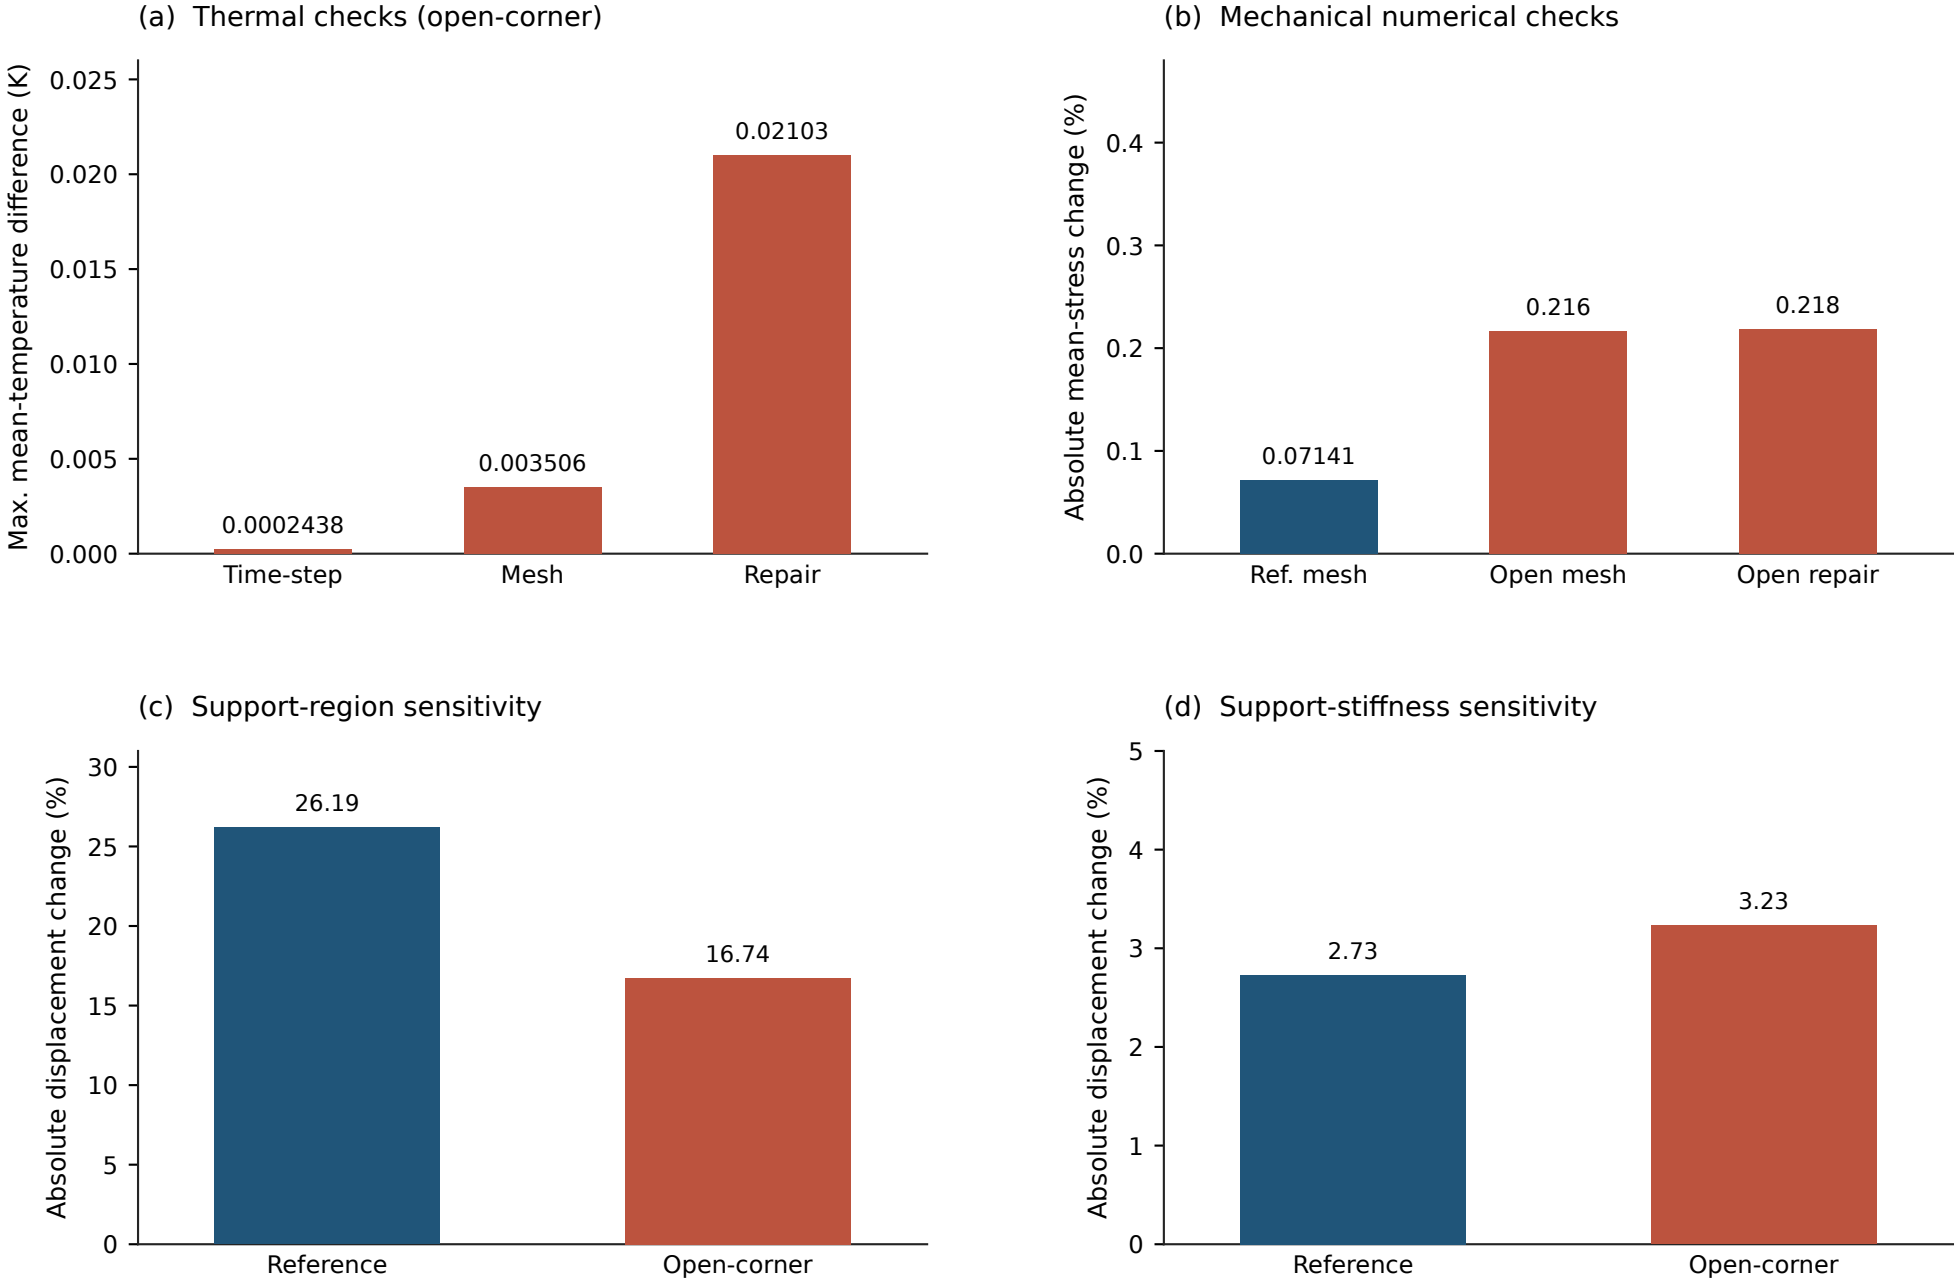
(a) Thermal checks (open-corner)
Max. mean-temperature difference (K)
0.025
0.020
0.015
0.010
0.005
0.000
0.0002438
0.003506
0.02103
Time-step
Mesh
Repair
(b) Mechanical numerical checks
Absolute mean-stress change (%)
0.4
0.3
0.2
0.1
0.0
0.07141
0.216
0.218
Ref. mesh
Open mesh
Open repair
(c) Support-region sensitivity
Absolute displacement change (%)
30
25
20
15
10
5
0
26.19
16.74
Reference
Open-corner
(d) Support-stiffness sensitivity
Absolute displacement change (%)
5
4
3
2
1
0
2.73
3.23
Reference
Open-corner