



BARLAS
Trailer

2026

TRAILERS · TANKERS · SPECIAL BODIES

PRODUCT CATALOG

From ADR-compliant tankers to silo trailers, tippers, lowbeds and special bodies — the full inventory of engineering-driven manufacturing.



11

CATEGORIES

76

PRODUCTS

136

MODELS

40+

EXPORT COUNTRIES

Engineering-driven manufacturing for every field of industrial transport.

At our modern production facility we design and build tankers, silo trailers, lowbeds and special bodies to ADR and international safety standards. Every vehicle is built with engineering precision for a long service life.

ADR-Certified Production

ISO 9001 Quality

TSE Certified

Manufacturing Since 1988

Full Warranty & Service

How to read this catalog

- Products are numbered **1.1 through 11.x** under **11 categories**; use the contents section to navigate by number.
- Each product page shows a photo, the available models and the technical specifications of the base model.
- For products with multiple models, specifications refer to the **base model**; please contact our sales team for the other models.
- All production is tailored to the order configuration — dimensions and equipment can be revised to your needs.

PHONE

0 552 500 20 00

E-MAIL

info@barlastrailer.com

ADDRESS

Fevziçakmak Mah. Şehit Hamdi
Karagöz Cad. No: 4s Karatay / Konya,
Türkiye

Contents

01 Tankers

- 1.1 Petroleum / Fuel Tanker
- 1.2 Asphalt / Bitumen Tanker
- 1.3 Steel Tanker
- 1.4 Gooseneck Tanker
- 1.5 Elliptical Tanker
- 1.6 Food Tanker
- 1.7 Insulated Tanker
- 1.8 Chemical Tanker
- 1.9 Conical Tanker
- 1.10 Stainless Steel Acid Tanker
- 1.11 Stainless Steel Insulated Tanker
- 1.12 LPG Tanker
- 1.13 Stainless Steel Tanker - Hazardous Goods
- 1.14 Stainless Steel Tanker - Non-Hazardous Goods
- 1.16 Cylindrical Tanker
- 1.17 Water Tanker
- 1.18 Milk Tanker Chassis
- 1.19 Vacuum Tanker

02 Silo Trailers

- 2.1 Tipping Silo Trailer
- 2.3 Liquid Fertiliser Silo Trailer
- 2.4 Flour and Food Silo Trailer
- 2.5 V-Type Wheat Silo Trailer
- 2.6 V-Type Silo Trailer
- 2.7 V-Type Flour and Food Silo Trailer
- 2.8 Vacuum Silo Trailer
- 2.9 W-Type (Millennium) Silo Trailer
- 2.10 Feed Silo Trailer

03 Tippers

- 3.1 Accordion Grain-Type Tipper
- 3.3 Half-Pipe / Tub Tipper
- 3.5 Truck-Mounted Tipper
- 3.6 Tipper with Side/Tail Boards
- 3.7 Rock-Type Tipper
- 3.8 Multi-System Tipper
- 3.9 Panel-Type Tipper
- 3.10 Side-Tipping Tipper
- 3.11 Half-Pipe Tipper

04 Curtainsiders & Tarpaulin Trailers

- 4.1 Multi Ride
- 4.2 Curtainsider Swap Body
- 4.3 Curtainsider & Tarpaulin
- 4.5 Light Tarpaulin
- 4.6 Standard Tarpaulin

05 Refrigerated Trailers

- 5.1 Refrigerated Trailer

06 Dry Freight & Box Bodies

- 6.1 Closed Box Steel Cargo Carrier
- 6.2 Dry Freight - Steel Box Body
- 6.4 Dry Freight Aluminium Dropside
- 6.5 Dry Freight Light Dropside
- 6.6 Dry Freight Coil Carrier

07 Container Carriers

- 7.1 Tipping Container Carrier
- 7.2 High Cube Container Carrier
- 7.3 Container Carrier
- 7.4 In-Port (Terminal) Container Carrier
- 7.5 Fixed Container Carrier
- 7.6 Standard Container Carrier
- 7.7 Telescopic Container Carrier

08 Lowbed & Heavy Haul

8.1	Well-Type Lowbed
8.2	Hydraulically Steered Lowbed
8.5	Front-Loading Lowbed
8.6	Fixed Lowbed
8.7	Standard-Axle Lowbed
8.8	Extendable Lowbed
8.9	Side-Extendable Extendable Lowbed

09 Platform / Flatbed

9.3	Coil Carrier Flatbed
9.4	Standard Flatbed

10 Drawbar Trailers

10.1	Axled Drawbar Trailer
10.2	Axled Truck Carrier
10.3	Agricultural Drawbar Trailer / Semi-Trailer

11 Other Special Products

11.1	Water/Fire Tender Truck
11.2	Livestock Carrier
11.4	Refuse Collection
11.6	Bulk Feed Carrier
11.7	Double Deck Standard
11.8	Intermodal Box
11.9	Log/Timber Transport
11.10	Concrete Mixer
11.11	Car Carrier Trailer
11.14	Textile Box

01 Tankers

From fuel to foodstuffs, chemicals to LPG: ADR-compliant tankers with aluminium, steel and stainless steel bodies.

18 PRODUCTS · 34 MODELS



1.1 Petroleum / Fuel Tanker

1.2 Asphalt / Bitumen Tanker

1.3 Steel Tanker

1.4 Gooseneck Tanker

1.5 Elliptical Tanker

1.6 Food Tanker

1.7 Insulated Tanker

1.8 Chemical Tanker

1.9 Conical Tanker

1.10 Stainless Steel Acid Tanker

1.11 Stainless Steel Insulated Tanker

1.12 LPG Tanker

1.13 Stainless Steel Tanker - Hazardous Goods

1.14 Stainless Steel Tanker - Non-Hazardous Goods

1.16 Cylindrical Tanker

1.17 Water Tanker

1.18 Milk Tanker Chassis

1.19 Vacuum Tanker

Petroleum / Fuel Tanker



MODELS (5)

ADR Aluminium Fuel Tanker

Fuel Tanker

ADR Aluminium Petroleum Tanker

Steel Petroleum Tanker

Petroleum Tanker

Technical specifications below refer to the **ADR Aluminium Fuel Tanker** model; please request a quote for the other models.

TANK

- Manufactured with a bottle-type shell structure compliant with the EN 13094 standard, using a robotic-welding production system.
- Tank code: LGBF

CHASSIS

- Verified through FEA analysis and calculations performed in accordance with the vehicle superstructure.
- High-strength aluminium alloy material is used for the chassis flange plate.

KING PIN

- The 2" king pin complies with SAE / DIN norms and is made of forged steel (42Cr Mo4) highly resistant to tensile failure; thanks to its bolted connections it can be replaced easily.

LANDING LEGS

- Two-speed mechanical landing leg system; 25 ton lifting and 50 ton payload capacity.

LIGHTING SYSTEM

- The vehicle features an electrical system compliant with ADR regulations.
- The valve cabinet houses 1 ex-proof push-button type lighting system.

EQUIPMENT

- Vehicle equipment complies with ADR norms.
- Manhole neck, breather valve, API coupling, footvalve, vapour adaptor, pneumatic control block.
- Manhole cover fitted with overfill sensor, vapour recovery valve and pressure relief valve.

WALKWAY

- Single-sided anti-slip walkway running along the right side of the tanker.
- Bolted ladder mounted at the right rear of the vehicle, providing access to the top of the tank shell.
- Handrail system pneumatically operated from ground level.
- Drain pipes at the rear of the spill trough discharge rainwater and product resulting from overfilling.

AXLE AND SUSPENSION SYSTEM

- Disc-braked axles with 3x9 ton payload capacity.
- Air suspension system.
- EBS brake system designed according to European standards.

STANDARD ACCESSORIES

- Single spare wheel bay protected by aluminium panels, with spare wheel carrier.
- 1 toolbox.
- The vehicle features 2 fire extinguisher cabinets.
- 1 traffic cone.
- 1 plastic water tank.
- 1 wheel chock.

- Separate mudguard for each tyre.
- Aluminium ladder.
- 4 m discharge hose with its housing.
- The vehicle features warning and marking plates.

TYRES

- 385/65 R22,5, 6 pieces

RIMS

- 6 aluminium rims, size 11,75 x 22,5

OPTIONS

- Capacity
- Colour and logo
- Pump / Meter
- Axle
- Spare tyre

PAINT

- The vehicle is cleaned with water and chemical mixtures; after a double primer coat, it is oven-painted in the requested RAL colour code.

Asphalt / Bitumen Tanker



MODELS (3)

Insulated Asphalt-Bitumen Tanker

Bitumen Tanker Semi-Trailer

Bitumen Tanker

Technical specifications below refer to the **Insulated Asphalt-Bitumen Tanker** model; please request a quote for the other models.

TANK

- Manufactured with a monoblock shell structure compliant with the EC standard, using a double-sided welding production system.
- Steel sheet with a minimum thickness of 4 mm is used in shell fabrication.
- Construction Material Series : Carbon or Stainless Steel *
- Products Carried : UN 3256, UN 3257 (Bitumen, No. 6 Fuel Oil, etc.)
- Operating Temperature : -20 °C / +250 °C
- Varies according to the selected product type and optional equipment.

CHASSIS

- Verified through FEA analysis and calculations performed in accordance with the vehicle superstructure.
- High-strength steel material is used for the chassis flange plate.
- Custom-designed half chassis matched to the shell design, providing rollover safety; shell bracket connections are bolted to the chassis.
- Chassis construction parts are manufactured with perfect fit.
- Production is carried out by welders certified under the ISO 3834 welded fabrication quality approval, using synergic welding machines.

KING PIN

- The 2" king pin complies with SAE / DIN norms and is made of forged steel (42Cr Mo4) highly resistant to tensile failure; thanks to its bolted connections it can be replaced easily.

LANDING LEGS

- Two-speed mechanical landing leg system; 25 ton lifting and 50 ton payload capacity.

LIGHTING SYSTEM

- Electrical system compliant with ADR regulations, and 1 ex-proof push-button type lighting system in the valve cabinet (optional).

EQUIPMENT

- Vehicle equipment compliant with ADR norms (optional).
- Manhole neck, breather valve, API coupling, footvalve, vapour adaptor, pneumatic control block (optional).

WALKWAY

- Single-sided anti-slip walkway running along the right side of the tanker.
- Bolted ladder mounted at the right rear of the vehicle, providing access to the top of the tank shell.
- Handrail system pneumatically operated from ground level.
- Drain pipes at the rear of the spill trough discharge rainwater and product resulting from overfilling.

AXLE AND SUSPENSION SYSTEM

- Disc-braked axles with 3x9 ton payload capacity.
- Air suspension system.
- EBS brake system designed according to European standards.

DISCHARGE SYSTEM

- Tanker discharge valves are 3" ball type and insulated with glass wool.

STANDARD ACCESSORIES

- Spare wheel bay and jack-operated spare wheel carrier.
- 1 toolbox.
- The vehicle features 2 fire extinguisher cabinets.
- 1 plastic water tank.
- 1 wheel chock.
- Separate mudguard for each tyre.
- Rear ladder.
- 4 m discharge hose with its housing.
- The vehicle features warning and marking plates.

TYRES

- 385/65 R22,5, 6+1 pieces

RIMS

- 6+1 pieces, size 11,75 x 22,5

OPTIONS

- Capacity
- Colour and logo
- Pump / Meter
- Axle
- Spare tyre
- Discharge system
- Heating system available (electric-diesel)

PAINT

- Cleaned with water and chemical mixtures, the vehicle can be oven-painted in the requested RAL colour code after 2 primer coats.

DIMENSIONS

- Width : max. 2.550 mm.
- Height : max. 4.000 mm. *
- Axle Spacing Range : 1.300 ~ 1.400 mm. *
- King-Pin Height : 1.250 ~ 1.500 mm. *
- Tare Weight : 7.000 ~ 10.000 kg. *

CAPACITY

- Geometric Volume : 21.000 ~ 40.000 l. *
- Number of Compartments : 1 *

TANK SHELL

- Cylindrical cross-section design compliant with the EN 13094 design standard.
- 1 external dished end at the front and 1 at the rear; surge baffles inside the tank compliant with the EN 13094 design standard.
- Holds ISO 3834 welded fabrication quality approval.
- Unique in the tanker manufacturing industry: a safe, smooth and even-surfaced shell built from transversely seamless one-piece plates in the cylindrical shell structure, joined using the longest weld seam technology with the minimum number of joint (T) points.
- Continuous, high-performance robotic welding technology minimises stress effects on the shell and human-induced welding defects, making the shell safe against impacts and collisions.
- The slope built into the chassis design allows complete discharge with no liquid remaining inside the tank.
- Safety against expansion and overflow is provided by an air gap.

INSULATION

- The tank shell is clad with rock wool, providing full thermal insulation and preserving product temperature and fluidity for extended periods.
- Insulation cladding wraps the shell circumferentially to prevent sagging, protects against external effects, is sealed at the joints with battens and heat-resistant rubber, and gives a refined appearance; front/rear insulation dished ends are included.

FILLING LINE

- Top filling is performed via a manhole cover with DN 500 filling port.

DISCHARGE LINE

- Free gravity discharge or pump-driven pressurised discharge via EN 13094-compliant insulated discharge piping located at the rear of the tank, running from the optional footvalve — manually opened and closed by a heat-resistant handwheel — to the safety-providing 3-speed shut-off coupling, sloped so no liquid remains in the line after discharge.
- A drained drip cup at the outlet end of the shut-off coupling collects liquid runs occurring after discharge.
- Discharge pipes are welded to imported patented elbows under ISO 3834 welded fabrication quality approval.

CHASSIS EQUIPMENT

- King-Pin : Component type-approved per ECE R 55 regulation, 2" or 3,5", removable and refittable from below.
- Mechanical Legs : Trailer support legs, each two-speed, with 25 ton dynamic and 50 ton static load capacity.
- Axles : Axle set, each 9 ~ 12 ton capacity, air-suspended, with drum or disc brakes.
- Rims : 14,00 – 11,75 – 9,00 x 22,5.
- Tyres : 425 - 385 / 65 R 22,5 (single) or 31/80 R 22,5 (twin).
- Brake System : EBS/ABS brake system compliant with ECE R 13 regulation.

- Electrical System : ADR electrical set compliant with ECE R 105 regulation.
- Bumper : Compliant with ECE R 58 regulation.
- Note: BARLAS reserves the right to make changes to its products. Technical data are approximate and refer to the standard product application. Dimensions may vary depending on the truck make and model. The information above does not constitute an offer. For further details about the product, please contact the company.

Steel Tanker



MODELS (2)

ADR Steel Tanker

Steel Tanker

Technical specifications below refer to the **ADR Steel Tanker** model; please request a quote for the other models.

TANK

- Manufactured with a bottle-type shell structure compliant with the EN 13094 standard, using a double-sided welding production system.
- Steel sheet with a minimum thickness of 4 mm is used in shell fabrication.
- Tank code: LGBF

CHASSIS

- Verified through FEA analysis and calculations performed in accordance with the vehicle superstructure.
- High-strength steel material is used for the chassis flange plate.

KING PIN

- The 2" king pin complies with SAE / DIN norms and is made of forged steel (42Cr Mo4) highly resistant to tensile failure; thanks to its bolted connections it can be replaced easily.

LANDING LEGS

- Two-speed mechanical landing leg system; 25 ton lifting and 50 ton payload capacity.

LIGHTING SYSTEM

- The vehicle features an electrical system compliant with ADR regulations.
- The valve cabinet houses 1 ex-proof push-button type lighting system.

EQUIPMENT

- Vehicle equipment complies with ADR norms.
- Manhole neck, breather valve, API coupling, footvalve, vapour adaptor, pneumatic control block.
- Manhole cover fitted with overfill sensor, vapour recovery valve and pressure relief valve.

WALKWAY

- Single-sided anti-slip walkway running along the right side of the tanker.
- Bolted ladder mounted at the right rear of the vehicle, providing access to the top of the tank shell.
- Handrail system pneumatically operated from ground level.
- Drain pipes at the rear of the spill trough discharge rainwater and product resulting from overfilling.

AXLE AND SUSPENSION SYSTEM

- Disc-braked axles with 3x9 ton payload capacity.
- Air suspension system.
- EBS brake system designed according to European standards.

STANDARD ACCESSORIES

- Spare wheel bay and jack-operated spare wheel carrier.
- 1 toolbox.
- The vehicle features 2 fire extinguisher cabinets.
- 1 traffic cone.
- 1 plastic water tank.
- 1 wheel chock.
- Separate mudguard for each tyre.
- Rear ladder.

- 4 m discharge hose with its housing.
- The vehicle features warning and marking plates.

TYRES

- 385/65 R22,5, 6+1 pieces

RIMS

- 6+1 pieces, size 11,75 x 22,5

OPTIONS

- Capacity
- Colour and logo
- Pump / Meter
- Axle
- Spare tyre

PAINT

- Cleaned with water and chemical mixtures, the vehicle can be oven-painted in the requested RAL colour code after 2 primer coats.

Gooseneck Tanker



DIMENSIONS

- Width: max. 2.550 mm.
- Height: max. 3.800 mm. *
- Axle Spacing: 1.310 mm.
- King-Pin Height: 1.250 mm.
- Tare Weight: 5.300 ~ 6.100 kg. *

CAPACITY

- Geometric Volume: 36.000 ~ 43.000 l. *
- Number of Compartments: 1 ~ 7 *

TANK

- Tank Code: LGBF
- Tank Class: Class 3
- Construction Material Series: Aluminium Alloy
- Products Carried: Petrol, Diesel, Jet A-1
- Operating Temperature: -20 °C +50 °C
- Certification: ADR - Turkey TSE / Germany KBA (Tüv)
- Varies according to the selected product type and optional equipment.

TANK SHELL

- Gooseneck-cylindrical cross-section design compliant with the EN 13094 design standard,
- 1 external dished end at the front and 1 at the rear, with internal dished ends / surge baffles to the EN 13094 design standard according to the selected number of compartments,
- ISO 3834 welded fabrication quality approval is held,
- Unique in the tanker manufacturing industry: a safe, smooth and even-surfaced shell with a minimised number of joint (T) points, built in the gooseneck and main shell structure from transversely seamless one-piece plates joined using the longest weld seam technology,
- Continuous, high-performance robotic welding technology minimises stress effects on the shell and human-induced welding defects, making the shell safe against impacts and collisions,
- To increase shell strength and reduce stress effects, robotic welding technology is applied to the OMEGA® monoblock connection saddles at the chassis joint points, allowing the saddles to grip the shell as a single piece,
- The slope built into the chassis design allows complete discharge with no liquid remaining in any tank compartment,
- Air gap safety against expansion and overflow, compliant with the EN 15120 standard.

FILLING LINE

- Bottom filling via couplings on the right-hand side (relative to driving direction), or top filling through the filling port on the manhole covers,

DISCHARGE LINE

- Free gravity discharge via EN 13094-compliant discharge piping located on the right-hand side (relative to driving direction), running from the footvalves to the couplings, sloped so no liquid remains in the line after discharge,
- Discharge pipes welded to imported patented elbows, holding ISO 3834 welded fabrication quality approval.

CHASSIS

- Custom-designed monoblock chassis, angled on the horizontal and vertical axes, matched to the shell design and providing rollover safety,
- OMEGA® monoblock connection saddles fit the chassis mounting seats perfectly, creating a rigid structure and increasing strength,
- Stress-relief openings in its structure distribute forces transferred from road conditions to the running gear, reducing stress,
- Chassis construction parts are manufactured with perfect fit by welders certified under the ISO 3834 welded fabrication quality approval, using synergic welding machines.

CHASSIS EQUIPMENT

- King-Pin: Component type-approved per ECE R 55 regulation, 2", removable and refittable from below
- Mechanical Legs: Trailer support legs, each two-speed, with 25 ton dynamic and 50 ton static load capacity
- Axles: Axle set, each 9 ton capacity, air-suspended, with disc brakes,
- Rims: 11,75 x 22,5 /0 ~ 120 offset
- Tyres: 385/65 R 22,5
- Brake System: 2S2M EBS brake system with RSP, compliant with ECE R 13 regulation
- Electrical System: ADR electrical set compliant with ECE R 105 regulation
- Bumper: Compliant with ECE R 58 regulation

PAINT

- Painting is applied with at least 2 coats of epoxy primer,
- Top coat: "OVEN-CURED PAINT" application with 2 coats of acrylic paint,
- Advanced technical equipment achieves homogeneous coverage at every point of the shell and a lacquer-gloss surface finish.
- BARLAS reserves the right to make changes to its products. Technical data are approximate values based on the standard product application. Dimensions may vary depending on the truck make and model. The information above does not constitute an offer. Contact us for further details about the product.

Elliptical Tanker



MODELS (2)

Truck-Mounted Elliptical Tanker

Elliptical Tanker Semi-Trailer

Technical specifications below refer to the **Truck-Mounted Elliptical Tanker** model; please request a quote for the other models.

DIMENSIONS

- Width: max. 2.550 mm.
- Height: max. 3.200 mm. *
- Tare Weight: 1.700 ~ 3.600 kg. *

CAPACITY

- Geometric Volume: 6.000 ~ 27.500 l. *
- Number of Compartments: 1 ~ 5 *

TANK

- Tank Code: LGBF
- Tank Class: Class 3
- Construction Material Series: Aluminium Alloy or Carbon Steel *
- Products Carried: Petrol, Diesel, Jet A-1
- Operating Temperature: -20 °C +50 °C
- Certification: ADR - Turkey TSE / Germany KBA (Tüv)
- Varies according to the truck model and your choice of optional equipment.

TANK SHELL

- Elliptical cross-section design compliant with the EN 13094 design standard,
- 1 external dished end at the front and 1 at the rear, with internal dished ends / surge baffles to the EN 13094 design standard according to the selected number of compartments,
- ISO 3834 welded fabrication quality approval is held,
- Unique in the tanker manufacturing industry: a safe, smooth and even-surfaced shell with a minimised number of joint (T) points, built in the elliptical shell structure from transversely seamless one-piece plates joined using the longest weld seam technology,
- Continuous, high-performance robotic welding technology minimises tension effects on the shell and human-induced welding defects, making the shell safe against impacts and collisions,
- To increase shell strength and reduce stress effects, robotic welding technology is applied to the OMEGA® monoblock connection saddles at the chassis joint points, allowing the saddles to grip the shell as a single piece,
- Special design ensuring complete discharge by preventing liquid from remaining in any tank compartment,
- Air gap safety against expansion and overflow, compliant with the EN 15120 standard.

FILLING LINE

- Bottom filling via couplings on the right-hand side (relative to driving direction), or top filling through the filling port on the manhole covers,

DISCHARGE LINE

- Free gravity or driven discharge via EN 13094-compliant discharge piping located on the right-hand side (relative to driving direction), running from the footvalves to the couplings, sloped so no liquid remains in the line after discharge,
- Discharge pipes welded to imported patented elbows, holding ISO 3834 welded fabrication quality approval.

AUXILIARY CHASSIS

- Custom-designed auxiliary chassis made of steel, matched to the shell design and providing rollover safety; it can be adapted to any type of truck chassis with bolted connections in line with the manufacturer's superstructure mounting instructions,
- OMEGA® monoblock connection saddles fit the chassis mounting seats perfectly, creating a rigid structure and increasing strength,
- Spring connections at the tank's front auxiliary chassis mountings distribute forces transferred from road conditions to the shell, reducing stress,
- Chassis construction parts are manufactured with perfect fit by welders certified under the ISO 3834 welded fabrication quality approval, using synergic welding machines.

CHASSIS EQUIPMENT

- Mudguard: Semi-circular rigid plastic mudguard mounted over each wheel with aluminium clamps
- Mud Flap: Component type-approved anti-spray mud flap compliant with regulation 109/2011/EU
- Side Protection: Protective equipment compliant with ECE R 73 regulation (cyclist guard, etc.)

PAINT

- At least 2 coats of epoxy primer are applied.
- As the top coat, an "OVEN-CURED PAINT" process is applied with 2 coats of acrylic paint.
- Advanced technical equipment achieves homogeneous coverage at every point of the shell and a lacquer-gloss surface finish.
- BARLAS reserves the right to make changes to its products. Technical data are approximate values based on standard product applications. Dimensions may vary depending on the truck make and model. The information above does not constitute an offer. Contact us for further details about the product.

Food Tanker



MODELS (4)

Truck-Mounted Food Tanker

Food Tanker Semi-Trailer

Chrome Food Tanker

Stainless Steel Tanker - Food

Technical specifications below refer to the **Truck-Mounted Food Tanker** model; please request a quote for the other models.

DIMENSIONS

- Width: max. 2.550 mm.
- Height: max 3.500 mm *
- Tare Weight: 2.000 ~ 3.850 kg *

CAPACITY

- Geometric Volume: 10.000 ~ 22.000 l *
- Number of Compartments: 1 ~ 3 *

TANK

- Construction Material Series: Stainless Steels *
- Products Carried: Milk, drinking water and similar liquid foods and oils *
- Operating Temperature: -20 °C +150 °C
- Varies according to the truck model and your choice of optional equipment.

TANK SHELL

- Cylindrical cross-section design compliant with the EN 14025 design standard,
- 1 external dished end at the front and 1 at the rear, with internal dished ends / surge baffles to the EN 13094 design standard according to the selected number of compartments,
- ISO 3834 welded fabrication quality approval is held,
- Unique in the tanker manufacturing industry: a safe, smooth and even-surfaced shell built from transversely seamless one-piece plates in the cylindrical shell structure, joined using the longest weld seam technology with the minimum number of joint (T) points,
- Continuous, high-performance robotic welding technology minimises tension effects on the shell and human-induced welding defects, making the shell safe against impacts and collisions,
- To increase shell strength and reduce stress effects, robotic welding technology is applied to the OMEGA® monoblock connection saddles at the chassis joint points, allowing the saddles to grip the shell as a single piece,
- Special design ensuring complete discharge by preventing liquid from remaining in any tank compartment,
- A cleaning manhole is provided for cleaning the tank interior and, when required, each compartment.

INSULATION

- The tank shell is clad with rock wool, providing full thermal insulation and preserving product temperature and fluidity for extended periods,
- Insulation cladding wrapping the shell circumferentially to prevent sagging, protecting against external effects, sealed at the joints with battens and heat-resistant rubber, and given a refined appearance, with front and rear insulation dished ends.

FILLING LINE

- Bottom filling via couplings on the right-hand side (relative to driving direction) or at the rear; top filling through the manhole covers or via closed-circuit filling couplings,

DISCHARGE LINE

- Free gravity discharge via EN 13094-compliant discharge piping located on the right-hand side (relative to driving direction), running from the footvalves to the couplings, sloped so no liquid remains in the line after discharge,
- Discharge pipes welded to imported patented elbows, holding ISO 3834 welded fabrication quality approval.

EQUIPMENT

- Made of standards-compliant stainless material, suitable for liquid food transport contents.

AUXILIARY CHASSIS

- Custom-designed auxiliary chassis made of steel, matched to the shell design and providing rollover safety; it can be adapted to any type of truck chassis with bolted connections in line with the manufacturer's superstructure mounting instructions,
- OMEGA® monoblock connection saddles fit the chassis mounting seats perfectly, creating a rigid structure and increasing strength,
- Spring connections at the tank's front auxiliary chassis mountings distribute forces transferred from road conditions to the shell, reducing stress,
- Chassis construction parts are manufactured with perfect fit by welders certified under the ISO 3834 welded fabrication quality approval, using synergic welding machines.

CHASSIS EQUIPMENT

- Mudguard: Semi-circular rigid plastic mudguard mounted over each wheel with aluminium clamps
- Mud Flap: Component type-approved anti-spray mud flap compliant with regulation 109/2011/EU
- Side Protection: Protective equipment compliant with ECE R 73 regulation (cyclist guard, etc.)

PAINT

- Passivation applied after pickling inside the tank prevents bacterial growth and chemical corrosion,
- The tank exterior is painted with at least 2 coats of epoxy primer,
- Top coat: "OVEN-CURED PAINT" application with 2 coats of acrylic paint,
- Advanced technical equipment achieves homogeneous coverage at every point of the shell and a lacquer-gloss surface finish.
- BARLAS reserves the right to make changes to its products. Technical data are approximate values based on the standard product application. Dimensions may vary depending on the truck make and model. The information above does not constitute an offer. Contact us for further details about the product.

Insulated Tanker



DIMENSIONS

- Width: max. 2.550 mm.
- Height: max. 3.800 mm. *
- Axle Spacing: 1.300 ~ 1.400 mm *
- King-Pin Height: 1.250 ~ 1.350 mm *
- Tare Weight: 7.800 ~ 9.750 kg *

CAPACITY

- Geometric Volume: 26.000 ~ 36.000 l *
- Number of Compartments: 1 ~ 5 *

TANK

- Tank Code: L1, 5BN or L4BH *
- Tank Class: Class 3, 6, 8 *
- Construction Material Series: Stainless Steels *
- Products Carried: Chemicals listed in ADR Part 3 appropriate to the tank code and hierarchy *
- Operating Temperature: -20 °C +50/1500 C *
- Certification: ADR - Turkey TSE / Germany KBA (Tüv)
- Varies according to the selected product type and optional equipment.

TANK SHELL

- Cylindrical cross-section design compliant with the EN 14025 design standard,
- 1 external dished end at the front and 1 at the rear, with internal dished ends / surge baffles to the EN 14025 design standard according to the selected number of compartments,
- ISO 3834 welded fabrication quality approval is held,
- Unique in the tanker manufacturing industry: a safe, smooth and even-surfaced shell built from transversely seamless one-piece plates in the cylindrical shell structure, joined using the longest weld seam technology with the minimum number of joint (T) points,

- Continuous, high-performance robotic welding technology minimises stress effects on the shell and human-induced welding defects, making the shell safe against impacts and collisions,
- To increase shell strength and reduce stress effects, robotic welding technology is applied to the OMEGA® monoblock connection saddles at the chassis joint points, allowing the saddles to grip the shell as a single piece,
- Special design ensuring complete discharge by preventing liquid from remaining in any tank compartment,
- Cleaning manhole for cleaning the tank interior and, when required, each compartment,
- Air gap safety against expansion and overflow, compliant with the EN 15120 standard.

INSULATION

- The tank shell is clad with rock wool, providing full thermal insulation and preserving product temperature and fluidity for extended periods,
- Insulation cladding wrapping the shell circumferentially to prevent sagging, protecting against external effects, sealed at the joints with battens and heat-resistant rubber, and given a refined appearance, with front and rear insulation dished ends.

HEATING SYSTEM

- Hot water or steam passed through stainless pipes on the inner tank floor, resistant to the operating temperature, keeps the product uniformly fluid.

FILLING LINE

- Bottom filling via couplings on the right-hand side (relative to driving direction) or at the rear; top filling through the manhole covers or via closed-circuit filling couplings,

DISCHARGE LINE

- Free gravity discharge via EN 13094-compliant discharge piping located on the right-hand side (relative to driving direction) or at the rear, running from the footvalves to the couplings, sloped so no liquid remains in the line after discharge,
- Discharge pipes welded to imported patented elbows, holding ISO 3834 welded fabrication quality approval.

EQUIPMENT

- Filling couplings made of standards-compliant stainless material, suitable for chemical contents and preventing release of the transported chemical into the environment,

CHASSIS

- Custom-designed monoblock chassis, angled on the horizontal and vertical axes, matched to the shell design and providing rollover safety,
- OMEGA® monoblock connection saddles fit the chassis mounting seats perfectly, creating a rigid structure and increasing strength,
- Stress-relief openings in its structure distribute forces transferred from road conditions to the running gear, reducing stress,
- Chassis construction parts are manufactured with perfect fit by welders certified under the ISO 3834 welded fabrication quality approval, using synergic welding machines.

CHASSIS EQUIPMENT

- King-Pin: Component type-approved per ECE R 55 regulation, 2" or 3.5", removable and refittable from below,
- Mechanical Legs: Trailer support legs, each two-speed, with 25 ton dynamic and 50 ton static load capacity,
- Axles: Axle set, each 9 or 10 ton capacity, air-suspended, with disc brakes,
- Rims: 14,00 or 11,75 x 22,5
- Tyres: 425 or 385 /65 R 22,5
- Brake System: 2S2M EBS brake system with RSP, compliant with ECE R 13 regulation
- Electrical System: ADR electrical set compliant with ECE R 105 regulation
- Bumper: Compliant with ECE R 58 regulation

PAINT

- Passivation applied after pickling inside the tank prevents bacterial growth and chemical corrosion,
- The tank exterior is painted with at least 2 coats of epoxy primer,
- Top coat: "OVEN-CURED PAINT" application with 2 coats of acrylic paint,
- Advanced technical equipment achieves homogeneous coverage at every point of the shell and a lacquer-gloss surface finish.
- BARLAS reserves the right to make changes to its products. Technical data are approximate values based on the standard product application. Dimensions may vary depending on the truck make and model. The information above does not constitute an offer. Contact us for further details about the product.

Chemical Tanker



MODELS (3)

Truck-Mounted Chemical Tanker

Chemical Tanker Semi-Trailer

Chemical Tanker

Technical specifications below refer to the **Truck-Mounted Chemical Tanker** model; please request a quote for the other models.

DIMENSIONS

- Width: max. 2.550 mm.
- Height: max. 3.500 mm. *
- Tare Weight: 3.000 ~ 3.850 kg *

CAPACITY

- Geometric Volume: 12.000 ~ 25.000 l. *
- Number of Compartments: 1 ~ 4 *

TANK

- Tank Code: L1, 5BN
- Tank Class: Class 3, 6, 8 *
- Construction Material Series: Stainless Steels *
- Products Carried: Chemicals listed in ADR Part 3 appropriate to the tank code and hierarchy *
- Operating Temperature: -20 °C +50 °C
- Certification: ADR - Turkey TSE / Germany KBA (Tüv)
- Varies according to the truck model and your choice of optional equipment.

TANK SHELL

- Cylindrical cross-section design compliant with the EN 14025 design standard,
- 1 external dished end at the front and 1 at the rear, with internal dished ends / surge baffles to the EN 13094 design standard according to the selected number of compartments,
- ISO 3834 welded fabrication quality approval is held,
- Unique in the tanker manufacturing industry: a safe, smooth and even-surfaced shell built from transversely seamless one-piece plates in the cylindrical shell structure, joined using the longest weld seam technology with the minimum number of joint (T) points,
- Continuous, high-performance robotic welding technology minimises tension effects on the shell and human-induced welding defects, making the shell safe against impacts and collisions,
- To increase shell strength and reduce stress effects, robotic welding technology is applied to the OMEGA® monoblock connection saddles at the chassis joint points, allowing the saddles to grip the shell as a single piece,
- Special design ensuring complete discharge by preventing liquid from remaining in any tank compartment,
- A cleaning manhole is provided for cleaning the tank interior and, when required, each compartment.

FILLING LINE

- Bottom filling via couplings on the right-hand side (relative to driving direction) or at the rear; top filling through the manhole covers or via closed-circuit filling couplings,

DISCHARGE LINE

- Free gravity discharge via EN 13094-compliant discharge piping located on the right-hand side (relative to driving direction), running from the footvalves to the couplings, sloped so no liquid remains in the line after discharge,
- Discharge pipes welded to imported patented elbows, holding ISO 3834 welded fabrication quality approval,

EQUIPMENT

- Made of standards-compliant stainless material, suitable for chemical contents,
- Filling couplings prevent release of the transported chemical into the environment.

AUXILIARY CHASSIS

- Custom-designed auxiliary chassis made of steel, matched to the shell design and providing rollover safety; it can be adapted to any type of truck chassis with bolted connections in line with the manufacturer's superstructure mounting instructions,
- OMEGA® monoblock connection saddles fit the chassis mounting seats perfectly, creating a rigid structure and increasing strength,
- Spring connections at the tank's front auxiliary chassis mountings distribute forces transferred from road conditions to the shell, reducing stress,
- Chassis construction parts are manufactured with perfect fit by welders certified under the ISO 3834 welded fabrication quality approval, using synergic welding machines.

CHASSIS EQUIPMENT

- Mudguard: Semi-circular rigid plastic mudguard mounted over each wheel with aluminium clamps
- Mud Flap: Component type-approved anti-spray mud flap compliant with regulation 109/2011/EU
- Side Protection: Protective equipment compliant with ECE R 73 regulation (cyclist guard, etc.)

PAINT

- Passivation applied after pickling inside the tank prevents bacterial growth and chemical corrosion,
- The tank exterior is painted with at least 2 coats of epoxy primer,
- Top coat: "OVEN-CURED PAINT" application with 2 coats of acrylic paint,
- Advanced technical equipment achieves homogeneous coverage at every point of the shell and a lacquer-gloss surface finish.
- BARLAS reserves the right to make changes to its products. Technical data are approximate values based on the standard product application. Dimensions may vary depending on the truck make and model. The information above does not constitute an offer. Contact us for further details about the product.

Conical Tanker



DIMENSIONS

- Width: max. 2.550 mm.
- Height: max. 3.800 mm. *
- Axle spacing range: 1.300 ~ 1.400 mm. *
- King-pin height: 1.250 ~ 1.350 mm. *
- Tare weight: 5.250 ~ 5.800 kg. *

CAPACITY

- Geometric volume: 28.000 ~ 54.000 l. *
- Number of compartments: 1 ~ 7 *

TANK

- Tank code: LGBF
- Tank class: Class 3
- Construction material series: Aluminium alloy, carbon steel or stainless steel *
- Products carried: Petrol, diesel, Jet A-1
- Operating temperature: -20 °C +50 °C
- Certification: ADR - Turkey TSE / Germany KBA (Tüv)
- Varies according to the selected product type and optional equipment.

TANK SHELL

- Conical-cylindrical cross-section, designed in compliance with the EN 13094 design standard,
- One external dished end at the front and one at the rear, with internal dished ends / surge baffles to the EN 13094 design standard according to the selected number of compartments,
- ISO 3834 welded fabrication quality approval is held,
- A unique tank shell in the tanker manufacturing sector: the conical and main shell sections are built from transversally seamless one-piece plates joined using the longest-weld-seam technology, minimising the number of junction (T) points and delivering a safe, smooth and even surface,
- Continuous, high-performance robotic welding technology minimises stress effects on the shell and welding defects caused by the human factor, making the shell safe against impacts and collisions,
- To increase shell strength and reduce stress, the tank and its connections at the chassis joints are tested by finite element analysis under the maximum permissible load; robotic welding is applied to the OMEGA monoblock mounting saddles so that the saddles grip the shell as a single piece,
- The slope built into the chassis design ensures complete discharge with no liquid remaining in any tank compartment,
- Air-gap (ullage) safety compliant with EN 15120 against expansion and overflow.

FILLING LINE

- Bottom filling via couplings on the right-hand side in the direction of travel, or top filling through the filling opening on the manhole covers,

DISCHARGE LINE

- Free gravity discharge through EN 13094-compliant discharge piping located on the right-hand side in the direction of travel, running from the footvalves to the couplings with a slope that leaves no liquid in the line after discharge,
- Discharge pipes welded to imported patented elbows, holding ISO 3834 welded fabrication quality approval.

CHASSIS

- Special-design monoblock chassis, angled on the horizontal and vertical axes, matched to the shell design and providing anti-rollover safety,
- OMEGA® monoblock mounting saddles fit the chassis mounting seats perfectly, forming a rigid structure and increasing strength,
- Stress-relief openings in the structure distribute the forces transferred from road conditions to the running gear, reducing stress,
- The chassis structural components are fabricated in perfect alignment by certified welders using synergic welding machines under ISO 3834 welded fabrication quality approval.

CHASSIS EQUIPMENT

- King-pin: Component type-approved to ECE R 55, 2" or 3.5", removable and refittable from below
- Landing legs: Two-speed trailer landing legs, each rated for 25 ton dynamic and 50 ton static load
- Axles: Axle set with air suspension and disc brakes, each rated at 9 or 10 ton
- Rims: 14,00 or 11,75 x 22,5
- Tyres: 425 or 385 /65 R 22,5
- Brake system: 2S2M EBS brake system with RSP, compliant with ECE R 13
- Electrical system: ADR electrical set compliant with ECE R 105
- Bumper: Compliant with ECE R 58

PAINT

- At least 2 coats of epoxy primer are applied.
- The finish is an oven-cured paint process with 2 coats of acrylic paint.
- Advanced technical equipment provides a homogeneous distribution over every point of the shell and a varnish-gloss surface finish.
- BARLAS reserves the right to make changes to its products. The technical data given are approximate values based on the standard product configuration. Dimensions may vary depending on the truck make and model. The information above does not constitute an offer. Please contact us for further product details.

Stainless Steel Acid Tanker



DIMENSIONS

- Width : max. 2.550 mm.
- Height : max. 4.000 mm. *
- Axle spacing : 1.300 ~ 1.400 mm. *
- King-pin height : 1.250 ~ 1.350 mm. *
- Tare weight : 6.000 ~ 9.750 kg. *

CAPACITY

- Geometric volume : 20.000 ~ 32.000 l. *
- Number of compartments : 1 ~ 5 *

TANK

- Construction material series : Stainless steel *
- Products carried : Products suitable for hazardous goods and acid transport *
- Operating temperature : -20 °C / +150 °C
- Varies according to the selected product type and optional equipment.

TANK SHELL

- Cylindrical cross-section, designed in compliance with the EN 14025 design standard.
- One external dished end at the front and one at the rear; internal dished ends / surge baffles to the EN 14025 design standard according to the selected number of compartments.
- Holds ISO 3834 welded fabrication quality approval.
- A unique tank shell in the tanker manufacturing sector: the cylindrical shell is built from transversally seamless one-piece plates joined using the longest-weld-seam technology, with the minimum number of junction (T) points and a safe, smooth and even surface.
- Continuous, high-performance robotic welding technology minimises stress effects on the shell and welding defects caused by the human factor, making the shell safe against impacts and collisions.

- To increase shell strength and reduce stress, robotic welding is applied to the monoblock mounting saddles at the chassis joints, ensuring the saddles grip the shell as a single piece.
- Special design providing complete discharge with no liquid remaining in any tank compartment.
- A cleaning manhole is provided for cleaning the tank interior and, where required, each compartment.
- Air-gap (ullage) safety compliant with EN 15120 against expansion and overflow.

INSULATION

- The tank shell is clad with rock wool, providing full thermal insulation and preserving product temperature and fluidity for extended periods.
- Insulation cladding with front and rear insulation dished ends wraps the applied insulation circumferentially, preventing sagging and protecting it from external effects; joint tightness is ensured with battens and heat-resistant rubber, giving a clean visual finish.

FILLING LINE

- Bottom filling is via couplings on the right-hand side in the direction of travel or at the rear; top filling is through the manhole covers or via closed-circuit filling couplings.

DISCHARGE LINE

- Free gravity discharge through EN 13094-compliant discharge piping located on the right-hand side in the direction of travel, running from the footvalves to the couplings with a slope that leaves no liquid in the line after discharge.
- Discharge pipes are welded to imported patented elbows under ISO 3834 welded fabrication quality approval.

EQUIPMENT

- Stainless equipment compliant with the applicable standards and suitable for chemical and acid transport.

CHASSIS

- Special-design monoblock chassis, angled horizontally and vertically, matched to the shell design and providing anti-rollover safety.
- Monoblock mounting saddles fit the chassis mounting seats perfectly, forming a rigid structure and increasing strength.
- Stress-relief openings on the chassis distribute the forces transferred from road conditions to the running gear and reduce stress.
- Chassis structural components are fabricated in perfect alignment by certified welders using synergic welding machines under ISO 3834 welded fabrication quality approval.


CHASSIS EQUIPMENT

- King-pin : Component type-approved to ECE R 55, 2" or 3.5", removable and refittable from below.
- Landing legs : Two-speed trailer landing legs, each rated for 25 ton dynamic and 50 ton static load.
- Axles : Axle set with air suspension and disc brakes, each rated at 9 or 10 ton.
- Rims : 14,00 or 11,75 x 22,5.
- Tyres : 425 or 385 / 65 R 22,5.
- Brake system : 2S2M EBS brake system with RSP, compliant with ECE R 13.
- Electrical system : ADR electrical set compliant with ECE R 105.
- Bumper : Compliant with ECE R 58.

PAINT

- Passivation carried out after pickling inside the tank prevents bacterial growth and chemical corrosion.
- The tank exterior is painted with at least 2 coats of epoxy primer.
- The oven-cured finish coat is applied with 2 coats of acrylic paint.
- Advanced technical equipment provides a homogeneous distribution over every point of the shell and a varnish-gloss surface finish.
- Note: BARLAS reserves the right to make changes to its products. The technical data are approximate values and refer to the standard product configuration. Dimensions may vary depending on the truck make and model. The information above does not constitute an offer. Please contact the company for further product details.

Stainless Steel Insulated Tanker

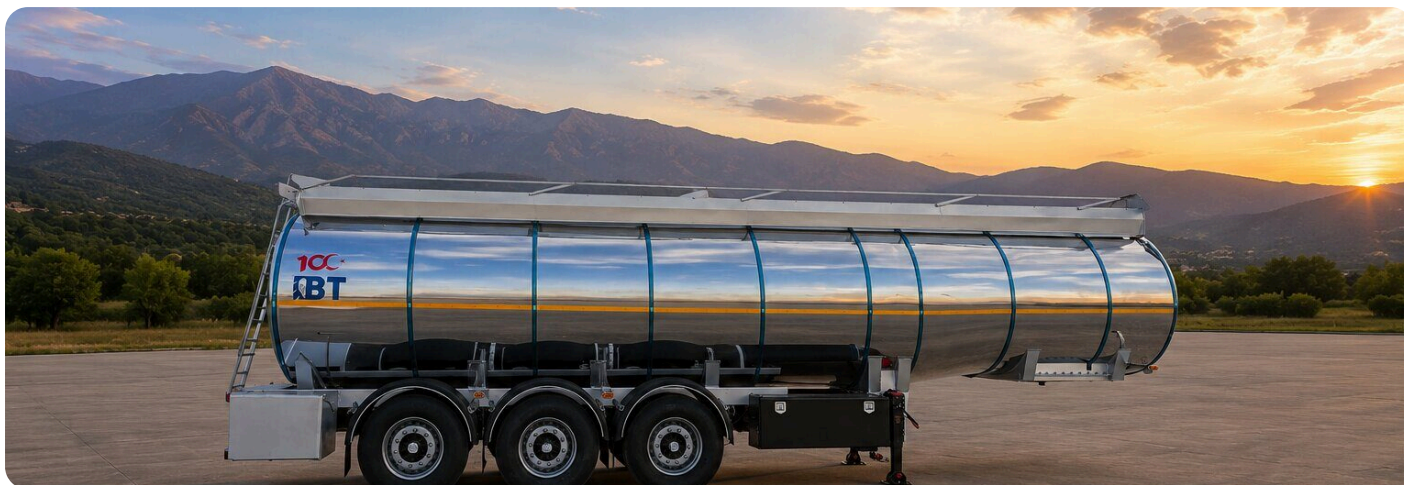

- Barlas: stainless steel insulated tanker manufacturing
- Specialising in stainless steel insulated tankers, Barlas maintains its leading position in the sector. These tankers provide a reliable and effective solution, primarily for chemical and hazardous goods transport. Stainless steel insulated tankers manufactured by Barlas are produced from high-quality materials through dedicated design and manufacturing processes.

SUPERIOR QUALITY AND SAFETY

- Barlas manufactures its stainless steel insulated tankers with solutions customised to customer requirements and in compliance with industry standards. Each tanker is built from durable, corrosion-resistant materials for long service life, and is equipped with high leak-tightness characteristics and designs that meet safety standards.

TECHNOLOGICAL INNOVATION AND PERFORMANCE

- Using the latest technology in its production processes, Barlas aims to deliver maximum performance and efficiency. The insulation technologies used in stainless steel insulated tankers provide temperature control and protection against environmental effects, taking product safety to the highest level.

ENVIRONMENTALLY RESPONSIBLE APPROACH

- Committed to environmentally friendly production principles, Barlas also takes a responsible approach to waste management and energy efficiency. The recyclability of the materials chosen for stainless steel insulated tankers and sustainable production processes help minimise environmental impact.

CUSTOMER-FOCUSED SOLUTIONS

- Developing flexible, customer-focused approaches to meet each customer's specific requirements, Barlas maintains its sector leadership by prioritising customer satisfaction through professional after-sales services and its technical support team.

LPG Tanker



MODELS (3)

LPG Tanker

Truck-Mounted LPG Tanker

LPG Tanker Semi-Trailer

Technical specifications below refer to the **LPG Tanker** model; please request a quote for the other models.

BRAND

BARLAS

TANK TYPE

HORIZONTAL CYLINDRICAL

PROJECT CODE

- AD-2000 / PED97 /23/EC

DESIGN TEMPERATURE

- Min -20°C / max +50°C

DESIGN PRESSURE

- 17,5 bar

TEST PRESSURE

- 26,5 bar

MATERIAL

- P 355 (compliant with EN 10028-2/3)
- For the shell, dished ends and pressure-bearing parts of the transport tank, P 355 grade steel sheet compliant with EN 10028-3 and meeting the properties required by the standard is used.
- The material used is certified to at least 3.1b according to EN 10204.

DISHED END TYPE

ELLIPSOIDAL

TANK OUTER DIAMETER

- 2.400 mm

TANK SHELL THICKNESS

- 10 mm (SINGLE WELD)

TANK DISHED END THICKNESS

- 12 mm (ONE PIECE)

TANK OVERALL LENGTH

- 12.000 mm

CORROSION ALLOWANCE

- 1 mm

TANK VOLUME

- 50 m³

TANK-MOUNTED EQUIPMENT

- 2" hydraulic valve → 2 pcs
- 3" hydraulic valve → 1 pc
- Hydraulic operator → 1 pc
- 2" ball valve → 3 pcs
- 2" safety relief valve → 2 pcs
- Rotogauge (rotary level gauge) → 1 pc
- Glycerine-filled pressure gauge (0-25 bar) Ø63 → 1 pc
- Thermometer (-30/60 °C) Ø63 → 1 pc
- Acme adaptor and cap → 3 pcs
- Drain valve → 1 pc

Shot blasting and painting

- The tank exterior is shot blasted to SA2.5 quality; shop primer is applied to the blasted surfaces, followed by epoxy primer and a white acrylic top coat.
- In addition, a 30 cm wide red stripe is applied along the tank axis.
- Other hazardous goods markings and lettering requested by the customer are applied to the tank.

Inspection (examinations and tests)

- The tank is subjected to a hydrostatic test with inspection costs borne by BARLAS; the test certificate is issued by the independent inspection body GERMANISCHER LLOYD.
- Hydrostatic pressure test
- Dimensional check
- Material inspection and certification
- Review and verification of the design and calculations

OUR QUALITY CERTIFICATES

- ISO 9001-2008
- EN 3834-2

WELDING METHOD

- All our welders are certified to EN 287-1:2004.
- Submerged arc welding is carried out by certified welders and full penetration is achieved.
- Weld grooves compliant with the standards are prepared at all joints.
- Weld filler materials comply with EN ISO 14171.

Welding methods applied on the tank

- Shell and dished end welds : SAW or SMAW + SAW
- Nozzle welds : GTAW or SMAW
- Other welds : GTAW or SMAW

HEAT TREATMENT

- Stress-relief annealing is applied to the dished ends only.

SURGE BAFFLES

- Although the standard requires 2, Barlas tanks are fitted with 3 surge baffles.

RADIOGRAPHIC INSPECTION

- Weld seams are subjected to radiographic inspection as required by the design code.

Stainless Steel Tanker – Hazardous Goods



TECHNICAL DIMENSIONS

- Fifth wheel height (H5): 1.220 mm
- Tank diameter (D): 2.000 mm
- Axle spacing (WB): 6.300 mm
- Overall length (L): 11.125 mm
- Volume: 32,0 m³
- Tare weight ±3%: 6.400 kg
- Operating temperature °C: The operating temperature is 250°C.
- Test pressure (+h Bar): 4,0 Bar
- Operating pressure (Bar): The operating pressure is 2,0 bar
- Axle spacing (WB): 5.900 mm
- Overall length (L): 10.530 mm
- Tare weight ±3%: 6.860 kg
- Operating temperature °C: The operating temperature is 150°C.
- Operating pressure (Bar): The operating pressure is 3,0 bar

TECHNICAL CAPACITY

- Axle load: 27.000 kg
- King pin capacity: 12.000 kg
- Gross weight: 39.000 kg

BODY TYPE

- The cylindrical-section shell is made of AISI 321 (DIN 1.4541) grade stainless steel; each compartment, separated by surge baffles positioned in accordance with EN 14025 for ease of cleaning, has a filling manhole or cleaning manhole compliant with EN 14025. The shell has a sloped design that prevents liquid remaining in the tank during discharge and carries the L4BH ADR code in accordance with EN 14025.
- The cylindrical-section shell is made of AISI 316Ti (DIN 1.4571) grade stainless steel; each compartment, separated by surge baffles positioned in accordance with EN 14025 for ease of cleaning, has a filling manhole or cleaning manhole compliant with EN 14025. The shell has a sloped design that prevents liquid remaining in the tank during discharge and carries the L4BH ADR code in accordance with EN 14025.

CHASSIS TYPE

- The chassis consists of two extruded box-profile main beams of special cross-section with increased strength, made of high-quality, high-strength special aluminium alloy; it has special-design aluminium cross members and complies with ISO 1726 standards.
- It consists of two extruded box-profile main beams of special cross-section with increased strength, made of high-quality, high-strength AISI 304 (DIN 1.4301) grade stainless steel, with special-design stainless steel cross members. Electropolishing applied to the standards defined in ISO 15730: 2 000 provides reliable corrosion protection, visual appeal and surface brightness. The surface brightness retains the same appearance for many years. Hydrogen embrittlement is eliminated.

BRAKE SYSTEM

- The vehicle is equipped with a dual-circuit electro-pneumatic brake system featuring an EBS 2S/2M anti-lock system compliant with UN ECE R13 and an RSS electronic stability control system integrated into the brake system.

TYRE SIZE

- Tyres are 385/65 R 22.5.

AXLES

- BPW axles, 3 x 9 ton capacity, with air suspension and disc brakes.

ELECTRICAL SYSTEM

- The lighting system is ASPÖCK brand.
- The lighting system is ASPÖCK equipment compliant with UN ECE R48 and ADR regulations, with 2 x 7 and 1 x 15 pin sockets and 24 V LED side marker lamps.

NUMBER OF MANHOLES

- 1 pc.

DISCHARGE LINE

- The discharge line starts with a handwheel-operated 4" footvalve compliant with EN14433; it continues with a second safety valve (a mechanically operated shut-off valve compliant with EN14432), which plays a key role in safe discharge, and ends towards the rear of the vehicle with a 3" female TW coupling and its blank cap. Between the second shut-off valve and the 3" TW coupling there is a 1/2" sampling valve for taking samples.
- The discharge line starts with a pneumatically operated 4" footvalve compliant with EN14433 and continues with a second safety valve (a manually operated 4" butterfly valve compliant with EN14432), which plays a key role in safe discharge. Reduced from 4" to 3" towards the rear of the vehicle, the discharge line ends with a 3" female TW coupling and its blank cap. Between the butterfly valve and the TW coupling there is a 1" blow line that can be used for taking samples or for completely purging product remaining in the hoses after discharge.

HOSE CARRIER

- The vehicle has a 1 x 6 m hose box.
- The vehicle has a 1 x 6 m DN150 stainless hose carrier.

COMPARTMENT VOLUME DISTRIBUTION

- Single-compartment tanker with 30.000 l capacity.

NUMBER OF COMPARTMENTS

- The tank has 1 compartment, with an internal surge baffle for every 7500 litres of volume (in accordance with ADR regulation 4.3.2.2.4).

Stainless Steel Tanker - Non-Hazardous Goods



TECHNICAL DIMENSIONS

- Fifth wheel height (H5): 1.220 mm
- Tank diameter (D): 2.000 mm
- Axle spacing (Wb): 6.050 mm
- Overall length (L): 10.895 mm
- Volume: 32 m³ gross volume
- Tare weight ±3%: 6.380 kg
- Operating temperature °C: The operating temperature is 80°C.
- Gross weight: 39.000 kg

TECHNICAL CAPACITY

- Axle load: 27.000 kg
- King pin capacity: 12.000 kg

CHASSIS TYPE

- The chassis consists of two I-section (double-T) profile main beams made of high-quality, high-strength welded steel.

BRAKE SYSTEM

- Dual-circuit electro-pneumatic brake system; equipped with an EBS 2S / 2M anti-lock system compliant with UN ECE R13 and an RSS electronic stability control system integrated into the brake system.

TYRE SIZE

- Tyres are 385/65 R 22.5.

AXLES

- BPW axles, 3 x 9 ton capacity, with air suspension and disc brakes.

ELECTRICAL SYSTEM

- The lighting system is ASPÖCK brand.

NUMBER OF COMPARTMENTS

- 1 compartment with 4 surge baffles.

NUMBER OF MANHOLES

- The tank has 5 DN450 filling manholes.

OUTLET VALVE

- The discharge line starts at the tank bottom with a mechanically lever-operated ball valve of nominal diameter 4; it splits to the right and left, extending into the discharge cabinets on both sides of the vehicle. Inside the discharge cabinet the line is reduced from 4 to 3 and ends with a mechanically operated ball valve of nominal diameter 3, the outlet coupling and its blank cap.

HOSE CARRIER

- The vehicle is not fitted with a hose carrier.

Cylindrical Tanker



MODELS (2)

Truck-Mounted Cylindrical Tanker

Cylindrical Tanker Semi-Trailer

Technical specifications below refer to the **Truck-Mounted Cylindrical Tanker** model; please request a quote for the other models.

DIMENSIONS

- Width: max. 2.550 mm.
- Height: max. 3.500 mm. *
- Tare weight: 1.700 ~ 3.500 kg. *

CAPACITY

- Geometric volume: 6.000 ~ 26.000 l. *
- Number of compartments: 1 ~ 5 *

TANK

- Tank code: LGBF
- Tank class: Class 3
- Construction material series: Aluminium alloy or carbon steel *
- Products carried: Petrol, diesel, Jet A-1
- Operating temperature: -20 °C +50 °C
- Certification: ADR - Turkey TSE / Germany KBA (Tüv)
- Varies according to the truck model and the optional equipment you select.

TANK SHELL

- Cylindrical cross-section design, compliant with the EN 13094 design standard.
- One external dished end at the front and one at the rear, with internal dished ends / surge baffles to the EN 13094 design standard according to the selected number of compartments,
- ISO 3834 welded fabrication quality approval is held,
- A unique tank shell in the tanker manufacturing sector: the cylindrical shell is built from transversally seamless one-piece plates joined using the longest-weld-seam technology, with the minimum number of junction (T) points and a safe, smooth and even surface,
- Continuous, high-performance robotic welding technology minimises stress effects on the shell and welding defects caused by the human factor, making the shell safe against impacts and collisions,
- To increase shell strength and reduce stress, robotic welding is applied to the OMEGA® monoblock mounting saddles at the chassis joints, ensuring the saddles grip the shell as a single piece,
- Special design ensuring complete discharge by preventing liquid remaining in any tank compartment,
- Air-gap (ullage) safety compliant with EN 15120 against expansion and overflow.

FILLING LINE

- Bottom filling is via couplings on the right-hand side in the direction of travel, or top filling through the filling opening on the manhole covers.

DISCHARGE LINE

- Free gravity or powered discharge through EN 13094-compliant discharge piping located on the right-hand side in the direction of travel, running from the footvalves to the couplings with a slope that leaves no liquid in the line after discharge,
- Discharge pipes welded to imported patented elbows, holding ISO 3834 welded fabrication quality approval.

AUXILIARY CHASSIS

- Special-design auxiliary chassis made of steel, matched to the shell design and providing anti-rollover safety; it can be adapted to any type of truck chassis with bolted connections in line with the manufacturer's bodywork mounting instructions,
- OMEGA® monoblock mounting saddles fit the chassis mounting seats perfectly, forming a rigid structure and increasing strength,
- Spring connections at the tank's front auxiliary chassis mountings distribute the forces transferred from road conditions to the shell, reducing stress,
- The chassis structural components are fabricated in perfect alignment by certified welders using synergic welding machines under ISO 3834 welded fabrication quality approval.

CHASSIS EQUIPMENT

- Mudguards: Semi-circular rigid plastic mudguard mounted over each wheel with an aluminium clamp
- Mud flaps: Component type-approved anti-spray mud flaps compliant with regulation 109/2011/EU
- Side protection: Protective equipment compliant with ECE R 73 (cycle guard etc.)

PAINT

- Painting is carried out with at least 2 coats of epoxy primer,
- The finish is an oven-cured paint process with 2 coats of acrylic paint,
- Advanced technical equipment provides a homogeneous distribution over every point of the shell and a varnish-gloss surface finish.
- BARLAS reserves the right to make changes to its products. The technical data are approximate values based on standard product configurations. Dimensions may vary depending on the truck make and model. The information above does not constitute an offer. Please contact us for further product details.

Water Tanker



DIMENSIONS

- Width: max. 2.550 mm.
- Height: max 3.800 mm *
- Axle spacing: 1.300 ~ 1.400 mm *
- King-pin height: 1.250 ~ 1.350 mm *
- Tare weight: 7.250 ~ 8.800 kg *

CAPACITY

- Geometric volume: 26.000 ~ 36.000 l *
- Number of compartments: 1 ~ 3 *

TANK

- Construction material series: Stainless and carbon steel *
- Products carried: Drinking and utility water *
- Operating temperature: -20 °C +50 °C
- Varies according to the selected product type and optional equipment.

TANK SHELL

- Cylindrical cross-section, designed in compliance with the EN 14025 design standard,
- One external dished end at the front and one at the rear, with internal dished ends / surge baffles to the EN 14025 design standard according to the selected number of compartments,
- ISO 3834 welded fabrication quality approval is held,
- A unique tank shell in the tanker manufacturing sector: the cylindrical shell is built from transversally seamless one-piece plates joined using the longest-weld-seam technology, with the minimum number of junction (T) points and a safe, smooth and even surface,
- Continuous, high-performance robotic welding technology minimises stress effects on the shell and welding defects caused by the human factor, making the shell safe against impacts and collisions,

- To increase shell strength and reduce stress, robotic welding is applied to the OMEGA® monoblock mounting saddles at the chassis joints, ensuring the saddles grip the shell as a single piece,
- Special design ensuring complete discharge by preventing liquid remaining in any tank compartment,
- A cleaning manhole for cleaning the tank interior and, where required, each compartment,
- Air-gap (ullage) safety compliant with EN 15120 against expansion and overflow.

FILLING LINE

- Bottom filling via couplings on the right-hand side in the direction of travel or at the rear; top filling through the manhole covers or via closed-circuit filling couplings,

DISCHARGE LINE

- Free gravity discharge through EN 13094-compliant discharge piping located on the right-hand side in the direction of travel, running from the footvalves to the couplings with a slope that leaves no liquid in the line after discharge,
- Discharge pipes welded to imported patented elbows, holding ISO 3834 welded fabrication quality approval.

CHASSIS

- Special-design monoblock chassis, angled on the horizontal and vertical axes, matched to the shell design and providing anti-rollover safety,
- OMEGA® monoblock mounting saddles fit the chassis mounting seats perfectly, forming a rigid structure and increasing strength,
- Stress-relief openings in the structure distribute the forces transferred from road conditions to the running gear, reducing stress,
- The chassis structural components are fabricated in perfect alignment by certified welders using synergic welding machines under ISO 3834 welded fabrication quality approval.

CHASSIS EQUIPMENT

- King-pin: Component type-approved to ECE R 55, 2" or 3.5", removable and refittable from below
- Landing legs: Two-speed trailer landing legs, each rated for 25 ton dynamic and 50 ton static load
- Axles: Axle set with air suspension and disc brakes, each rated at 9 or 10 ton
- Rims: 14,00 or 11,75 x 22,5
- Tyres: 425 or 385 /65 R 22,5
- Brake system: 2S2M EBS brake system with RSP, compliant with ECE R 13
- Electrical system: ADR electrical set compliant with ECE R 105
- Bumper: Compliant with ECE R 58

PAINT

- Passivation carried out after pickling inside the tank prevents bacterial growth and chemical corrosion,
- The tank exterior is painted with at least 2 coats of epoxy primer,
- The finish is an oven-cured paint process with 2 coats of acrylic paint,
- Advanced technical equipment provides a homogeneous distribution over every point of the shell and a varnish-gloss surface finish.
- BARLAS reserves the right to make changes to its products. The technical data given are approximate values based on the standard product configuration. Dimensions may vary depending on the truck make and model. The information above does not constitute an offer. Please contact us for further product details.

Milk Tanker Chassis



CHASSIS

- High-strength imported and ST52 grade steel sheet is used for the chassis main sheet (web plate – main beam), the upper and lower flange plates and all cross members. The chassis is robot-welded in an I-section form.

BODY

- High-strength imported steel sheets, resistant to wear and impact, are used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKE SYSTEM

- WABCO or KNORR-BREMSE brand 2S-2M EBS system with RSS.

RUNNING GEAR

- Domestic drum-braked axle set with air suspension and 70 single-leaf springs, 3x9 or 3x12 ton capacity.
- 6 tyres sized 385x65xR22,5 in a brand selected by Barlas, with rims matching these tyres.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical landing legs
- 1 tubular spare wheel carrier
- 1 chock holder and chock
- 2 cabinets
- The vehicle has 1 fire extinguisher cabinet
- 1 water tank
- 6 plastic full mudguards
- 1 tonnage gauge

STANDARD FEATURES

- Manual lift and brake cut-off for the 1st axle

OPTIONS

- Disc-braked axles
- Aluminium rims
- Container locks
- Landing leg
- King pin

Vacuum Tanker



DIMENSIONS

- Width: max. 2.550 mm.
- Height: max. 3.800 mm. *
- Axle spacing: 1.310 mm *
- King-pin height: 1.250 mm *
- Tare weight: 7.200 ~ 9.750 kg *

CAPACITY

- Geometric volume: 28.000 ~ 30.000 l. *
- Number of compartments: 1 *

TANK

- Tank code: L4BH
- Tank class: Class 3, 9
- Construction material series: Stainless steel
- Products carried: UN 3082 (environmentally hazardous substance, liquid)
- Operating temperature: -20 °C +250 °C
- Certification: ADR – (Tüv) / Germany KBA
- Varies according to the selected product type and optional equipment.

TANK SHELL

- Cylindrical cross-section, designed in compliance with the EN 14025 design standard,
- One external dished end at the front and one at the rear; surge baffles inside the tank compliant with the EN 14025 design standard,
- ISO 3834 welded fabrication quality approval is held,
- A unique tank shell in the tanker manufacturing sector: the cylindrical shell is built from transversally seamless one-piece plates joined using the longest-weld-seam technology, with the minimum number of junction (T) points and a safe, smooth and even surface,
- Continuous, high-performance robotic welding technology minimises stress effects on the shell and welding defects caused by the human factor, making the shell safe against impacts and collisions,
- The slope built into the chassis design ensures complete discharge with no liquid remaining in the tank,
- Safety against expansion and overflow is provided by an air gap (ullage).

FILLING LINE

- Top filling is carried out through a manhole cover with a DN 500 filling opening,

DISCHARGE LINE

- Free gravity or pneumatically driven pressurised discharge through EN 14025-compliant, insulated discharge piping located at the rear of the tank, running from the heat-resistant, manually handwheel-operated footvalve to the safety-providing 3-speed shut-off coupling, with a slope that leaves no liquid in the line after discharge,
- At the outlet end of the shut-off coupling there is a drip cup with a drain to collect liquid runoff occurring after discharge,
- Discharge pipes welded to imported patented elbows, holding ISO 3834 welded fabrication quality approval.

CHASSIS

- Special-design half chassis matched to the shell design, providing anti-rollover safety, with the shell bracket connections bolted to the chassis
- The chassis structural components fit together in perfect alignment,
- Fabrication is carried out by certified welders using synergic welding machines under ISO 3834 welded fabrication quality approval,

CHASSIS EQUIPMENT

- King-pin: Component type-approved to ECE R 55, 2", removable and refittable from below
- Landing legs: Two-speed trailer landing legs, each rated for 25 ton dynamic and 50 ton static load
- Axles: Axle set with air suspension and disc brakes, each rated at 9 ton
- Rims: 11,75 x 22,5 /0 ~ 120 offset
- Tyres: 385/65 R 22,5
- Brake system: 2S2M EBS brake system with RSP, compliant with ECE R 13
- Electrical system: ADR electrical set compliant with ECE R 105
- Bumper: Compliant with ECE R 58
- BARLAS reserves the right to make changes to its products. The technical data given are approximate values based on the standard product configuration. Dimensions may vary depending on the truck make and model. The information above does not constitute an offer. Please contact us for further product details.

02 Silo Trailers

Tipping, V-type, W-type and vacuum silo trailers for powder and granular loads.

9 PRODUCTS · 22 MODELS



2.1 Tipping Silo Trailer

2.3 Liquid Fertiliser Silo Trailer

2.4 Flour and Food Silo Trailer

2.5 V-Type Wheat Silo Trailer

2.6 V-Type Silo Trailer

2.7 V-Type Flour and Food Silo Trailer

2.8 Vacuum Silo Trailer

2.9 W-Type (Millennium) Silo Trailer

2.10 Feed Silo Trailer

Tipping Silo Trailer



MODELS (4)

Tipping Silo Tanker

Tipper-Type Silo Trailer

Tipping Silo Semi-Trailer

Tipping Silo

Technical specifications below refer to the **Tipping Silo Tanker** model; please request a quote for the other models.

TIPPING SILO TRAILER BODY TYPE

Silo trailer volumetric capacity

- Production is carried out in the 28-50m³ volume range according to customer order.

Body material grade

- High-strength ST52 or Strenx brand Swedish steel is preferred for the body material.

Payload

- Thanks to the lightweight body, payload capacity reaches maximum values.

Body type

- The cylindrical body is manufactured by certified, expert welders.

Working pressure

- The silo trailer operates at a working pressure of 2 bar and a test pressure of 3 bar.

Chassis

Axle configuration

- The vehicle has a 3-axle chassis configuration.

Materials

- High-strength chassis steel and cross members are used in accordance with EEC directives.

Manufacturing

- An optical laser measuring device is used in chassis assembly to ensure accurate, flawless chassis fabrication.

Assembly method

- The trailer brackets are mounted onto the chassis flange using the staggered fabrication method and welded.

Suspension & axle

Suspension

- An air-bellows, single/double-leaf Z-spring system is preferred for the suspension.

Front axle

- The front axle lift control is located in the tractor cab.

Number of axles

- A drum or disc brake axle system with 3 x 9 Ton carrying capacity is used.

Axle brands

- Sertel, Pirlanta etc. (domestic) / BPW, SAF (imported) (choices are optional).

Brake system

- A WABCO 2S-2M EBS + RSS system is installed in accordance with UN/ECE regulation ECE R13.

HYDRAULIC SYSTEM FEATURES

Tipping movement

- Tipping is performed by a HIDROMAS brand 5-stage heavy-duty telescopic cylinder providing a 45° angle.

Pneumatically controlled

- The tipper is pneumatically controlled and equipped with a two-speed lowering valve and limit control safety.

Intermediate connection

- The connection between tractor and trailer is established via 2 jacks. Installation uses a PTO suited to the customer's vehicle.

Technical specifications

Electrical system

- SA-BA (Varroc) brand, 2x7 & 1x15 pole connections compliant with UN/ECE regulation ECE R48, plus a socket compliant with ISO 12098.

King-pin

- A 2" bolted king-pin in DIN 74080 quality, compliant with ECE R55, is preferred.

Landing legs

- OMS/GOS brand geared landing legs with single-side crank, two-speed operation, 24 ton dynamic and 50 ton static load capacity are used.

Tyres and rims

- R22.5 x 385/65 PIRELLI R179 tyres with 11.75 x 22.5 steel rims are preferred; fitting complies with regulation EU/458/2011.

Paint

- After shot blasting, all metal surfaces receive 2 coats of epoxy primer, followed by 2 coats of acrylic paint in the requested RAL code.

Marking and labels

- The vehicle carries the mandatory plate compliant with regulation EU/19/2011, rear reflectors, reflective strips, speed markings and warning labels.

Filling system features

Pressure vessels

- Filling is performed through DN 400 - DN 500 diameter manhole covers designed and manufactured in accordance with the 97/23/EC Pressure Equipment Directive.

Top filling covers

- The top filling covers are equipped with 3 butterfly-bolt clamps.

Discharge system features

Pressure vessels

- After the tipper is raised to a 45° angle, air is fed into the vessel by the compressor.

Discharge

- When the pressure gauge reads 2 bar, the 4" ball valve on the rear cover of the tipping silo trailer is opened, transferring the product out of the vessel.
- This starts the discharge of the product inside the tipping silo trailer.

- Glycerine-filled pressure gauge


OPTIONAL FEATURES

- JOST landing legs
- JOST king-pin
- ALCOA aluminium rims
- ASPÖCK electrical set
- WABCO SMARTBOARD / e TASC
- Middle axle lift system
- Pneumatically folding top walkway platform (h:1100 mm)
- PVC pipe housing for the 4" discharge hose
- Custom adhesive livery applied to the silo trailer body

STANDARD ACCESSORIES

- Folding rear bumper compliant with ECE R58 UN/ECE
- Cycle guards compliant with ECE R73 UN/ECE
- SEL brand 4" flanged discharge hose
- Mudguards
- Lockable 80 Lt. capacity storage cabinet
- Wheel chock
- Rear bumper mud flap
- Water tank
- Fire extinguisher cabinet
- SA-BA (Varroc) electrical set
- Spare wheel carrier
- Wheel nut wrench & handle
- Rear access ladder
- 2" relief valve rated for 4 bar pressure

Liquid Fertiliser Silo Trailer

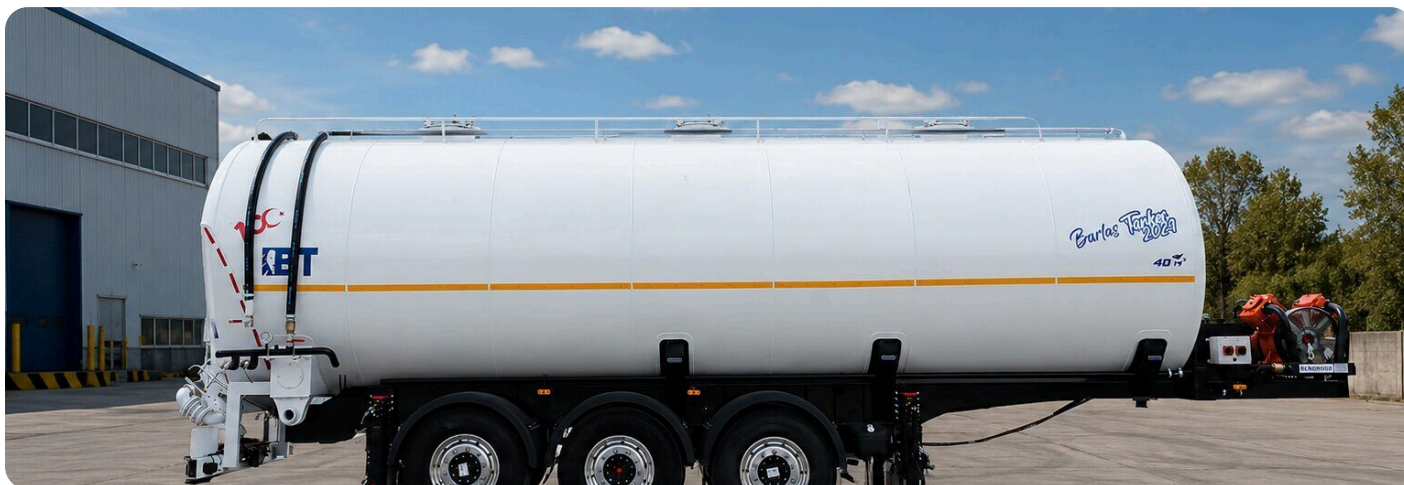

DESCRIPTION

- Purpose-designed solution for the agricultural sector for liquid fertiliser transport.

CAPACITY

- 20-45 m³

LENGTH

- 8.500-12.500 mm

WIDTH

- 2.450-2.550 mm

HEIGHT

- 3.700-3.900 mm

WEIGHT

- 6.500-9.500 kg ±5%

WORKING PRESSURE

- 1.5 BAR

TEST PRESSURE

- 2.5 BAR

TEMPERATURE

- -20°C / +60°C

Flour and Food Silo Trailer



DESCRIPTION

- High-capacity, reliable silo trailer solution designed specifically for the flour industry.

CAPACITY

- 30-55 m³

LENGTH

- 9.000-11.000 mm

WIDTH

- 2.450-2.550 mm

HEIGHT

- 3.800-3.950 mm

WEIGHT

- 7.000-8.500 kg ±5%

WORKING PRESSURE

- 2 BAR

TEST PRESSURE

- 3 BAR

TEMPERATURE

- -40°C / +80°C

V-Type Wheat Silo Trailer



Vessel

- The V-type bottom-discharge vessel is manufactured from stainless ST 37 A1 grade sheet.
- Two large covers suitable for single-closure wheat filling are located on the vessel.

Chassis

- Designed according to international transport norms for trouble-free carriage under full load in all ground conditions.
- Verified through FEA analysis and calculations performed to suit the vehicle superstructure.
- Manufactured from high-strength steel, with overloads also taken into account in the strength calculations.

Air compressor

ELECTRIC AIR COMPRESSOR IS PROVIDED

Suspension and axle system

- Axles with 3x12 ton carrying capacity
- Air suspension system
- EBS brake system designed to European standards

Landing legs

- Two-speed mechanical landing leg system with 25 ton lifting capacity and 50 ton carrying capacity

Tyres

- 385/65 R22,5, 6+1 pcs

Rims

- 6+1 steel rims, size 11,75*22,5

King-pin

- The 2" king-pin complies with SAE / DIN norms and is made of forged steel (42Cr Mo4) highly resistant to tensile failure; bolted connections allow practical replacement.

Electrical system

- 24 V electrical installation compliant with EU standards.
- Multi-compartment tail lamps including fog lamp and reversing lamp are fitted on the vehicle.
- 1 ABS socket and 2 electrical sockets are provided.

Walkway

- Single-side anti-slip walkway running along the left side of the vessel
- Pneumatically operated handrail system controlled from below
- Ladder mounted at the rear of the vehicle providing access to the top of the vessel

Standard accessories

- 4" discharge system
- 6 m discharge hose with its housing
- 1 safety valve set to 2 bar
- 2 underbelly cabinets at the front and rear of the vehicle
- 1 toolbox
- 1 plastic water tank
- 1 wheel chock
- Separate mudguard for each tyre

Options

- Capacity
- Compressor
- Number of manhole covers

Paint

- The vehicle is cleaned with water and chemical mixtures; after shot blasting, two coats of primer are applied and the vehicle is oven-painted in the requested RAL code.

V-Type Silo Trailer



MODELS (3)

V-Type Silo Trailer

V-Type Steel Cement Silo Trailer

V-Type Horizontal Silo Semi-Trailer

Technical specifications below refer to the **V-Type Silo Trailer** model; please request a quote for the other models.

DESCRIPTION

- Silo trailer offering the most preferred classic V design together with a wide range of capacity options.

CAPACITY

- 25-62 m³

LENGTH

- 8.000-12.000 mm

WIDTH

- 2.450-2.550 mm

HEIGHT

- 3.600-3.950 mm

WEIGHT

- 5.250-8.500 kg ±5%

WORKING PRESSURE

- 2 BAR

TEST PRESSURE

- 3 BAR

TEMPERATURE

- 40°C / +80°C

GENERAL FEATURES

- Combining the advantages of the classic V design with modern technology, the V-type silo trailer is offered with GLOBALTECH/BEKOMSAN compressor options. Different options are available in the 25-62 m³ capacity range.

CHASSIS

- High-strength imported and ST52 grade sheet is preferred for the chassis main plate (web plate – longitudinal member), upper and lower flanges and all cross members. The chassis is robot-welded in I-section form.

BODY

- Wear- and impact-resistant, high-strength domestic and imported sheets are preferred in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKE SYSTEM

- WABCO or KNORR-BREMSE brand 2S-2M EBS system with RSS.

RUNNING GEAR

- Air-suspended domestic drum-brake axle set with 70 single-leaf springs and 3x9 or 3x12 ton capacity.
- 6 tyres sized 385x65xR22,5 in a brand selected by Barlas, with matching rims.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical parking legs
- 1 tubular spare wheel holder
- 1 chock holder and chock
- 2 cabinets
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- 6 plastic full mudguards
- 1 load gauge

STANDARD FEATURES

- Top walkway platform and ladder made of perforated sheet
- 6 single-wheel FRP mudguards
- 1 spare wheel carrier
- Plastic 45 lt water tank
- SEL brand 4" flanged discharge hose (1 pc x 6 metres)
- Yellow wheel chock
- Fire box
- Load gauge
- Reverse warning and fog lamp
- Rear bumper compliant with ECE R58 UN/ECE
- Cycle guards compliant with ECE R73 UN/ECE
- Upper air line used for cleaning the silo trailer
- Spare top cover gasket set

COMPRESSOR

- Domestic brand, electric-motor-driven 3-piston / 2-piston compressor set.

OPTIONS

- 3rd filling cover
- Different compressor brand
- European axle

V-Type Flour and Food Silo Trailer



MODELS (2)

V-Type Silo Tanker

V-Type Flour and Food Silo Trailer

Technical specifications below refer to the **V-Type Silo Tanker** model; please request a quote for the other models.

Trailer dimensions for the V-type silo trailer

- Overall length: 8000 mm - 13600 mm
- Silo trailer capacity (volume): 20 m³ - 60 m³
- Width: 2400 mm - 2550 mm
- Overall height: 3600 mm - 4000 mm
- Electrical installation: Materials used are EEC 24 certified and comply with European norms.
- Landing legs: 2 X 24 ton capacity, two-speed mechanical legs.
- Paint: 2 coats of epoxy primer with 2 final coats of acrylic paint are used.
- King-pin: 2" or 3,5" flanged, bolted; highly resistant to tensile failure.
- Made of forged steel.
- Bolted connections allow practical replacement.
- E-certified.

Technical specifications

- Trailer capacity: 25,500 kg for 3 axles (maximum laden weight)
- Silo trailer type: (BRL2) - 3-axle silo semi-trailer

Silo trailer tare weight (empty)

- 4500 kg - 6000 kg for aluminium trailers
- 6500 kg - 9500 kg for metal trailers
- Number of axles: 3 x 12 Ton (domestic) - 3 x 12 Ton (European)
- Tyre count and size: 6 pcs (385/65 R 22,5)

Body (tank) materials

Chassis

- The silo semi-trailer is manufactured from steel (ST-53) with strength matched to its carrying capacity.
- Production is carried out with synergic gas-shielded welding machines.


Body (tank) material

- 3 mm is generally used to save weight.
- For heavy-tonnage operating conditions, 4mm should preferably be applied.

Aluminium silo trailer

- For silo trailers produced from aluminium: 5083 H111 - aluminium silo trailer
- 5083H111 offers very good corrosion resistance and is widely used in the automotive sector, chemical equipment, storage tanks, pressure vessels, silo semi-trailers and the defence industry.
- Brakes: Air brake system, automatic slack adjusters, Wabco EBS brake system (4S/2M), Bekomsan brand Esinti 72, Esinti 102 compressor system.
- Manhole covers and filling: Designed for top filling, with 2 or 3 manhole covers according to volume.
- Accessories: Mudguards (plastic), water tank, plastic toolbox, pressure gauge (indicates suspension bellows pressure and enables load estimation), aluminium cycle guard, fire extinguisher cabinet, wheel chock.

Vacuum Silo Trailer

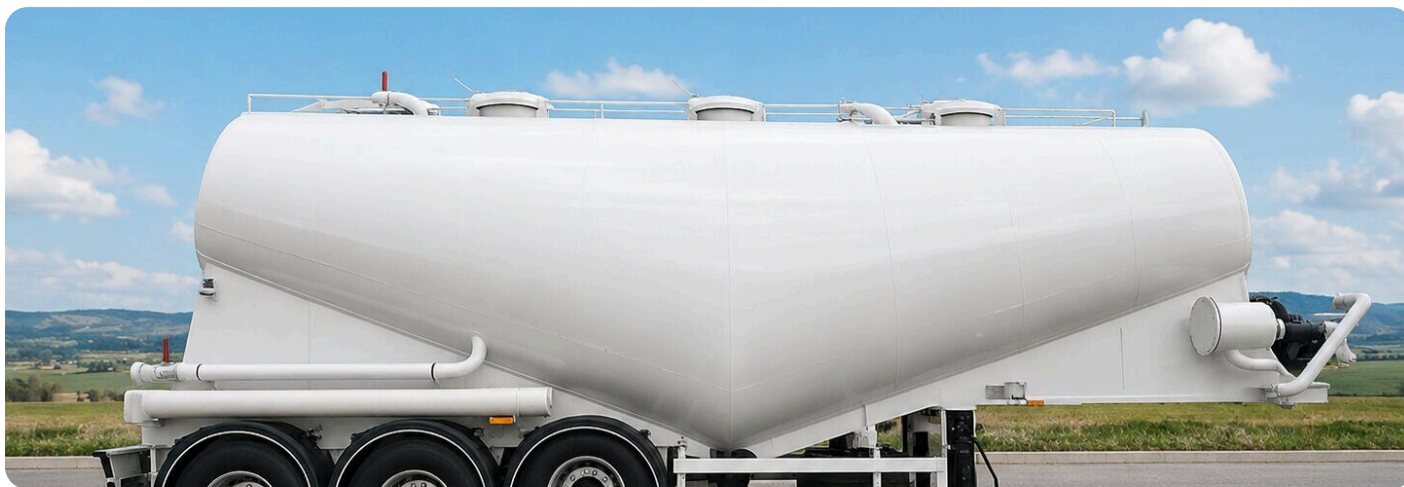

DESCRIPTION

- This purpose-designed silo trailer offers environmentally friendly and effective discharge thanks to vacuum technology.

CAPACITY

- 28-38 m³

LENGTH

- 10.300-11.000 mm

WIDTH

- 2.550 mm

HEIGHT

- 3.800-3.950 mm

WEIGHT

- 8.000-9.000 kg ±5%

WORKING PRESSURE

- 2 BAR

TEST PRESSURE

- 3 BAR

TEMPERATURE

- -40°C / +80°C

W-Type (Millennium) Silo Trailer



MODELS (6)

W-Type Silo Semi-Trailer

W-Type (Millennium) Silo Trailer

W-Type Aluminium Silo Trailer

W-Type Steel Silo Trailer

W-Type Horizontal Silo Semi-Trailer

Millennium Silo Trailer

Technical specifications below refer to the **W-Type Silo Semi-Trailer** model; please request a quote for the other models.

W-TYPE SILO SEMI-TRAILER DIMENSIONS

- Overall length: 8000 mm. - 13600 mm.
- Silo trailer capacity (volumetric): 35 m3
- Overall height: 3600 mm - 4000 mm
- Electrical installation: SA-BA (Varroc)
- Landing legs: OMS
- Paint: coats of epoxy primer, two final coats of acrylic paint (the vehicle is painted in the requested RAL code; the RAL code must be specified at the time of order; vehicles without a specified code are painted in RAL:9010)
- King-pin: 2" flanged, bolted, highly resistant to tensile failure,
- made of forged steel; the bolted connection provides practical

TECHNICAL SPECIFICATIONS

- Trailer capacity: 25.500 Kg for 3 axles (maximum laden weight)
- Silo trailer type: (BRL-2) - 3-axle W-type silo semi-trailer
- Silo trailer tare weight (empty): 4500-8000 Kg
- Number of axles: 3 axles - 3 x 9 Ton (SAF HOLLAND)
- Axle: SAF Holland
- Suspension system: SAF Holland
- Tyre count and size: 6 pcs (385/65 R 22,5) (LASSA)
- Rim count and size: 6 pcs (R22,5) (JANTSA)

BODY (TANK) MATERIALS

- Chassis - body: the silo semi-trailer is manufactured from 5083 series H111 grade aluminium

SHEET

- Brakes: WABCO brand EBS, air brake system
- Discharge system: Bekomsan brand Esinti 102 model (two-head compressor)
- Discharge is performed from the bottom via an air-operated pinch valve
- Manhole covers and filling: 2 pcs of 50 cm ADR-compliant covers according to volume,
- PEKERSAN brand, designed to allow top filling
- Accessories: Mudguards (plastic), water tank, plastic toolbox,
- pressure gauge (indicates suspension bellows pressure and enables load estimation),
- fire extinguisher cabinet, aluminium cycle guard, wheel chock
- Optional products: Pneumatic lifting platform, Aspöck electrical system,
- metal food cabinet, aluminium rims, 1 spare wheel

Feed Silo Trailer



MODELS (3)

Semi-Trailer-Mounted Feed Silo

Truck-Mounted Feed Silo

Trailer-Mounted Feed Silo

Technical specifications below refer to the **Semi-Trailer-Mounted Feed Silo** model; please request a quote for the other models.

DIMENSIONS

- Width: max. 2.550 mm
- Height: max. 3.950 mm

CAPACITY

- Geometric volume: 40 - 50 m³
- Discharge hoppers: 3 ~ 5

GENERAL FEATURES

- Category: 8
- Products carried: Poultry feed, pellet feed, bran, maize, barley, wheat, feed and similar bulk grains and powdered foodstuffs, etc.
- Operating temperature: -20 °C / +50 °C
- Certification: Machinery Safety Directive (2006/42/EC)
- Varies according to the selected product type and optional equipment.

BODY

- Elliptical cross-section design in high-strength, imported, special-alloy ST52 material.
- A unique body structure specific to silo trailer production: circular, seamless, with one-piece plates meeting inside the chassis at the lower body centre and their weld joints executed by certified welders using a special welding method, resulting in a safe body with a smooth, even surface.
- Holds ISO 3834 welded fabrication quality approval.
- Continuous, high-performance robotic welding technology minimises stress effects on the body and welding errors caused by the human factor, making the body safe against impacts and collisions.
- The W-angle body design prevents material remaining inside and enables fast discharge with a single (optionally double) auger system.

FILLING LINE

- Top filling is performed via filling covers that open horizontally on a rail system, hinged to the filling cover neck formed integrally with the body.

DISCHARGE LINE

- Two separate discharge systems, from the top or the bottom, depending on the silo position.
- Top discharge is performed from manually opened discharge gates in each compartment, transferring in sequence to independently operating horizontal augers, the vertical auger and the upper discharge pipe; when top discharge is disabled, bottom discharge is used.

ELECTRICAL COMPONENTS

- 120 x 60 sheet-steel panel (1 pc).
- Contactors connected to the motors.
- Motor protection thermal relays.
- 8-way control unit (with emergency stop).
- Electrical cables connecting these components.
- Our products comply with TSE standards.
- ABB or Schneider brand equipment.

HYDRAULIC COMPONENTS

- 350 lt hydraulic motor for the rotating auger.
- 2 x 1 valve.
- 6 lt HEMA pump.
- Oil filter.
- 2 HP 1400 rpm motor.
- 80 x 50 lift.
- Hydraulic pump unit; transmits drive to the hydraulic motor, powering its operation and the left-right and up-down movement of the discharge pipe.

CONTROL PANEL AND HYDRAULIC CONTROL UNIT

- Control panel prepared for controlling the augers, the connected motors and the hydraulic unit system.

PAINT

- At least 2 coats of epoxy primer are applied.
- The final coat is applied as 2 coats of acrylic paint.
- Note: BARLAS reserves the right to make changes to its products. Technical information is approximate and refers to the standard product application. Dimensions may vary according to truck make and model. The information above does not constitute an offer. For further details about the product, please contact the company.

03 Tippers

High-strength tipper bodies for construction, mining and agriculture — from grain to rock-type.

9 PRODUCTS · 16 MODELS



3.1 Accordion Grain-Type Tipper

3.3 Half-Pipe / Tub Tipper

3.5 Truck-Mounted Tipper

3.6 Tipper with Side/Tail Boards

3.7 Rock-Type Tipper

3.8 Multi-System Tipper

3.9 Panel-Type Tipper

3.10 Side-Tipping Tipper

3.11 Half-Pipe Tipper

Accordion Grain-Type Tipper



- Note: According to the current technical documentation, the technical specifications of the Scrap-Type Tipper and Accordion Grain-Type Tipper models are identical to those of the Rock-Type Tipper model. In the reviewed content there are no differences in technical specifications, standard features, hydraulic system or options.

Half-Pipe / Tub Tipper



MODELS (4)

Half-Pipe Tipper

18m³ Half-Pipe Tipper30m³ Half-Pipe Tipper

Tub (Half-Pipe) Tipper

Technical specifications below refer to the **Half-Pipe Tipper** model; please request a quote for the other models.

Chassis

- Designed to international transport standards for trouble-free carriage under full load on all types of ground conditions. Overloading is also taken into account in the strength calculations. The chassis consists of two high-strength steel bodies with an "I" cross-section and is manufactured using submerged-arc welding technology.

Suspension and axle system

- Axle with 3x12 ton load capacity
- Air suspension system
- EBS brake system designed to European standards

Landing legs

- Two-speed mechanical landing leg system with 25 ton lifting capacity and 50 ton load capacity

Tyres

- 385/65 R22,5, 6+1 units

Rims

- 6 + 1 steel rims, size 11,75*22,5

KING-PIN

- The 2" king-pin complies with SAE / DIN standards and is made of forged steel (42Cr Mo4) highly resistant to stress and breakage; it can be replaced easily thanks to its bolted connections.

Electrical system

- 24 V electrical installation compliant with EU standards.
- Multi-compartment tail lamps including fog lamp and reversing lamp are fitted on the vehicle.
- 1 ABS socket and 2 electrical sockets are provided.

Standard accessories

- 1 toolbox
- 1 plastic water tank
- 1 fire extinguisher cabinet
- 1 wheel chock
- Separate mudguard for each tyre

Options

- Capacity
- Upper body specifications

Paint

- After cleaning with water and chemical mixtures, the vehicle is shot blasted; following a double primer coat, it is painted in a special oven to the requested RAL code.

Truck-Mounted Tipper



DIMENSIONS

- Width: 2.550 mm
- Height: 3.020 mm
- Tare weight: 6.200 ~ 8500 kg. ± 5% (varies according to the selected equipment)

CAPACITY

- Loading volume: 14 – 16 – 18 – 20 – 22 – 24 – 26 m3

TIPPER

- Products carried: Aggregate and excavation-type materials, all solid-phase bulk loads
- Certification: CE certificate in accordance with Machinery Directive 2006/42/EC

TIPPER BODY

- Half-pipe cross-section, high-performance design compatible with loading and unloading conditions,
- Wear- and impact-resistant, high-strength imported steel material,
- ISO 3834 welded fabrication quality certification is held,
- Long-lasting, safe, high-strength, unique body structure obtained by lap-mounting the side walls — with an increased number of bends — onto the inner side of the floor plate produced from a single wear-resistant plate, and joining them longitudinally inside and outside with continuous, flawless welding,
- Strong, inclined front wall with joints forming an integral whole with the floor and side wall plates, distributing the lifting force of the hydraulic cylinder from its bearing point to the body via support profiles,
- Transverse and longitudinal support profiles under the body that reinforce the floor plate,

- Durable, inclined, safe, freely opening and closing tailgate, reinforced around its perimeter with support profiles, hinged at the top to the side wall U-supports, with a bottom locking mechanism preventing unintended opening,
- Convex, specially designed BARLAS MAXI tailgate with "TPE Utility Model Registration", increasing the existing carrying volume by a further ~1,5 m3, reducing wear on the inner surface of the tailgate during discharge and providing a wider discharge area (optional),
- Hydraulically operated tailgate mechanism that opens and closes automatically, controlled from inside the driver's cab (optional),
- Fixing tipping shaft bedded on the chassis, joining the body and the chassis,
- Steel mudguards welded to the body, protecting the truck tyres and undercarriage against load spillage.

HYDRAULIC SYSTEM

- 3 ~ 4 stage hydraulic cylinder providing the maximum tipping angle,
- Pressure-resistant oil tank with filter and vacuum safety, sized to suit the hydraulic system,
- Hydraulic pump coupled to the PTO, delivering high pressure and flow suited to the system,
- Directional control valve routing the system's pressure line,
- Hydraulic hoses and fittings resistant to high pressure and flow.

AUXILIARY CHASSIS

- Specially designed auxiliary chassis in box-profile form made of "NPU" steel, rigidly adaptable to any truck chassis, providing tipping stability, compatible with the body design, reinforced with intermediate cross members and rear diagonal support connections,
- Spring connections and mounting brackets are located at the points where the auxiliary chassis is mounted to the vehicle chassis; they distribute forces arising from road conditions and reduce stress,
- The parts forming the chassis construction are manufactured in perfect harmony by certified welders using synergic welding machines under ISO 3834 welded fabrication quality certification.


CHASSIS EQUIPMENT

- Mud flaps: Component type-approved anti-spray mud flaps in accordance with Regulation 109/2011/EU
- Side protection: Protective equipment in accordance with ECE R 73 (cycle guard etc.)

PAINT

- Painting is carried out with at least 2 coats of epoxy primer,
- As the top coat, 2 coats of acrylic paint with "OVEN-CURED PAINT" application,
- Thanks to advanced technical equipment, homogeneous distribution over every point of the body and a varnish-gloss surface finish are achieved.
- BARLAS reserves the right to make changes to its products. Technical data are approximate values and refer to the standard product version. The above information does not constitute an offer. For further details about the product, please contact us.

Tipper with Side/Tail Boards

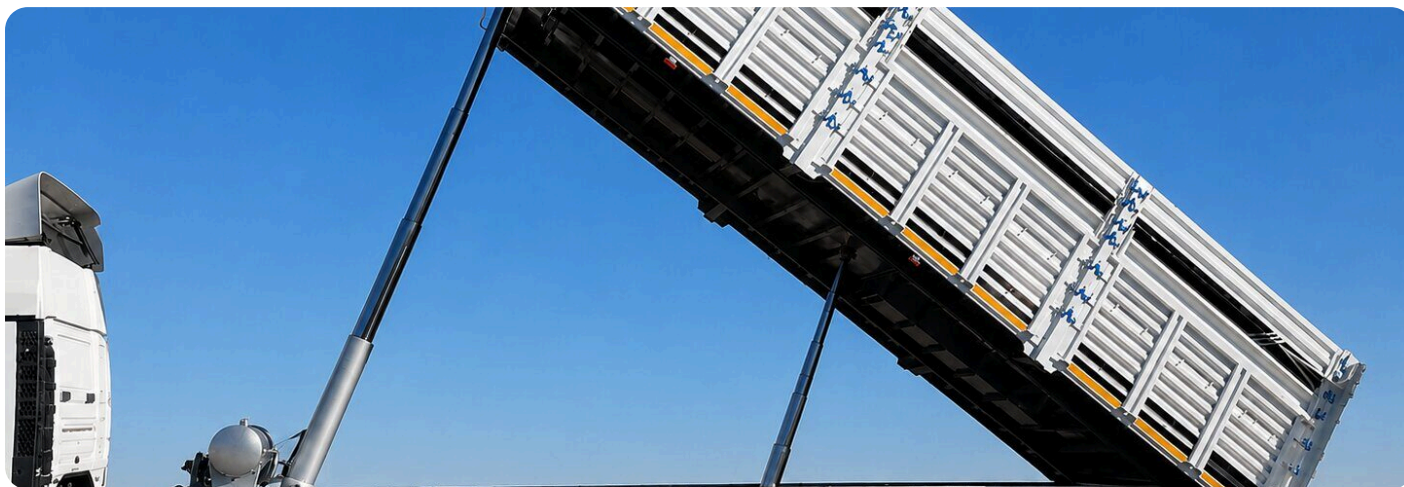

MODELS (4)

8.30 Tipper with Side/Tail Boards

Tipper with Side-Opening Boards

8.60 Tipper with Side/Tail Boards

Tipper with Side/Tail Boards

Technical specifications below refer to the **8.30 Tipper with Side/Tail Boards** model; please request a quote for the other models.

CHASSIS

- High-strength imported and ST52 grade sheet steel is used for the chassis main plate (web plate – longitudinal member), the upper and lower flanges and all cross members. The chassis is robot-welded in an I-section form.

BODY

- Wear- and impact-resistant, high-strength imported sheet steel is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKE SYSTEM

- WABCO or KNORR-BREMSE 2S-2M EBS system with RSS.

RUNNING GEAR

- Domestically produced drum-brake axle set with air suspension, 70 single-leaf springs and 3x9 ton capacity.
- 6+1 tyres of the preferred brand, size 385x65xR22,5, with matching rims.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical landing legs
- 1 tube-type spare wheel carrier
- 1 wheel chock and chock holder
- 2 storage cabinets
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- 6 plastic full mudguards
- 1 tonnage gauge

STANDARD FEATURES

- Manual lift and brake cut-off for the 1st axle

HYDRAULIC SYSTEM

- 5-stage telescopic cylinder
- Dual-speed valve
- Limit control valve
- Oil tank
- Hoses and fittings for the hydraulic installation
- Air installation with air-controlled switch inside the cab

OPTIONS

- Prevention of vehicle movement by automatic braking while the tipper body is raised
- European drum-brake and disc-brake axles
- PTO installation
- Aluminium rims
- Tarpaulin system

Rock-Type Tipper



MODELS (2)

Rock Tipper

Rock-Type Tipper

Technical specifications below refer to the **Rock Tipper** model; please request a quote for the other models.

Chassis

- Designed to international transport standards for trouble-free carriage under full load on all types of ground conditions. Overloading is also taken into account in the strength calculations. The chassis consists of two high-strength steel bodies with an "I" cross-section and is manufactured using submerged-arc welding technology.

Suspension and axle system

- Axle with 3x12 ton load capacity
- Air suspension system
- EBS brake system designed to European standards

Landing legs

- Two-speed mechanical landing leg system with 25 ton lifting capacity and 50 ton load capacity

Tyres

- 385/65 R22,5, 6+1 units

Rims

- 6 + 1 steel rims, size 11,75*22,5

KING-PIN

- The 2" king-pin complies with SAE / DIN standards and is made of forged steel (42Cr Mo4) highly resistant to stress and breakage; it can be replaced easily thanks to its bolted connections.

Electrical system

- 24 V electrical installation compliant with EU standards.
- Multi-compartment tail lamps including fog lamp and reversing lamp are fitted on the vehicle.
- 1 ABS socket and 2 electrical sockets are provided.

Standard accessories

- 1 toolbox
- 1 plastic water tank
- 1 fire extinguisher cabinet
- 1 wheel chock
- Separate mudguard for each tyre

Options

- Capacity
- Upper body specifications

Paint

- After cleaning with water and chemical mixtures, the vehicle is shot blasted; following a double primer coat, it is painted in a special oven to the requested RAL code.

Multi-System Tipper



DIMENSIONS

- Width: max. 2.550 mm
- Height: max. 3.150 mm
- Axle spacing range: 1.300 ~ 1.400 mm *
- King-pin height: 1.250 ~ 1.350 mm *
- Tare weight: 8000 kg. ± 5%

CAPACITY

- Loading volume: 26 – 33 – 40 m3
- Extensions: 1 / 2 / 3 / 4 rows

TIPPER

- Products carried: Aggregate and excavation-type materials, all solid-phase bulk loads and bagged/palletised loads
- Certification: CE certificate in accordance with Machinery Directive 2006/42/EC
- Varies according to the selected product type and optional equipment.

TIPPER BODY

- Square cross-section, high-performance design compatible with loading and unloading conditions,
- Wear- and impact-resistant, high-strength steel material,
- ISO 3834 welded fabrication quality certification is held,
- "NPI" cross members placed transversely on the "NPU" auxiliary chassis arms, spaced evenly and frequently enough to carry the load coming from the body,
- The floor plate, formed from the widest single plate both transversely and longitudinally, is joined to the cross members placed transversely on the auxiliary chassis by method welding in an even, regular manner with flawless welding performance; integrated with skirt plates whose strength is increased by "U"-shaped bending, a long-lasting, safe, high-strength floor is obtained,

- Strong front wall produced from the widest single plate, with strength-enhancing bends, forming an integral whole with the floor and the fixed front supports, distributing the lifting force of the hydraulic cylinder from its bearing point to the body via support profiles,
- Side boards and extensions in equal numbers on the right and left, plus a single tail board and extension — made from the widest single plate, with strength-enhancing bends, preventing outward opening of the boards under load force, supported by supports mounted in fixing sockets, opening and closing on hinge connections,
- Discharge chute (basket) mounted on the tail board, guiding the load during discharge and ensuring homogeneous distribution,
- Unique body structure offering a multi-purpose transport alternative,
- Fixing tipping shaft bedded on the chassis, joining the body to the chassis.

HYDRAULIC SYSTEM

- 5-stage hydraulic cylinder providing the maximum tipping angle,
- Pressure-resistant oil tank with filter and vacuum safety, sized to suit the hydraulic system,
- Hydraulic pump coupled to the PTO, delivering high pressure and flow suited to the system,
- Directional control valve routing the system's pressure line,
- Hydraulic hoses and fittings resistant to high pressure and flow.

CHASSIS

- Full chassis of specially designed, high-strength steel, produced with robotic welding technology, "I" cross-section, reinforced with intermediate cross members, flexible against torsion and bending, providing tipping stability, compatible with the body design,
- Mounting brackets on the chassis side member that distribute forces transmitted from road conditions to the running gear and reduce stress,
- The parts forming the chassis construction are manufactured in perfect harmony by certified welders using synergic welding machines under ISO 3834 welded fabrication quality certification.

CHASSIS EQUIPMENT

- King-pin: Component type-approved in accordance with ECE R 55, 2", removable and refittable from below,
- Landing legs: Two-speed trailer support legs, each with 25 ton dynamic and 50 ton static load capacity,
- Axles: Axle set, each axle with 9 ~12 ton capacity, mechanical or air suspension, drum or disc brakes
- Rims: 11,75 x 22,5
- Tyres: 385/65 R 22,5
- Brake system: EBS/ABS brake system with RSP in accordance with ECE R 13
- Electrical system: Electrical set in accordance with ECE R 105
- Bumper: In accordance with ECE R 58

PAINT

- Painting is carried out with at least 2 coats of epoxy primer,
- As the top coat, 2 coats of acrylic paint with "OVEN-CURED PAINT" application,
- Thanks to advanced technical equipment, homogeneous distribution over every point of the body and a varnish-gloss surface finish are achieved.
- BARLAS reserves the right to make changes to its products. Technical data are approximate values and refer to the standard product version. Dimensions may vary depending on the truck make and model. The above information does not constitute an offer. For further details about the product, please contact us.

Panel-Type Tipper



DIMENSIONS

- Width: max. 2.550 mm
- Height: max. 3.500 mm
- Axle spacing range: 1.300 ~ 1.400 mm *
- King-pin height: 1.250 ~ 1.350 mm *
- Tare weight: 7000 kg. ± 5%

CAPACITY

- Loading volume: 26 - 60 m3

TIPPER

- Products carried: Agricultural products, animal feed and similar, all solid-phase bulk loads and bagged/palletised loads
- Certification: CE certificate in accordance with Machinery Directive 2006/42/EC
- Varies according to the selected product type and optional equipment.

TIPPER BODY

- Square cross-section, high-performance design compatible with loading and unloading conditions,
- Imported, special-alloy, high-strength aluminium material,
- ISO 3834 welded fabrication quality certification is held,
- Cross members placed transversely on the auxiliary chassis arms, spaced evenly and frequently enough to carry the load coming from the body,
- Long-lasting, safe, high-strength floor obtained by joining the floor plate — formed from the widest single plate both transversely and longitudinally — to the cross members placed transversely on the auxiliary chassis by method welding in an even, regular manner with flawless welding performance,
- Strong front wall with one-piece special extruded panel profiles, forming an integral whole with the floor and the fixed front supports, distributing the lifting force of the hydraulic cylinder from its bearing point to the body via support profiles,

- Unique, long-lasting, safe, high-strength body structure offering a multi-purpose transport alternative, obtained by lap-mounting the side wall panels — formed by interlocking special extruded profiles — onto the corner angles of the floor plate produced from the widest single wear-resistant plate, and joining them longitudinally inside and outside with continuous, flawless welding,
- Hinged, side-opening side doors made of the same material as the body, easing the loading and unloading of sacks, bags and similar loads without compromising body strength (optional),
- Top-hinged movable partition divider enabling two different materials to be carried and discharged as bulk loads at the same time without mixing (optional),
- Hinged rear door with a 2-leaf combination, made of the same material as the body,
- Grain hatch on the rear door reducing the pressure on the door before discharge (optional),
- Fixing tipping shaft bedded on the chassis, joining the body to the chassis.

HYDRAULIC SYSTEM

- 5-stage hydraulic cylinder providing the maximum tipping angle,
- Pressure-resistant oil tank with filter and vacuum safety, sized to suit the hydraulic system,
- Hydraulic pump coupled to the PTO, delivering high pressure and flow suited to the system,
- Directional control valve routing the system's pressure line,
- Hydraulic hoses and fittings resistant to high pressure and flow.

CHASSIS

- Full chassis of specially designed, high-strength steel, produced with robotic welding technology, "I" cross-section, reinforced with intermediate cross members, flexible against torsion and bending, providing tipping stability, compatible with the body design,
- Mounting brackets on the chassis side member that distribute forces transmitted from road conditions to the running gear and reduce stress,
- The parts forming the chassis construction are manufactured in perfect harmony by certified welders using synergic welding machines under ISO 3834 welded fabrication quality certification.

CHASSIS EQUIPMENT

- King-pin: Component type-approved in accordance with ECE R 55, 2" or 3,5", removable and refittable from below
- Landing legs: Two-speed trailer support legs, each with 25 ton dynamic and 50 ton static load capacity
- Axles: Axle set, each axle with 9 ~12 ton capacity, mechanical or air suspension, drum or disc brakes
- Rims: 11,75 x 22,5
- Tyres: 385/65 R 22,5
- Brake system: EBS/ABS brake system with RSP in accordance with ECE R 13
- Electrical system: Electrical set in accordance with ECE R 105
- Bumper: In accordance with ECE R 58

PAINT

- Painting is carried out with at least 2 coats of epoxy primer,
- As the top coat, 2 coats of acrylic paint with "OVEN-CURED PAINT" application,
- Thanks to advanced technical equipment, homogeneous distribution over every point of the body and a varnish-gloss surface finish are achieved.
- BARLAS reserves the right to make changes to its products. Technical data are approximate values and refer to the standard product version. Dimensions may vary depending on the truck make and model. The above information does not constitute an offer. For further details about the product, please contact us.

Side-Tipping Tipper



CHASSIS

- High-strength imported and ST52 grade sheet steel is used for the chassis main plate (web plate – longitudinal member), the upper and lower flanges and all cross members. The chassis is robot-welded in an I-section form.

BODY

- Wear- and impact-resistant, high-strength imported sheet steel is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKE SYSTEM

- WABCO or KNORR-BREMSE 2S-2M EBS system with RSS.

RUNNING GEAR

- Domestically produced drum-brake axle set with air suspension, 70 single-leaf springs and 3x9 ton capacity.
- 6+1 tyres of the brand selected by Barlas, size 385x65xR22,5, with matching rims.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical landing legs
- 1 tube-type spare wheel carrier
- 1 wheel chock and chock holder
- 2 storage cabinets
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- 6 plastic full mudguards
- 1 tonnage gauge

HYDRAULIC SYSTEM

- 3 telescopic cylinders

STANDARD FEATURES

- Manual lift and brake cut-off for the 1st axle

OPTIONS

- Platform material; 1 row steel sheet - 1 row timber, wear-plate steel sheet
- MDF with forklift tracks
- Inner and outer side boards
- Coil well
- Side tipping
- Disc-brake axles
- Aluminium rims
- Container locks
- Landing leg
- King pin

Half-Pipe Tipper



DIMENSIONS

- Width: max. 2.550 mm
- Height: max. 3.020 mm
- Axle spacing range: 1.300 ~ 1.400 mm *
- King-pin height: 1.250 ~ 1.350 mm *
- Tare weight: 6.200 ~ 8500 kg. ± 5%

CAPACITY

- Loading volume: 22 – 24 – 27 – 32 – 40 – 45 m3

TIPPER

- Products carried: Aggregate and excavation-type materials, all solid-phase bulk loads
- Certification: CE certificate in accordance with Machinery Directive 2006/42/EC
- Varies according to the selected product type and optional equipment.

TIPPER BODY

- Half-pipe cross-section, high-performance design compatible with loading and unloading conditions,
- Wear- and impact-resistant, high-strength imported steel material,
- ISO 3834 welded fabrication quality certification is held,
- Long-lasting, safe, high-strength, unique body structure obtained by lap-mounting the side wall plates — with an increased number of bends — onto the inner side of the floor plate produced from a single wear-resistant plate, and joining them longitudinally inside and outside with continuous, flawless welding,
- Strong, inclined front wall with joints forming an integral whole with the floor and side wall plates, distributing the lifting force of the hydraulic cylinder from its bearing point to the body via support profiles,

- Transverse and longitudinal support profiles under the body that reinforce the floor plate,
- Durable, inclined, safe, freely opening and closing tailgate, reinforced around its perimeter with support profiles, hinged at the top to the side wall U-supports, with a bottom locking mechanism preventing unintended opening,
- Convex, specially designed BARLAS MAXI tailgate with "TPE Utility Model Registration", increasing the existing carrying volume by a further ~1,5 m3, reducing wear on the inner surface of the tailgate during discharge and providing a wider discharge area (optional),
- Hydraulically operated tailgate mechanism that opens and closes automatically and can be controlled from inside the driver's cab (optional),
- Fixing tipping shaft bedded on the chassis, joining the body to the chassis.

HYDRAULIC SYSTEM

- 5-stage hydraulic cylinder providing the maximum tipping angle,
- Pressure-resistant oil tank with filter and vacuum safety, sized to suit the hydraulic system,
- Hydraulic pump coupled to the PTO, delivering high pressure and flow suited to the system,
- Directional control valve routing the system's pressure line,
- Hydraulic hoses and fittings resistant to high pressure and flow.

CHASSIS

- Full chassis of specially designed, high-strength steel, produced with robotic welding technology, "I" cross-section, reinforced with intermediate cross members, flexible against torsion and bending, providing tipping stability, compatible with the body design,
- Mounting brackets on the chassis side member that distribute forces transmitted from road conditions to the running gear and reduce stress,
- The parts forming the chassis construction are manufactured in perfect harmony by certified welders using synergic welding machines under ISO 3834 welded fabrication quality certification.

CHASSIS EQUIPMENT

- King-pin: Component type-approved in accordance with ECE R 55, 2" or 3,5", removable and refittable from below
- Landing legs: Two-speed trailer support legs, each with 25 ton dynamic and 50 ton static load capacity
- Axles: Axle set, each axle with 9 ~12 ton capacity, mechanical or air suspension, drum or disc brakes
- Rims: 14,00 – 11,75 – 9,00 x 22,5
- Tyres: 425 - 385/65 R 22,5 (single) or 315/80 R 22,5 (twin)
- Brake system: EBS/ABS brake system in accordance with ECE R 13
- Electrical system: ADR electrical set in accordance with ECE R 105
- Bumper: In accordance with ECE R 58

PAINT

- Painting is carried out with at least 2 coats of epoxy primer,
- As the top coat, 2 coats of acrylic paint with "OVEN-CURED PAINT" application,
- Thanks to advanced technical equipment, homogeneous distribution over every point of the body and a varnish-gloss surface finish are achieved.
- BARLAS reserves the right to make changes to its products. Technical data are approximate values and refer to the standard product version. Dimensions may vary depending on the truck make and model. The above information does not constitute an offer. For further details about the product, please contact us.

04

Curtainsiders & Tarpaulin Trailers

Curtainsider, tarpaulin and swap body trailers for fast loading and unloading.

5 PRODUCTS · 12 MODELS



4.1 Multi Ride

4.2 Curtainsider Swap Body

4.3 Curtainsider & Tarpaulin

4.5 Light Tarpaulin

4.6 Standard Tarpaulin

Multi Ride



- Model: T.SCS NG MR / 90 - 12 / 27

TECHNICAL DIMENSIONS

- Property: Value
- Fifth wheel height (H5): 1.000 mm (The tyre group where the axle lift is fitted is excluded from warranty coverage against damage.)
- Gooseneck (NH): 90 mm
- Wheelbase (Wb): 7.700 mm
- Net interior height (IH): 2.800 mm
- Exterior length (L): 13.680 mm
- Interior length (II): 13.610 mm
- Vehicle width (W): 2.550 mm
- Interior width (IW): 2.474 mm

TECHNICAL CAPACITY

- Property: Value
- King pin capacity: 12.000 kg
- Axle load: 27.000 kg
- Gross weight: 39.000 kg
- Pallet capacity: Carrying capacity of 34 Euro pallets.

TECHNICAL INFORMATION

- Property: Value
- Chassis: Manufactured from high-quality, high-strength S700 MC steel in compliance with the ISO 1726 standard
- Braking system: Dual-circuit electro-pneumatic EBS 2S/2M braking system compliant with UN ECE R13, incorporating anti-lock (ABS) and roll stability support (RSS) and a voltage supply (24V) through the brake lamp.
- Tyre size: 385/55 R22,5
- Axles: 3 BPW disc-braked axles, each with a technical capacity of 9 tons.
- Electrical system: Aspöck Europoint III
- Floor: 30 mm phenolic resin-coated plywood floor compliant with EN 283 standards, reinforced with omega profiles and rated for a 7.200 kg forklift axle load.
- K-Fix: Load securing points at 70 mm intervals on both sides of the side rave. Each lashing point provides a 2,5 ton capacity and is compatible with all types of lashing straps.
- Front panel type: KTL-coated steel full front panel with 1.220 mm plywood protection lining.
- Roof type: Edscha single-side sliding roof system, openable from the rear
- 2. Light

Curtainsider Swap Body



TECHNICAL DIMENSIONS

- Net interior height (IH): 2.850 mm
- Exterior length (L): 13.715 mm
- Interior length (IL): 13.610 mm
- Vehicle width (W): 2.550 mm
- Interior width (IW): 2.480 mm
- Tare weight $\pm 3\%$: 4.820 kg (+ -3%)
- Height code: C64
- Net interior height (IH): 2.570 mm
- Tare weight $\pm 3\%$: 3.900 kg
- Height code: C45
- Net interior height (IH): 2.530 mm

TECHNICAL CAPACITY

- Gross weight: 34.000 kg
- Pallet capacity: Carrying capacity of 34 Euro pallets

TECHNICAL INFORMATION

- Chassis: Chassis structure made of high-strength S700 MC engineering steel, built from 195 mm high special-section profiles with steel beam connections at the required intervals. Features 45 ft and 40 ft connection points; the front corner fitting is compatible with ISO and winglock connections. ISO gooseneck tunnel dimensions: 4.000 x 1.030 x 120 mm
- Floor: 30 mm phenolic resin-coated plywood floor compliant with EN 283 standards, reinforced with omega profiles and rated for a 7.200 kg forklift axle load
- K-Fix: Load securing system consisting of 49 lashing points per side on the right and left side raves, 98 in total. Each lashing point has a load capacity of 2,5 tons.
- Front panel type: KTL-coated steel full front panel with 2.440 mm plywood protection

- Roof type: Edscha single-side sliding roof system, openable from the rear.
- Chassis: S700 MC
- K-Fix: On the truck-mounted body section, the load securing system consists of 49 holes per side on the side rave, 98 in total. Each lashing point offers a 2,5 ton load carrying capacity
- Pallet stop: 20 mm high pallet stoppers on the right and left side raves
- Roof type: Edscha single-side sliding roof system, openable from the rear
- Front panel type: Aluminium full front panel
- Rear panel type: 2-leaf rear door made of interlocking aluminium profiles, with double concealed locks on each leaf
- Chassis: 330 mm high chassis made of high-strength S700 MC steel, reinforced for intermodal transport. Features a gooseneck tunnel area to which 40 and 45 ft container carriers can be connected. Tunnel dimensions: 3.920 x 1.030 x 120 mm. In accordance with VDI 2700, the coil well is divided by walls into 3 equal sections of 2.150 mm length. At the front and rear of each well section there are 2 stanchion post sockets of 81x81 mm each, 2 x 6 in total. The front and rear coil wells can each be loaded with Ø900-1.600 mm coils of 15 tons, 30 tons in total. The 3 coil wells can each be loaded with Ø900-1.600 mm coils of 10 tons, 30 tons in total. The centre coil well can be loaded with Ø1.400-2.000 mm coils up to a maximum of 30 tons. Additional pads are provided in the centre well section for carrying Ø900-1.400 coils. On both sides of the well section, the floor features 6 lashing rings of 5 ton capacity per side, 2 x 6 in total.
- Floor: Multi-layer plywood floor, 30 mm thick, compliant with EN 283 standards and rated for a 7.200 kg forklift axle load
- Pallet stop: 35 mm high pallet stoppers on the right and left side raves.
- Front panel type: The front panel and its side posts are made of special-alloy aluminium; the panel interior features a 500 mm high aluminium impact plate, and the front right/left corner posts carry lashing rings at 1.000 mm above the floor. A rubber strip on top of the impact plate prevents cargo damage.

Curtainsider & Tarpaulin



MODELS (8)

T.SCL X+ / 150 - 12 / 27

T.SCL M / 150 - 12 / 27

T.SCS NG M / 90 - 12 / 27

T.SCS NG X+ / 90 - 12 / 27

T.SCD M / 90 - 12 / 27

T.SCD X+ / 90 - 12 / 27

T.SCC M / 125 - 12 / 27

T.SCC X+ / 125 - 12 / 27

Technical specifications below refer to the **T.SCL X+ / 150 - 12 / 27** model; please request a quote for the other models.

TECHNICAL DIMENSIONS

- Fifth wheel height (H5): 1.150 mm
- Gooseneck (NH): 150 mm
- Wheelbase (Wb): 7.700 mm
- Net interior height (IH): 2.690 mm
- Exterior length (L): 13.680 mm
- Interior length (II): 13.610 mm
- Vehicle width (W): 2.550 mm
- Interior width (IW): 2.480 mm
- Tare weight $\pm 3\%$: 6.480 kg

TECHNICAL CAPACITY

- King pin capacity: 12 ton technical king pin carrying capacity
- Axle load: 27.000 kg
- Gross weight: 39.000 kg
- Pallet capacity: Carrying capacity of 34 Euro pallets

TECHNICAL INFORMATION

- Chassis: Compliant with the ISO 1726 standard, reinforced with Barlas-applied KTL technology (cataphoretic coating using the zinc-phosphate tri-electron method); manufactured from high-quality, high-strength S700 MC steel. Consists of two I-section longitudinal members connected by the main cross member and the king pin cross member.

- Braking system: Dual-circuit electro-pneumatic EBS 2S/2M braking system compliant with UN ECE R13, incorporating anti-lock (ABS) and roll stability support (RSS) and a voltage supply (24V) through the brake lamp.
- Tyre size: 385/65 R 22.5
- Axles: BPW disc-braked axles, each with a technical capacity of 9 tons.
- Electrical system: 24 V Aspöck lighting system with 2x7 and 1x15 pin sockets, compliant with UN ECE R48 and ADR regulations. Aspöck Europoint III bulb-type lighting system with LED front position lamps and side position lamps and rear stop lamps.
- Floor: 28 mm phenolic resin-coated plywood floor compliant with EN 283 standards, rated for a 5,460 kg forklift axle load.
- K-Fix: Load securing points at 70 mm intervals on both sides of the side rave, 118 per side and 236 in total. Each lashing point provides a 2,5 ton capacity and is compatible with all types of lashing straps.
- Front panel type: Reinforced aluminium full front panel with an internal protection plate
- Roof type: Edscha single-side sliding roof system, openable from the rear

Light Tarpaulin



CHASSIS

- The chassis main plate (web plate – longitudinal member), upper and lower flanges and all cross members are made of high-strength imported and st52 grade sheet steel. The chassis is robot-welded in an I-section form.

BODY

- High-strength imported sheet steel, resistant to abrasion and impact, is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKING SYSTEM

- WABCO or KNORR-BREMSE 2S-2M EBS system with RSS.

RUNNING GEAR

- Air-suspended domestic axle set with drum brakes, 70 single-leaf springs and 3x9 ton capacity.
- 6+1 tyres of 385x65xR22,5 size in a brand selected by Barlas, with rims matching these tyres.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical parking legs
- 1 tubular spare wheel carrier
- 1 chock holder and chock
- 2 storage cabinets
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- 6 full plastic mudguards
- 1 tonnage gauge

STANDARD FEATURES

- Removable bolts

INTERMEDIATE POSTS

- Sliding intermediate posts easily adjustable to the interior height options

TARPAULIN SYSTEM

- Manufactured at 900 gr/m² weight with a 12x12 weave density
- 4000 N/cm breaking strength
- 600 N tear strength
- EN 12642 CODE XL certified tarpaulin

ROOF SYSTEM

- EN 12642 CODE XL certified
- 5 cm x 4 steps
- 20 cm liftable double travel height available
- Single-side sliding roof system that can be raised up to 40 cm to ease loading

OPTIONS

- Steel or aluminium dropside options
- Disc-braked axles
- Aluminium rims
- Parking leg
- King pin

Standard Tarpaulin



CHASSIS

- The chassis main plate (web plate – longitudinal member), upper and lower flanges and all cross members are made of high-strength imported and st52 grade sheet steel. The chassis is robot-welded in an I-section form.

BODY

- High-strength imported sheet steel, resistant to abrasion and impact, is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKING SYSTEM

- WABCO or KNORR-BREMSE 2S-2M EBS system with RSS.

RUNNING GEAR

- Air-suspended domestic axle set with drum brakes, 70 single-leaf springs and 3x9 ton capacity.
- 6+1 tyres of 385x65xR22,5 size in a brand selected by Barlas, with rims matching these tyres.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical parking legs
- 1 tubular spare wheel carrier
- 1 chock holder and chock
- 2 storage cabinets
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- 6 full plastic mudguards
- 1 tonnage gauge

STANDARD FEATURES

- Removable bolts

INTERMEDIATE POSTS

- Sliding intermediate posts easily adjustable to the interior height options

TARPAULIN SYSTEM

- Manufactured at 900 gr/m² weight with a 12x12 weave density
- 4000 N/cm breaking strength
- 600 N tear strength
- EN 12642 CODE XL certified tarpaulin

ROOF SYSTEM

- EN 12642 CODE XL certified
- 5 cm x 4 steps
- 20 cm liftable double travel height available
- Single-side sliding roof system that can be raised up to 40 cm to ease loading

OPTIONS

- Steel or aluminium dropside options
- Disc-braked axles
- Aluminium rims
- Parking leg
- King pin
- Note: According to the available technical documents, no technical differences have been identified between the Standard Tarpaulin model and the Light Tarpaulin model.

05

Refrigerated Trailers

Insulated refrigerated bodies for every link of the cold chain.

1 PRODUCTS · 4 MODELS



5.1 Refrigerated Trailer

Refrigerated Trailer



MODELS (4)

T.SRI C / 10 - 12 / 27

T.SRI F / 10 - 12 / 27

T.SRI P / 10 - 12 / 27

T.SRI FP / 10 - 12 / 27

Technical specifications below refer to the **T.SRI C / 10 - 12 / 27** model; please request a quote for the other models.

TECHNICAL DIMENSIONS

- Fifth wheel height (H5): 1.120 mm
- Gooseneck (NH): 10 mm
- Wheelbase (Wb): 7.450 mm
- External length (L): 13.600 mm
- Internal length (Il): 13.385 mm
- Vehicle width (W): 2.600 mm
- Internal width (IW): 2.460 mm
- Internal clear height (IH): 2.650 mm
- Tare weight $\pm 3\%$: 7.490 kg

TECHNICAL CAPACITY

- King-pin capacity: 12.000 kg
- Axle load: 27.000 kg
- Gross weight: 39.000 kg

TECHNICAL INFORMATION

- Chassis: Consists of 2 welded I-section longitudinal members made of high-strength S 700 MC material, with the necessary main cross member, king-pin and cross members in between.
- Brake system: Dual-circuit electro-pneumatic Wabco brand EBS 2S/2M brake system compliant with UN ECE R13 regulation, including anti-lock braking (ABS) and roll stability support (RSS).
- Tyre size: 385/65 R22.5
- Axles: BPW brand axles with air suspension and disc brakes.
- Electrical system: The vehicle is fitted with Aspöck Europoint 3 brand bulb-type 24 V rear lights: 4 white LED position lamps on the front panel. 2 red LED upper position lamps at the rear of the vehicle. 4 orange LED marker lamps on each side panel. In addition, 2 bulb-type number plate lamps.
- Floor: Floor compliant with EN 283, resistant to a 7.200 kg forklift axle load, 135 mm thick, insulated and reinforced with cross members, with a 3 mm thick chequer-plate aluminium top surface.
- General superstructure type: 61 mm thick glass-reinforced polyester sandwich side panels with strength and insulation enhanced by composite reinforcements. The 73 mm thick front panel is prepared for cooling unit installation. A 250 mm high aluminium skirt sheet runs along the inner face of the side panels and front panel. These skirt sheets are welded to the floor to increase box strength. 85 mm thick double-leaf GRP sandwich composite doors, sealed around the leaves with special gaskets. A 140 mm high aluminium skirt sheet is fitted to the lower part of the rear door. Rubber ramp buffers are placed vertically along the rear frame height to protect the hinges. Extra GRP profiles are placed inside the rear pillar to improve the rear construction of the vehicle. 84 mm thick composite sandwich roof. 4 LED interior lamps are integrated into the roof.
- 2. Flower carrier ice reefer

06

Dry Freight & Box Bodies

Steel box, dropside and coil carrier solutions for general cargo.

5 PRODUCTS · 5 MODELS



6.1 Closed Box Steel Cargo Carrier

6.2 Dry Freight - Steel Box Body

6.4 Dry Freight Aluminium Dropside

6.5 Dry Freight Light Dropside

6.6 Dry Freight Coil Carrier

Closed Box Steel Cargo Carrier



Chassis

- Designed in accordance with international transport standards to provide trouble-free carriage under full load in all ground conditions. Overloading has also been taken into account in the strength calculations. The chassis consists of two "I"-section bodies of high-strength steel and is manufactured using submerged arc welding technology.

Suspension and axle system

- Axle with a 3x12 ton carrying capacity
- Air suspension system
- EBS braking system designed to European standards

Landing legs

- Two-speed mechanical landing leg system with 25 ton lifting capacity and 50 ton carrying capacity

Tyres

- 385/65 R22,5, 6+1 units

Rims

- 6 + 1 steel rims, sized 11,75*22,5

KING-PIN

- The king pin complies with 2" SAE / DIN standards and is made of forged steel (42Cr Mo4) highly resistant to tension and rupture; it can be replaced practically thanks to its bolted connections.

Electrical system

- 24 V electrical installation compliant with EU standards.
- Multi-chamber stop lamps incorporating a fog lamp and a reversing lamp are fitted on the vehicle.
- 1 ABS socket and 2 electrical sockets are provided.

Walls

- Manufactured from ST 37 A1 quality sheet steel, 2 mm thick.

Standard accessories

- 1 tool cabinet
- 1 plastic water tank
- 1 fire extinguisher cabinet
- 1 chock
- Separate mudguard for each tyre

Options

- Capacity
- Upper body features
- Number of dropsides
- Filling and discharge hatches suitable for wheat unloading

Paint

- After cleaning with water and chemical mixtures, the vehicle is shot blasted; following a double primer coat, it is painted to the requested RAL code in a special oven.

Dry Freight - Steel Box Body



Chassis

- Designed in accordance with international transport standards to provide trouble-free carriage under full load in all ground conditions. Overloading has also been taken into account in the strength calculations. The chassis consists of two "I"-section bodies of high-strength steel and is manufactured using submerged arc welding technology.

Suspension and axle system

- Axle with a 3x12 ton carrying capacity
- Air suspension system
- EBS braking system designed to European standards

Landing legs

- Two-speed mechanical landing leg system with 25 ton lifting capacity and 50 ton carrying capacity

Tyres

- 385/65 R22,5, 6+1 units

Rims

- 6 + 1 steel rims, sized 11,75*22,5

KING-PIN

- The king pin complies with 2" SAE / DIN standards and is made of forged steel (42Cr Mo4) highly resistant to tension and rupture; it can be replaced practically thanks to its bolted connections.

Electrical system

- 24 V electrical installation compliant with EU standards.

- Multi-chamber stop lamps incorporating a fog lamp and a reversing lamp are fitted on the vehicle.
- 1 ABS socket and 2 electrical sockets are provided.

Side dropsides

- 5 dropsides of 90 cm height are provided; 4 bolt-fixed dropsides are removable and made of 2 mm thick steel; each dropside carries hooks for chain and tarpaulin tensioning.

Floor

- A grid of one row of sheet steel and one row of timber, suitable for heavy-duty operation, is preferred.

Standard accessories

- 1 tool cabinet
- 1 plastic water tank
- 1 fire extinguisher cabinet
- 1 chock
- Separate mudguard for each tyre

Options

- Capacity
- Upper body features
- Number of dropsides
- Twist lock

Paint

- After cleaning with water and chemical mixtures, the vehicle is shot blasted; following a double primer coat, it is painted to the requested RAL code in a special oven.

Dry Freight Aluminium Dropside



CHASSIS

- The chassis main plate (web plate – longitudinal member), upper and lower flanges and all cross members are made of high-strength imported and st52 grade sheet steel. The chassis is robot-welded in an I-section form.

BODY

- High-strength imported sheet steel, resistant to abrasion and impact, is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKING SYSTEM

- WABCO or KNORR-BREMSE 2S-2M EBS system with RSS.

RUNNING GEAR

- Air-suspended domestic axle set with drum brakes, 70 single-leaf springs and 3x9 ton capacity.
- 6+1 tyres of 385x65xR22,5 size in a brand selected by Barlas, with rims matching these tyres.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical parking legs
- 1 tubular spare wheel carrier
- 1 chock holder and chock
- 2 storage cabinets
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- 6 full plastic mudguards
- 1 tonnage gauge

STANDARD FEATURES

- Manual lift and brake cut-off on the 1st axle.

OPTIONS

- Aluminium dropsides are available in 70-80-90 cm height options.
- Disc-braked axles of European origin
- Aluminium rims
- Twist locks
- Parking leg
- King pin

Dry Freight Light Dropside



CHASSIS

- The chassis main plate (web plate – longitudinal member), upper and lower flanges and all cross members are made of high-strength imported and st52 grade sheet steel. The chassis is robot-welded in an I-section form.

BODY

- High-strength imported sheet steel, resistant to abrasion and impact, is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKING SYSTEM

- WABCO or KNORR-BREMSE 2S-2M EBS system with RSS.

RUNNING GEAR

- Air-suspended domestic axle set with drum brakes, 70 single-leaf springs and 3x9 ton capacity.
- 6+1 tyres of 385x65xR22,5 size in a brand selected by Barlas, with rims matching these tyres.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical parking legs
- 1 tubular spare wheel carrier
- 1 chock holder and chock
- 2 storage cabinets
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- 6 full plastic mudguards
- 1 tonnage gauge

STANDARD FEATURES

- Manual lift and brake cut-off on the 1st axle.

OPTIONS

- Platform material: 1 row sheet steel - 1 row timber, wear-plate sheet, MDF with forklift tracks
- Inside-mounted and outside-mounted dropsides
- Dropsides are available in 70-80-90 cm height options.

Dry Freight Coil Carrier



CHASSIS

- The chassis main plate (web plate – longitudinal member), upper and lower flanges and all cross members are made of high-strength imported and st52 grade sheet steel. The chassis is robot-welded in an I-section form.

BODY

- High-strength imported sheet steel, resistant to abrasion and impact, is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKING SYSTEM

- WABCO or KNORR-BREMSE 2S-2M EBS system with RSS.

RUNNING GEAR

- Air-suspended domestic axle set with drum brakes, 70 single-leaf springs and 3x9 ton capacity.
- 6+1 tyres of 385x65xR22,5 size in a brand selected by Barlas, with rims matching these tyres.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical parking legs
- 1 tubular spare wheel carrier
- 1 chock holder and chock
- 2 storage cabinets
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- 6 full plastic mudguards
- 1 tonnage gauge

STANDARD FEATURES

- Manual lift and brake cut-off on the 1st axle.

OPTIONS

- Platform material: 1 row sheet steel - 1 row timber, wear-plate sheet
- MDF with forklift tracks
- Inside-mounted and outside-mounted dropsides
- Coil well
- Side tipping
- Disc-braked axles
- Aluminium rims
- Twist locks
- Parking leg
- King pin

07 Container Carriers

Fixed, telescopic, tipping and in-port container chassis family.

7 PRODUCTS · 13 MODELS



7.1 Tipping Container Carrier

7.2 High Cube Container Carrier

7.3 Container Carrier

7.4 In-Port (Terminal) Container Carrier

7.5 Fixed Container Carrier

7.6 Standard Container Carrier

7.7 Telescopic Container Carrier

Tipping Container Carrier



CHASSIS

- The chassis main plate (web plate – longitudinal member), upper and lower flanges and all cross members are made of high-strength imported and st52 grade sheet steel. The chassis is robot-welded in an I-section form.

BODY

- High-strength imported sheet steel, resistant to abrasion and impact, is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKING SYSTEM

- WABCO or KNORR-BREMSE 2S-2M EBS system with RSS.

RUNNING GEAR

- Air-suspended domestic axle set with drum brakes, 70 single-leaf springs and 3x9 ton capacity.
- 6 tyres of 385x65xR22,5 size in a brand selected by Barlas, with rims matching these tyres.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical parking legs
- 1 tubular spare wheel carrier
- 1 chock holder and chock
- 2 storage cabinets
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- 6 full plastic mudguards
- 1 tonnage gauge

HYDRAULIC SYSTEM

- Heavy-duty, 5-stage telescopic cylinder
- Two-speed staged valve
- Limit control valve
- 120 lt oil tank
- Hoses and fittings for the hydraulic installation
- Air-controlled switch mounted inside the cab


STANDARD FEATURES

- Manual lift and brake cut-off for the 1st axle

OPTIONS

- Production available in 20 feet, 30 feet and 40 feet sizes
- Disc-braked axles
- Aluminium rims
- Twist locks
- Parking leg
- King pin

High Cube Container Carrier

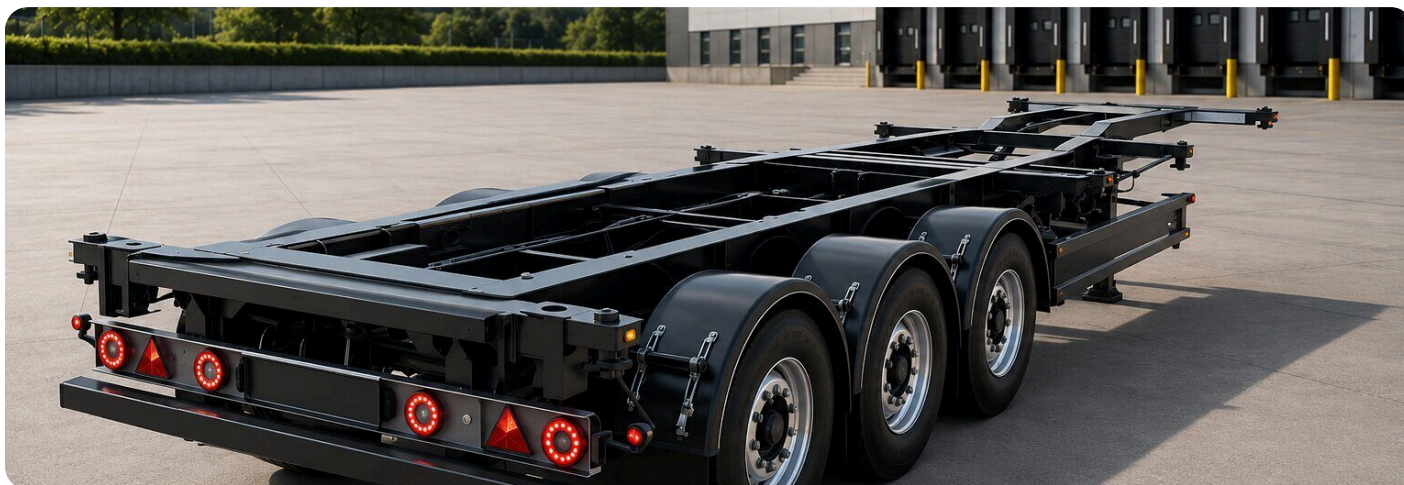

- Note: Technical content is identical to the Tipping Container Carrier.

DIFFERENCE

- 20 feet
- 30 feet
- 40 feet
- 45 feet
- Production can be carried out in the above sizes.

Container Carrier



Chassis

- Designed in accordance with international transport standards to provide trouble-free carriage under full load in all ground conditions. Overloading has also been taken into account in the strength calculations. The chassis consists of two "I"-section bodies of high-strength steel and is manufactured using submerged arc welding technology.

Suspension and axle system

- Axle with a 3x12 ton carrying capacity
- Air suspension system
- EBS braking system designed to European standards

Landing legs

- Two-speed mechanical landing leg system with 25 ton lifting capacity and 50 ton carrying capacity

Tyres

- 385/65 R22,5, 6+1 units

Rims

- 6 + 1 steel rims, sized 11,75*22,5

KING-PIN

- The king pin complies with 2" SAE / DIN standards and is made of forged steel (42Cr Mo4) highly resistant to tension and rupture; it can be replaced practically thanks to its bolted connections.

Electrical system

- 24 V electrical installation compliant with EU standards.

- Multi-chamber stop lamps incorporating a fog lamp and a reversing lamp are fitted on the vehicle.
- 1 ABS socket and 2 electrical sockets are provided.

Side dropsides

- N/A

Floor

- One row of sheet steel and one row of chequered plate, suitable for heavy-duty operation, is preferred.
- The vehicle features 8 twist locks.

Standard accessories

- 1 tool cabinet
- 1 plastic water tank
- 1 fire extinguisher cabinet
- 1 chock
- Separate mudguard for each tyre

Options

- Capacity
- Upper body features
- Number of dropsides
- Number of twist locks

Paint

- The vehicle, cleaned with water and chemical mixtures, is shot blasted; following a double primer coat, it is painted to the requested RAL code in a special oven.

In-Port (Terminal) Container Carrier



CHASSIS

- The chassis main plate (web plate – longitudinal member), upper and lower flanges and all cross members are made of high-strength imported and st52 grade sheet steel. The chassis is robot-welded in an I-section form.

BODY

- High-strength imported sheet steel, resistant to abrasion and impact, is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKING SYSTEM

- WABCO or KNORR-BREMSE 2S-2M EBS system with RSS.

RUNNING GEAR

- Drum-braked domestic axle set with 70 single-leaf springs, air suspension and 2x9 or 2x12 ton capacity.
- 8 tyres in a brand selected by Barlas are fitted, together with rims matching these tyres.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical parking legs
- 1 tubular spare wheel carrier
- 1 chock holder and chock
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- Full plastic mudguards
- 1 tonnage gauge

STANDARD FEATURES

- Not specified.

OPTIONS

- Disc-braked axles
- Aluminium rims
- Twist locks
- Parking leg
- King pin

Fixed Container Carrier



MODELS (4)

Fixed Container Carrier (T.SHG S / 40 - 12 / 27)

Fixed Container Carrier

Fixed Container Carrier (T.SHF T / 20 - 12 / 27)

Fixed Container Carrier (T.SHG L / 45 - 15 / 27)

Technical specifications below refer to the **Fixed Container Carrier (T.SHG S / 40 - 12 / 27)** model; please request a quote for the other models.

TECHNICAL DIMENSIONS

- Fifth wheel height (H5): 1.100 mm
- Gooseneck (NH): 130 mm
- Wheelbase (Wb): 7.480 mm
- Exterior length (L): 12.590 mm
- Vehicle width (W): 2.550 mm
- Tare weight $\pm 3\%$: 4.460 kg

TECHNICAL CAPACITY

- King pin capacity: 12.000 kg
- Axle load: 27.000 kg
- Gross weight: 39.000 kg

CHASSIS

- Octagonal box-section chassis made of high-quality, high-strength S700 MC steel with KTL coating, compliant with the ISO 1726 and ISO 1726-2 standards. The box sections are joined by suitable cross member connections. Reinforced with extra cross members to allow carriage of different container types.

BRAKING SYSTEM

- A dual-circuit electro-pneumatic EBS 2S/2M braking system is used; the system complies with UN ECE R13, incorporates anti-lock (ABS) and roll stability support (RSS), and provides a voltage supply (24V) through the brake lamp.

TYRE SIZE

- 385/65 R22.5

AXLES

- BPW axles with air suspension and disc brakes, each with a 9 ton capacity.

TOTAL TYRE-RIM COUNT

- 7 rims and 6 + 1 (spare) tyres

ELECTRICAL SYSTEM

- Aspöck Europoint III bulb-type lighting system with 24 V LED side position lamps, compliant with UN ECE R48 and ADR regulations.

TWIST LOCKS

- The vehicle features 4 x 2 twist locks suitable for carrying 2 x 20 ft and 1 x 40 ft HC containers. (HC containers exceed the legal overall height at fifth wheel heights of 1150 mm and above.)

MECHANICAL LANDING LEGS

- Jost mechanical landing legs with a 24 ton technical carrying capacity, compliant with the ISO 1726 standard.

REAR CLOSING PLATE

- 3.000 mm long loading platform compliant with the TS EN 283 5.4 floor strength standard, rated for a 5.400 kg forklift axle load.

Standard Container Carrier



CONTAINER COMPATIBILITY

- 2x20
- 1x30
- 1x40
- 1x40 HC
- 1x45 HC
- Note: Technical content is identical to the Telescopic Container Carrier model.

Telescopic Container Carrier



MODELS (4)

Telescopic Container Carrier

Telescopic Container Carrier (T.SHG AVH / 45 - 12 / 27)

Telescopic Container Carrier (T.SHG AH / 45 - 12 / 27)

Telescopic Container Carrier (T.SHG AMH / 40 - 12 / 27)

Technical specifications below refer to the **Telescopic Container Carrier** model; please request a quote for the other models.

CONTAINER COMPATIBILITY

- 2x20
- 1x30
- 1x40
- 1x40 HC
- 1x45 HC
- Note: Technical content is largely identical to the previous models. In addition, "Container compatibility" information is provided.

08

Lowbed & Heavy Haul

Fixed, extendable and hydraulically steered lowbeds for machinery and project cargo.

7 PRODUCTS · 10 MODELS



8.1 Well-Type Lowbed

8.2 Hydraulically Steered Lowbed

8.5 Front-Loading Lowbed

8.6 Fixed Lowbed

8.7 Standard-Axle Lowbed

8.8 Extendable Lowbed

8.9 Side-Extendable Extendable Lowbed

Well-Type Lowbed



CHASSIS

- The chassis main plate (web plate – longitudinal member), the upper and lower flanges and all cross members are manufactured from high-strength imported and ST52 grade sheet steel. The chassis is robot-welded in an I-section form.

BODY

- High-strength imported sheet steel resistant to wear and impact is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKING SYSTEM

- 2S-2M EBS system with RSS, from WABCO, KNORR-BREMSE or other brands.

RUNNING GEAR

- Drum or disc type axles with 9/12/14/16 ton capacity
- Single or double 100-type leaf springs
- Air suspension
- 12 tyres in 245x70xR17,5 size with matching rims

PAINT

- Grit metal blasting, epoxy primer and acrylic paint application (in oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical landing legs
- 1 tubular spare wheel holder
- 1 wheel chock with holder
- 2 storage boxes
- The vehicle carries 1 fire extinguisher cabinet
- 1 water tank
- 1 tonnage gauge

STANDARD FEATURES

- Manual lift and brake cut-off for the 1st axle

OPTIONS

- Container locks
- Landing leg
- King pin
- Folding ramp, 300 + 70 cm long
- Hydraulic ramp shifting
- Self-steering axles
- Axles with mechanical suspension
- 17,5 / 19,5 / 22,5 tyre options

Hydraulically Steered Lowbed



TECHNICAL DIMENSIONS

- 5th wheel height (H5): 1.250 mm
- Wheelbase (Wb): 8.800 mm
- Overall length (L): 13.250 mm
- Gooseneck length (Gl): 3.900 mm
- Well length (Pl): 9.300 mm
- Platform extension (Pe): 6.200 mm
- Vehicle width (W): 2.550 mm overall width + 600 mm side extensions
- Platform height (laden) (Ph): 875 mm
- Axle spacing (A): 1.360 mm

TECHNICAL CAPACITY

- King pin capacity: 24 ton king-pin capacity
- Axle load: 36.000 kg
- Gross vehicle weight: permissible total technical weight [80 km/h] = 60.000 kg

TECHNICAL INFORMATION

- Chassis: manufactured from high-quality, high-strength S700 steel in compliance with ISO 1726
- Braking system: dual-circuit electro-pneumatic WABCO EBS 2S/2M braking system with anti-lock (ABS) and roll stability (RSS) functions, compliant with UN ECE R13
- Tyre size: 245/70 R17,5 tyres
- Axles: BPW axles with air suspension and drum brakes
- Electrical system: 24 Volt lighting system with 2 x 7 + 1 x 15 pin sockets, compliant with UN ECE R48
- Floor: 45 mm thick hardwood floor with chequered-plate steel covering over the wheels
- Steering type: the 1st, 2nd and 3rd axles are hydraulically steered.

Front-Loading Lowbed



- Note: the technical content reviewed is identical to the Well-Type Lowbed model. No differences were found in technical specifications, running gear, standard features or options.

Fixed Lowbed



TECHNICAL DIMENSIONS

- 5th wheel height (H5): 1.250 mm
- Wheelbase (Wb): 8.480 mm
- Overall length (L): 13.190 mm
- Gooseneck length (G1): 3.950 mm
- Well length (Pl): 9.240 mm
- Vehicle width (W): 2.550 mm + 600 mm (w/ side extension brackets)
- Platform height (laden) (Ph): 890 mm
- Tare weight $\pm 3\%$: 11.400 kg
- Wheelbase (Wb): 8.100 mm
- Platform height (laden) (Ph): 875 mm
- Tare weight $\pm 3\%$: 8.500 kg

TECHNICAL CAPACITY

- King pin capacity: 18.000 kg
- Axle load: 48.000 kg
- Gross vehicle weight: 58.000 kg
- King pin capacity: load capacity = 18.000 kg
- Axle load: 30.000 kg
- Gross vehicle weight: technical gross weight [60 km/h] = 52.800 kg

TECHNICAL INFORMATION

- Chassis: manufactured from high-quality, high-strength ST 52 steel in compliance with ISO 1726

- Braking system: dual-circuit electro-pneumatic WABCO EBS 4S/3M braking system with anti-lock (ABS) and roll stability (RSS) functions, compliant with UN ECE R13
- Tyre size: 245/70 R 17.5
- Axles: BPW axles with air suspension and drum brakes
- Electrical system: 24 V lighting system with LED side marker lamps, 2 x 7 and 1 x 15 pin sockets, compliant with UN ECE R48
- Floor: with a well length of 9.240 mm, the floor consists of 45 mm hardwood with chequered-plate steel over the tyres. With a well length of 11.700 mm, the floor consists of chequered-plate steel covering
- Ramp type: folding ramp
- Steering type: the front 2 axles are fixed and the rear 2 axles are self-steering.
- Chassis: manufactured from high-quality, high-strength S700 MC steel in compliance with ISO 1726.
- Braking system: dual-circuit electro-pneumatic WABCO EBS 2S/2M braking system with anti-lock (ABS) and roll stability (RSS) functions, compliant with UN ECE R13
- Floor: 45 mm thick hardwood floor with chequered-plate steel covering over the wheels
- Ramp type: the rear of the vehicle is designed to accept aluminium ramps only, with portable ramp provisions for loading operations
- Steering type: equipped with 3 fixed axles

Standard-Axle Lowbed



MODELS (4)

3-Axle Lowbed

4-Axle Lowbed

5-Axle Lowbed

6-Axle Lowbed

Technical specifications below refer to the **3-Axle Lowbed** model; please request a quote for the other models.

CHASSIS

- The chassis main plate (web plate – longitudinal member), the upper and lower flanges and all cross members are manufactured from high-strength imported and ST52 grade sheet steel. The chassis is robot-welded in an I-section form.

BODY

- High-strength imported sheet steel resistant to wear and impact is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKING SYSTEM

- 2S-2M EBS system with RSS, from WABCO, KNORR-BREMSE or other brands.

RUNNING GEAR

- Drum or disc type axles with 9/12/14/16 ton capacity
- Single or double 100-type leaf springs
- Air suspension
- 12 tyres in 245x70xR17,5 size with matching rims

PAINT

- Grit metal blasting, epoxy primer and acrylic paint application (in oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical landing legs
- 1 tubular spare wheel holder
- 1 wheel chock with holder
- 2 storage boxes
- The vehicle carries 1 fire extinguisher cabinet
- 1 water tank
- 1 tonnage gauge

STANDARD FEATURES

- Manual lift and brake cut-off for the 1st axle

OPTIONS

- Container locks
- Landing leg
- King pin
- Folding ramp, 300 + 70 cm long
- Hydraulic ramp shifting
- Self-steering axles
- Axles with mechanical suspension
- 17,5 / 19,5 / 22,5 tyre options

Extendable Lowbed



TECHNICAL DIMENSIONS

- 5th wheel height (H5): 1.300 mm
- Wheelbase (Wb): 8.430 mm
- Overall length (L): 13.190 mm
- Gooseneck length (G1): 3.950 mm
- Well length (Pl): 9.240 mm
- Platform extension (Pe): 6.000 mm
- Vehicle width (W): 2.550 mm + 600 mm (w/ side extension brackets)
- Platform height (laden) (Ph): 890 mm
- Tare weight ±3%: 12.500 kg
- Wheelbase (Wb): 8.405 mm
- Tare weight ±3%: 13.550 kg
- 5th wheel height (H5): 1.350 mm
- Wheelbase (Wb): 8.130 mm
- Tare weight ±3%: 15.150 kg
- 5th wheel height (H5): 1.250 mm
- Wheelbase (Wb): 7.800 mm
- Platform height (laden) (Ph): 875 mm
- Tare weight ±3%: 12.530 kg

TECHNICAL CAPACITY

- King pin capacity: 18.000 kg
- Axle load: 30.000 kg
- Gross vehicle weight: 48.000 kg
- Axle load: 40.000 kg
- Gross vehicle weight: 58.000 kg
- King pin capacity: 24.000 kg
- Axle load: 50.000 kg
- Gross vehicle weight: technical gross weight [80 km/h] = 74.000 kg

TECHNICAL INFORMATION

- Chassis: manufactured from high-quality, high-strength ST 52 and S700 MC steel in compliance with ISO 1726.
- Braking system: dual-circuit electro-pneumatic Wabco EBS 4S/3M braking system with anti-lock (ABS) and roll stability (RSS) functions, compliant with UN ECE R13
- Tyre size: tyres in 245/70 R17,5 size
- Axles: BPW axles with air suspension and drum brakes
- Electrical system: 24 V lighting system with LED side marker lamps, 2 x 7 and 1 x 15 pin sockets, compliant with UN ECE R48 and ADR regulations
- Floor: 45 mm thick hardwood floor with chequered-plate steel covering over the wheels
- Steering type: the front 2 axles are fixed and the rear 1 axle is self-steering
- Steering type: the front 2 axles are fixed and the rear 2 axles are self-steering
- Ramp type: folding ramp
- Steering type: the front 3 axles are fixed and the rear 2 axles are self-steering
- Tyre size: 245/70 R 17.5
- Axles: BPW axles with 12 ton technical load capacity (10 ton legal load capacity), air suspension and drum brakes
- Electrical system: 24 V lighting with LED side marker lamps, 2 x 7 and 1 x 15 pin sockets, compliant with UN ECE R48 and ADR regulations
- Ramp type: the vehicle carries 2 short, hydraulically folding ramps with mechanical right/left shifting and 40 mm heavy wooden decking, 3.650 mm long, 850 mm wide, 3.130 mm high in the closed position, with a 13° ramp angle and 40.000 kg capacity
- Steering type: the front 2 axles are fixed and the rear 1 axle is self-steering.

Side-Extendable Extendable Lowbed



- Note: the technical content reviewed is identical to the Well-Type Lowbed model. No differences were found in technical specifications, running gear, standard features or options.

09

Platform / Flatbed

Coil carrier and standard flatbeds for long and wide loads.

2 PRODUCTS · 2 MODELS




9.3 Coil Carrier Flatbed



9.4 Standard Flatbed

Coil Carrier Flatbed

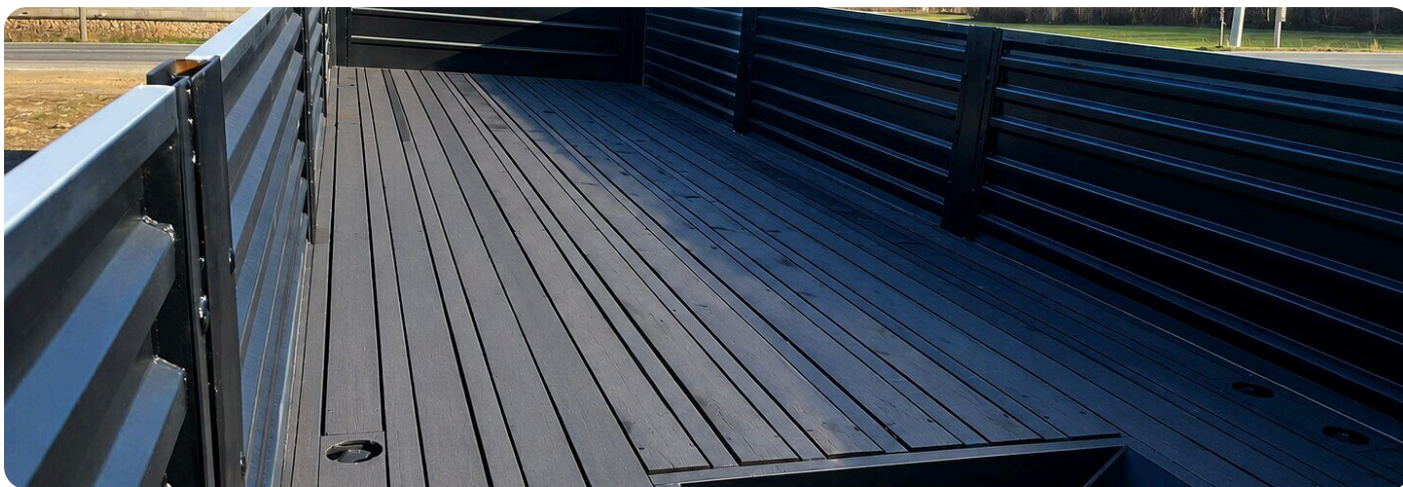

- Note: According to the current technical documentation, no technical differences have been identified between the Coil Carrier Flatbed model and the Standard Flatbed model. In the reviewed content, the chassis, body, running gear, standard features and options are exactly the same.

Standard Flatbed



CHASSIS

- High-strength imported and ST52 grade sheet steel is used for the chassis main plate (web plate – longitudinal member), the upper and lower flanges and all cross members. The chassis is robot-welded in an I-section form.

BODY

- Wear- and impact-resistant, high-strength imported sheet steel is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKE SYSTEM

- WABCO or KNORR-BREMSE 2S-2M EBS system with RSS.

RUNNING GEAR

- Domestically produced drum-brake axle set with air suspension, 70 single-leaf springs and 3x9 or 3x12 ton capacity.
- 6 tyres of the brand selected by Barlas, size 385x65xR22,5, with matching rims.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical landing legs
- 1 tube-type spare wheel carrier
- 1 wheel chock and chock holder
- 2 storage cabinets
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- 6 plastic full mudguards
- 1 tonnage gauge

STANDARD FEATURES

- Manual lift and brake cut-off for the 1st axle

OPTIONS

- Wear-plate steel sheet as platform material
- 1 row steel sheet - 1 row timber
- MDF with forklift tracks
- Plywood
- Disc-brake axles
- Aluminium rims
- Container locks
- Landing leg
- King pin

10 Drawbar Trailers

Axled drawbar trailer solutions for agriculture and industry.

3 PRODUCTS · 6 MODELS



10.1 Axled Drawbar Trailer

10.2 Axled Truck Carrier

10.3 Agricultural Drawbar Trailer / Semi-Trailer

Axled Drawbar Trailer



MODELS (3)

[2-Axle Drawbar Trailer](#)
[3-Axle Drawbar Trailer](#)
[4-Axle Drawbar Trailer](#)

Technical specifications below refer to the **2-Axle Drawbar Trailer** model; please request a quote for the other models.

CHASSIS

- High-strength imported and ST52 grade sheet steel is used for the chassis main plate (web plate – longitudinal member), the upper and lower flanges and all cross members. The chassis is robot-welded in an I-section form.

BODY

- Wear- and impact-resistant, high-strength imported sheet steel is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

BRAKE SYSTEM

- WABCO or KNORR-BREMSE 2S-2M EBS system with RSS.

RUNNING GEAR

- Domestically produced drum-brake axle set with air suspension, 70 single-leaf springs and 2x9 or 2x12 ton capacity.
- 4 tyres of the brand selected by Barlas, size 385x65xR22,5, with matching rims, or tyres in different sizes.

PAINT

- Grit metal shot blasting, epoxy primer and acrylic paint application (in an oven-cured paint booth).

STANDARD ACCESSORIES

- 2-speed mechanical landing legs
- 1 tube-type spare wheel carrier
- 1 wheel chock and chock holder
- 2 storage cabinets
- 1 fire extinguisher cabinet on the vehicle
- 1 water tank
- 6 plastic full mudguards
- 1 tonnage gauge

STANDARD FEATURES

- Manual lift and brake cut-off for the 1st axle

OPTIONS

- Disc-brake axles
- Aluminium rims
- Container locks
- Landing leg
- King pin

Axled Truck Carrier



MODELS (2)

[2-Axle Truck Carrier](#)[3-Axle Truck Carrier](#)

Technical specifications below refer to the **2-Axle Truck Carrier** model; please request a quote for the other models.

- Note: The technical content is largely the same as the 6-Car Car Carrier model.

RUNNING GEAR

- Drum brakes with 2x9 ton capacity
- 70 single-leaf springs
- Domestically produced axle set with air suspension

Agricultural Drawbar Trailer / Semi-Trailer



- Note: Largely the same technical structure as the 2-Axle Drawbar Trailer model.

RUNNING GEAR

- Domestically produced drum-brake axle set with air suspension, 70 single-leaf springs and 2x9 or 2x12 ton (on request) capacity.
- 4 tyres of the brand selected by Barlas, size 385x65xR22,5, with matching rims.

OPTIONS

- Disc-brake axles
- Aluminium rims
- Container locks
- Landing leg
- King pin

11

Other Special Products

Purpose-engineered bodies, from water tenders to car carriers.

10 PRODUCTS · 12 MODELS



11.1 Water/Fire Tender Truck

11.2 Livestock Carrier

11.4 Refuse Collection

11.6 Bulk Feed Carrier

11.7 Double Deck Standard

11.8 Intermodal Box

11.9 Log/Timber Transport

11.10 Concrete Mixer

11.11 Car Carrier Trailer

11.14 Textile Box

Water/Fire Tender Truck



BODY

- Utility water tanker and water/fire tender vehicles are produced with volume options ranging from 8.000 to 18.000 litres. High-strength ST-37 or ST-52 steel is used for the water tank. Epoxy paint is applied to the inner surface; the outer surface is finished with electrostatic oven-cured paint.

PUMP SYSTEM

- 30 m³/h - 60 m³/h flow rate
- 3 - 7 bar operating pressure

LIGHTING

- 24 V lighting with 2x7+1x15 pin sockets.

PAINT

- Grit metal blasting, epoxy primer and acrylic paint are applied.

STANDARD FEATURES

- 2 storage boxes
- Side cyclist protection guards
- Plastic mudguards

OPTIONS

- Roof-mounted water cannon
- Front pressurised water
- Rear spray system
- Fire hose

Livestock Carrier



DIMENSIONS

- Width: max. 2.550 mm
- Height: max. 4.000 mm
- Axle spacing: 1.310 mm. 1.300 ~ 1.400 mm *
- King-pin height: 1.220 mm. 1.250 ~ 1.350 mm *
- Tare weight: 11.500 kg. ± 5%

CAPACITY

- Loading capacity: cattle 40 – 90 head ± 5%
- Sheep/goats 250 - 300 head ± 5%
- (Varies depending on the species and weight of the animals carried.)

PRODUCTS CARRIED

- Loading capacity: cattle and small livestock
- Varies according to the selected product type and optional equipment.

VEHICLE BODY

- Square-section, high-performance design suited to loading and unloading conditions,
- High-strength, special-alloy imported aluminium material resistant to oxidation and impact,
- ISO 3834 welded-fabrication quality approval is held,
- Cross members of specially formed profile material placed transversely on the auxiliary chassis arms, spaced evenly and frequently enough to carry the load from the body; an anti-slip floor plate made of the widest one-piece sheet both transversely and longitudinally; a long-life, safe and high-strength fixed floor platform, joined to the cross members of the auxiliary chassis evenly and uniformly by method welding with excellent weld performance, forming a whole with reinforced skirt plates,
- The floor platform has a special drain that prevents the accumulation of urine and droppings and minimises leakage.

- A strong front wall reinforced with one-piece interlocking panels, fixed to the floor platform and integrated with the fixed front side supports, distributing the hydraulic lifting force of the deck platforms to the body through vertical support profiles,
- Side walls reinforced with vertical support profiles, fixed to the floor platform, strengthened with interlocking one-piece panels and preventing the outward bowing that load forces could cause,
- A deck platform running vertically in the bearing slots of the side walls, adjustable to different animal heights, moved by the hydraulic lifting system and maintaining load balance during lifting; movable or fixed, long-life, safe, high-strength, of the same anti-slip construction as the floor platform, offering ergonomic use,
- On the deck platforms, portable separators that protect the animals during transport without restricting their natural movements in any way and prevent the animals from touching and injuring each other during jolts caused by vehicle or road conditions, together with portable partition gates of the same construction as the separators, allowing different animal species to be carried at the same time,
- Insulated front and rear roofs, independent of each other, integrated with the vehicle body, fixed or optionally raisable by a hydraulic system; when raised they provide natural ventilation and increase carrying capacity,
- A lockable rear door hinged to the rear side supports, reinforced with one-piece interlocking panels, opening fully or in sections and providing a tight seal,
- A loading ramp or lift of the same construction as the floor platform, with suitable height and angle; anti-slip, providing guidance and protection with portable side barriers; allowing the animals to be loaded and unloaded easily and quickly, opened by a mechanical or hydraulic system.

DRINKING WATER SYSTEM

- A pneumatically controlled aluminium drinking water tank with level indicator, mounted on the front wall or in the utility cabinet, with a capacity matched to the load tonnage,
- A supply and drinking-nipple line located at the front, middle and rear inside the body, with flow provided from the main valve on the tank through butterfly valves,
- Bowl-type drinking nipples for cattle, positioned on the right and left of the front, middle and rear walls, activated by the animal's touch,
- For small livestock, drinking nipples on the side walls activated by the animal's touch.

VENTILATION AND CLIMATE CONTROL SYSTEM

- Meets the animals' fresh-air needs during transport,
- Natural ventilation via sliding window covers that can be set to open, half-open and closed positions,
- Special ventilation fans placed on one side of the body in each compartment, switched on and off via the electrically controlled panel in the utility cabinet,
- In addition, a heating system for cold climate conditions (optional)

INSPECTION WINDOWS

- Small lockable observation hatches in each compartment for use during veterinary inspections

LIGHTING SYSTEM

- LED lamps placed on the body and next to the ventilation fan in each compartment, providing sufficient interior lighting for checking and caring for the animals, switched on and off via the electrically controlled panel in the utility cabinet.
- Floodlight lamps mounted on top of the rear wall, providing sufficient lighting while the animals are loaded and unloaded

LIFTING SYSTEM

- The lifting system, equipped with a circuit-breaker system and driven by a hydro-electric motor, is directed via special hydraulic valves located in the utility cabinet.

SAFETY MEASURES

- Secondary locking devices providing safety on moving mechanisms,
- Protective covers over the ventilation fans,
- An audible warning lamp indicating that the hydraulic system is active,
- Reflective plates compliant with ECE R 70 and strip reflectors compliant with ECE 104,
- Warning texts, markings, information and operating instructions placed at the required points.

CHASSIS

- A monoblock chassis with an "I" cross-section, matched to the body design, reinforced with intermediate cross members, bolted to the body platform chassis and flexible against torsion and bending,
- The parts forming the chassis construction are manufactured in perfect harmony by certified welders using synergic welding machines under ISO 3834 welded-fabrication quality approval.

CHASSIS EQUIPMENT

- King-pin: component type-approved to ECE R 55, 2", removable from below,
- Landing legs: two-speed trailer support legs, each with 25 ton dynamic and 50 ton static load capacity,
- Axles: axle set with 10 ton capacity each, twin tyres, air suspension and a special track width providing rollover safety,
- Rims: 7,50 x 19,5
- Tyres: 265/70 R 19,5
- Braking system: 2S2M EBS braking system with RSP, compliant with ECE R 13
- Electrical system: 24 V, 7-pin electrical system compliant with ECE R 105
- Bumper: compliant with ECE R 58

PAINT

- After production, the necessary surface cleaning is applied to the outer body and chassis to remove imperfections,
- Before painting, the surface is matted and made ready for paint,
- Painting is carried out with at least 2 coats of epoxy primer,
- As the final coat, 2 coats of acrylic paint with "OVEN-CURED PAINT" application,
- Certified paint operators use advanced technical equipment to achieve a homogeneous distribution and a lacquer-gloss surface finish at every point of the body.

ACCESSORIES

- Toolbox: 1 pc
- Securing pins: 20 pcs
- Pin placement rod & ladder: 1 pc
- Spare wheel carrier: 1 pc
- Hand-wash water tank: 1 pc

Ro-Ro lashing ring

- Wheel chock: 2 pcs
- Mechanical jack: 1 pc

WARRANTY CERTIFICATE

- BARLAS reserves the right to modify its products. The technical information given is approximate and based on the standard product configuration. Dimensions may vary depending on the make and model of the truck. The information above does not constitute an offer. For further product details, please contact us.

Refuse Collection



BODY

- Different fabrication types are possible depending on the intended use and the vehicle's technical specifications. It can be used as a hydraulic compactor refuse truck, garbage truck or refuse collection vehicle.

PAINT

- Grit metal blasting, epoxy primer and acrylic paint are applied.

LIGHTING

- 24 V lighting with 2x7+1x15 pin sockets.

STANDARD FEATURES

- Floodlight
- Rotating beacon
- Cyclist protection barriers
- Rear step
- Automatic loading system
- Handholds

OPTIONS

- Camera system
- Various types of container lifting systems
- Cable-operated container lifting
- Hardox hopper
- Automatic lubrication system

Bulk Feed Carrier



DIMENSIONS

- Width: max. 2.550 mm
- Height: max. 3.950 mm *
- Axle spacing range: 1.300 ~ 1.400 mm *
- King-pin height: 1.250 ~ 1.350 mm *
- Tare weight: 6.700 ~ 7.350 kg *

CAPACITY

- Geometric volume: 44 – 62 m³ *
- Discharge hoppers: 1 ~ 4 *

BULK FEED CARRIER SILO TANKER

- Category: 4
- Products carried: bulk granular grains such as maize, barley, wheat and feed, and powdered foodstuffs
- Operating temperature: -20°C +50°C
- Certification: Machinery Safety Directive (2006/42/EC)
- Varies according to the selected product type and optional equipment.

BODY

- High-strength, special-alloy imported aluminium material with an elliptical cross-section design,
- A body structure unique in the silo-tanker manufacturing sector: circumferentially seamless, made up of one-piece sheets that meet inside the lower centre chassis, with weld joints executed by certified welders using a special welding method — a safe, smooth and even-surfaced, unmatched body structure,
- ISO 3834 welded-fabrication quality approval is held,
- Continuous, high-performance robotic welding technology minimises stress effects on the body and welding defects caused by the human factor, making the body safe against impacts and collisions,
- A body design with a W-angled, special twin-auger system that prevents material remaining inside and enables fast discharge.

FILLING LINE

- Top filling is carried out via filling lids hinged to the filling neck formed integrally with the body, opening horizontally with the aid of a spring system.

DISCHARGE LINE

- Two separate discharge systems operating from the top or the bottom, depending on the position of the silo,
- Top discharge is performed by sequential transfer from the discharge gates, opened by hydraulic cylinders in each compartment, to the independently operating horizontal augers, the vertical auger and the upper discharge pipe; bottom discharge is also possible by disabling top discharge,
- A switch at the end of the top discharge pipe automatically stops the filling process as soon as the silo is full.

HYDRAULIC PUMP UNIT AND CONNECTION PLATFORM

- The electric motor and hydraulic pump unit drives the hydraulic motors, supplying the energy required for the operation of the augers, the movement of the discharge gates and the left-right, up-down movement of the discharge pipe.

CONTROL PANEL AND HYDRAULIC CONTROL UNIT

- A control panel designed to control the augers, the connected hydraulic motors and the lighting system,
- A hydraulic control unit that opens and closes the gates in each compartment and steers the discharge arm — located at the top left relative to the direction of travel — up-down and left-right.

CHASSIS

- A special-design full chassis with an "I" cross-section, produced with robotic welding technology, matched to the body design and providing rollover safety,
- Connection brackets on the chassis side member that distribute the forces transmitted from road conditions to the running gear, reducing stress,
- Chassis construction parts are manufactured in perfect harmony by certified welders using synergic welding machines under ISO 3834 welded-fabrication quality approval.

CHASSIS EQUIPMENT

- King-pin: component type-approved to ECE R 55, 2" or 3,5", removable from below
- Landing legs: two-speed trailer support legs, each with 25 ton dynamic and 50 ton static load capacity
- Axles: axle set with 9 ~12 ton capacity each, mechanical or air suspension, drum or disc brakes
- Rims: 14,00 – 11,75 – 9,00 x 22,5
- Tyres: 425 - 385/65 R 22,5 (single) or 315/80 R 22,5 (twin)
- Braking system: EBS/ABS braking system compliant with ECE R 13
- Electrical system: ADR electrical set compliant with ECE R 105
- Bumper: compliant with ECE R 58

PAINT

- Painting is carried out with at least 2 coats of epoxy primer,
- As the final coat, 2 coats of acrylic paint with "OVEN-CURED PAINT" application,
- Advanced technical equipment achieves a homogeneous distribution and a lacquer-gloss surface finish at every point of the body.
- BARLAS reserves the right to modify its products. The technical information given is approximate and based on the standard product configuration. Dimensions may vary depending on the make and model of the truck. The information above does not constitute an offer. For further product details, please contact us.

Double Deck Standard



MODELS (2)

Double Deck Standard (VETD PLY TD 15 / 18)

Double Deck Standard (VETD PLY 12 / 27)

Technical specifications below refer to the **Double Deck Standard (VETD PLY TD 15 / 18)** model; please request a quote for the other models.

TECHNICAL DIMENSIONS

- 5th wheel height (H5): 1.150 mm
- Overall length (L): 13.820 mm
- Vehicle width (W): 2.550 mm
- Overall height: 4.030
- Wheelbase (Wb): 9.540 mm
- Gooseneck (NH): 292 mm
- 1st deck net interior height: 1.820 mm
- 2nd deck net interior height: 1.820 mm
- Interior length (Il): 13.560 mm
- Interior width (IW): 2.490 mm
- Wheel-box net interior width: 1.275 mm

TECHNICAL CAPACITY

- King pin capacity: 12.000 kg
- Axle load: 18.000 kg
- Gross weight: 30.000 kg
- Pallet capacity: carrying capacity of 52 Euro pallets

TECHNICAL INFORMATION

- Chassis: made of high-quality S355 steel, the vehicle chassis consists of one independent king pin section and one wheel-well section. The connection between them is provided by the side panels. There are 2 interchangeable king pins for tractor coupling.
- Axles: 2 galvanised Tridec LVO wheel boxes with independently suspended Gigant axles. The technical capacity of each axle group is 9.000 kg (right+left). Equipped with drum brakes.
- Tyre size: 385/65 R22,5
- Braking system: EBS 4S/3M
- Electrical system: the vehicle has Peterson LED rear lighting lamps. The vehicle body carries all the lighting lamps required by legal regulations.
- Box: a waterproof superstructure made of glass-fibre-reinforced polyester and plywood. Thanks to its special construction it increases the loading area, enabling carbon emissions to be reduced by up to 40%. The front and side walls and the roof are joined together with screws and aluminium profiles.
- Rear loading lift: the rear of the vehicle is fitted with a D-Hollandia DHVX-E3 rear loading lift. The taillift has a 3 ton lifting capacity with 2 lifting cylinders mounted vertically on the rear portal. A label showing the load diagram is provided on the vehicle side wall. The 1.830 mm long, 80 mm thick platform is equipped with side protection railings. Two side loading ramps allow loading from the right and left sides. A taillift battery allows loading and unloading to be carried out even without a tractor.

Intermodal Box



TECHNICAL DIMENSIONS

- 5th wheel height (H5): 950 mm
- Vehicle width (W): 2.550 mm
- Interior width (IW): 2.462 mm
- Net interior height (IH): 2.950 mm
- Front exterior height: 3.065 mm
- Rear exterior height: 3.100 mm
- Overall length (L): 13.710 mm
- Interior length (II): 13.615 mm
- Gooseneck (NH): 90 mm

TECHNICAL CAPACITY

- Axle load: 27.000 kg
- Gross weight: 39.000 kg
- King pin capacity: 12.000 kg
- Tare weight $\pm 3\%$: 8.600 kg

TECHNICAL INFORMATION

- Interior structure type: the inner side panels are lined with perforated, anodised, patented Talfix® aluminium sheet. Talfix®-lined panels are suitable for load securing, hanging garment transport and also double-deck loading.
- Tyre size: 445/45 R19.5
- Braking system: dual-circuit electro-pneumatic Wabco EBS 4S/2M braking system with anti-lock (ABS) and roll stability (RSS) functions, compliant with UN ECE R13.
- Axles: BPW axles with load capacity, air suspension and disc brakes.
- Electrical system: the vehicle has Aspöck Europoint 3 bulb-type 24 V rear lights: 4 white LED position lamps on the front panel. 2 red LED upper position lamps at the rear of the vehicle. 4 orange LED marker lamps on each side panel. In addition, 2 bulb-type number-plate lamps.
- Floor: phenol-resin-coated, 27 mm thick, water-resistant plywood floor with a 5.400 kg forklift axle load capacity.

Log/Timber Transport



CHASSIS

- The chassis main plate (web plate – longitudinal member), the upper and lower flanges and all cross members are manufactured from high-strength imported and ST52 grade sheet steel.

BODY

- High-strength imported sheet steel resistant to wear and impact is used in production.

LIGHTING SYSTEM

- 24 V lighting with 2x7+1x15 pin sockets.

PAINT

- Grit metal blasting, epoxy primer and acrylic paint application (in oven-cured paint booth).

STANDARD ACCESSORIES

- 1 wheel chock with holder
- 1 storage box
- The vehicle carries 1 fire extinguisher cabinet
- 1 water tank
- 6 full plastic mudguards

Concrete Mixer



DIMENSIONS

- Width: max. 2.550 mm
- Height: max. 3.020 mm
- Axle spacing range: 1.300 ~ 1.400 mm *
- King-pin height: 1.250 mm *
- Tare weight: 7900 kg. ± 5%

CAPACITY

- Mixer volume: 12 – 14 m³
- Varies according to the selected product type and optional equipment.

CHASSIS

- A special-design full chassis of high-strength steel with an "I" cross-section, matched to the superstructure type, manufactured with robotic welding technology, reinforced with intermediate cross members, flexible against torsion and bending and providing rollover safety,
- Connection brackets on the chassis side member that distribute the forces transmitted from road conditions to the running gear, reducing stress,
- The parts forming the chassis construction are manufactured in perfect harmony by certified welders using synergic welding machines under ISO 3834 welded-fabrication quality approval.

CHASSIS EQUIPMENT

- King-pin: component type-approved to ECE R 55, 2", removable from below
- Landing legs: two-speed trailer support legs, each with 25 ton dynamic and 50 ton static load capacity,
- Axles: axle set with 9 ton capacity each, air suspension, drum or disc brakes
- Rims: 11,75 x 22,5
- Tyres: 385/65 R 22,5
- Braking system: EBS braking system compliant with ECE R 13
- Electrical system: electrical set compliant with ECE R 105
- Bumper: compliant with ECE R 58

PAINT

- Painting is carried out with at least 2 coats of epoxy primer,
- As the final coat, 2 coats of acrylic paint with "OVEN-CURED PAINT" application,
- Advanced technical equipment achieves a homogeneous distribution and a lacquer-gloss surface finish at every point of the body.
- BARLAS reserves the right to modify its products. The technical information given is approximate and based on the standard product configuration. Dimensions may vary depending on the make and model of the truck. The information above does not constitute an offer. For further product details, please contact us.

Car Carrier Trailer



- Double-deck extendable car carrier trailers are high-capacity transport solutions designed and built specifically for automobile transport. To increase the number of vehicles carried, these trailers are usually designed with a two-deck structure. The upper decks sit at different levels from the lower deck and are typically equipped with hydraulic or mechanical systems to allow vehicles to be loaded and unloaded.

FEATURES AND ADVANTAGES

The features that set double-deck extendable car carrier trailers apart are

- High capacity: thanks to their two-deck structure, they can carry more vehicles than single-deck trailers.
- Flexible loading system: upper and lower decks equipped with hydraulic or mechanical systems allow vehicles to be loaded and unloaded quickly and safely.
- Durability and safety: their robust structure and the securing systems used to fix the vehicles during transport keep the carried vehicles safe.
- Long-distance transport: ideal for long-distance haulage, these trailers provide an important solution for car manufacturers, distributors and logistics companies.
- Operational efficiency: their high capacity and fast loading/unloading systems increase operational efficiency and help reduce operating costs.

INDUSTRY APPLICATIONS

- Car manufacturers, dealers, carriers and logistics companies widely use double-deck extendable car carrier trailers. These trailers are preferred especially in operations requiring the transport of large numbers of automobiles.

Textile Box



MODELS (2)

Textile Box (TGG TAL 12 / 27)

Textile Box (TGM TAL 12 / 27)

Technical specifications below refer to the **Textile Box (TGG TAL 12 / 27)** model; please request a quote for the other models.

TECHNICAL DIMENSIONS

- 5th wheel height (H5): 950
- Vehicle width (W): 2.550 mm
- Interior width (IW): 2.472 mm
- Net interior height (IH): 2.940 mm
- Overall height: 4.000 mm
- Overall length (L): 13.710 mm
- Interior length (IL): 13.605 mm
- Gooseneck (NH): 52 mm

TECHNICAL CAPACITY

- Tare weight $\pm 3\%$: 8.000 kg
- Gross weight: 39.000 kg
- Axle load: 27.000 kg
- King pin capacity: 12.000 kg

TECHNICAL INFORMATION

- Box: frameless, lightweight aluminium box. The outer side walls of Talson vehicles are made of corrosion-resistant, painted and certified aluminium plates. The aluminium plates are riveted along their edges to aluminium profiles at even intervals. Thus, if damage occurs anywhere on the side panels, only the damaged aluminium plate needs to be replaced instead of the semi-trailer's entire side wall, keeping repair costs to a minimum. Aluminium offers high UV resistance, ageing resistance and low dirt retention.
- Interior structure type: the inner side panels are lined with perforated, anodised, patented Talfix® aluminium sheet. Talfix®-lined panels are suitable for load securing, hanging garment transport and also double-deck loading.

- Tyre size: 445/45 R19.5
- Braking system: dual-circuit electro-pneumatic Wabco EBS 2S/2M braking system with anti-lock (ABS) and roll stability (RSS) functions, compliant with UN ECE R13.
- Chassis: a lightweight axle chassis made of high-quality St-52 steel, consisting of 2 C-section longitudinal beams and support cross members at the required intervals.
- Axles: BPW axles with load capacity, air suspension and disc brakes.
- Electrical system: the vehicle has Aspöck Europoint 3 bulb-type 24 V rear lights: 4 white LED position lamps on the front panel. 2 red LED upper position lamps at the rear of the vehicle. 4 orange LED marker lamps on each side panel. In addition, 2 bulb-type number-plate lamps.
- Floor: phenol-resin-coated, 27 mm thick, water-resistant plywood floor compliant with EN 283, with a 5.400 kg forklift axle load capacity.
- Rear panel type: a door made of 2-leaf interlocking aluminium profiles with concealed locks. Each leaf has 2 concealed-lock door handles and 5 hinges. Its flat surface makes it suitable for logo applications.
- Roof: a 23 mm thick roof lined on the inside with a one-piece glass-reinforced polyester sheet and on the outside with a one-piece aluminium sheet, strengthened with glass-reinforced polyester profiles. The roof is further reinforced with insulation material between the two sheets.
- General superstructure type: Talson's self-supporting box body structure is produced using a special aluminium sandwich design. The exterior consists of high-quality aluminium sheets attached to the substructure, providing a lighter and brighter design.



BARLAS
Trailer

**Whatever the load,
we build the vehicle that carries it.**

PHONE

0 552 500 20 00

E-MAIL

info@barlastrailer.com

WEB

www.barlastrailer.com

**PRODUCTION FACILITY &
SHOWROOM**

Fevziçakmak Mah. Şehit Hamdi
Karagöz Cad. No: 4s Karatay / Konya,
Türkiye