

## **MAPLITHO 70/130 CCK**

**Face Stock : Uncoated Woodfree Paper - 70 GSM ± 10%**

**Adhesive : Acrylic Emulsion.**


**Base Stock : Clay Coated Paper – 125 GSM ± 10%**

**Adhesive Coat Weight : 20 GSM ± 10%.**

**Loop Value : Above 600 Grams/Sq.inch**

**Sheer Value : Between 50 to 100 Minutes (Suspended Weight – 1 kg)**

**Peel Value : 1200-1400 Grams/inch.**

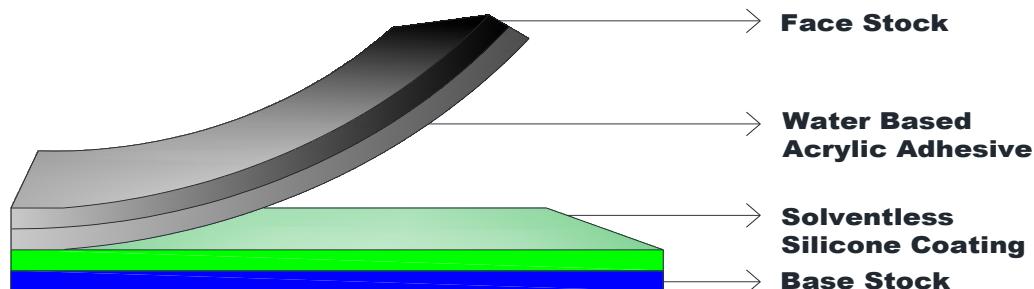

PRINT APPLICATION			
OFFSET	FLEXO	BARCODE	DIGITAL
✓	NR	NR	✓
NR – NOT RECOMMENDED			