

## **MC 85/100 CCK**

**Face Stock : Cast Coated Paper - 80 GSM ± 10%**

**Adhesive : Acrylic Emulsion.**


**Base Stock : Clay Coated Paper – 85 GSM ± 10%**

**Adhesive Coat Weight : 20 GSM ± 10%.**

**Loop Value : Above 600 Grams/Sq.inch**

**Sheer Value : Between 50 to 100 Minutes (Suspended Weight – 1 kg)**

**Peel Value : 1200-1600 Grams/inch.**

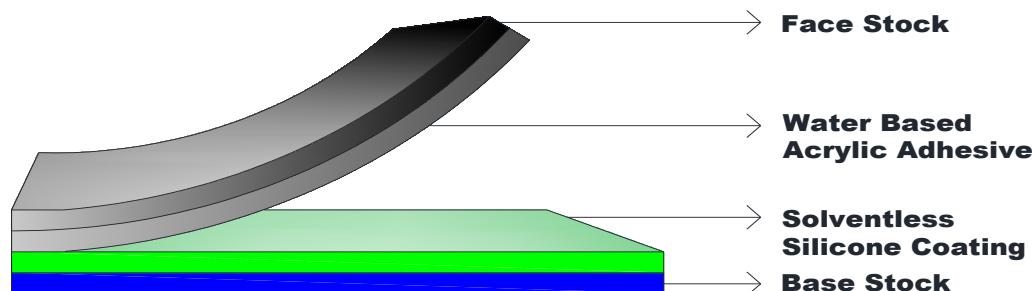

PRINT APPLICATION			
OFFSET	FLEXO	BARCODE	DIGITAL
✓	NR	NR	NR
NR – NOT RECOMMENDED			