




B CUBE GALAXY

TECHNICAL INFORMATION


BOOKLET V1/140220

Single module system measurements

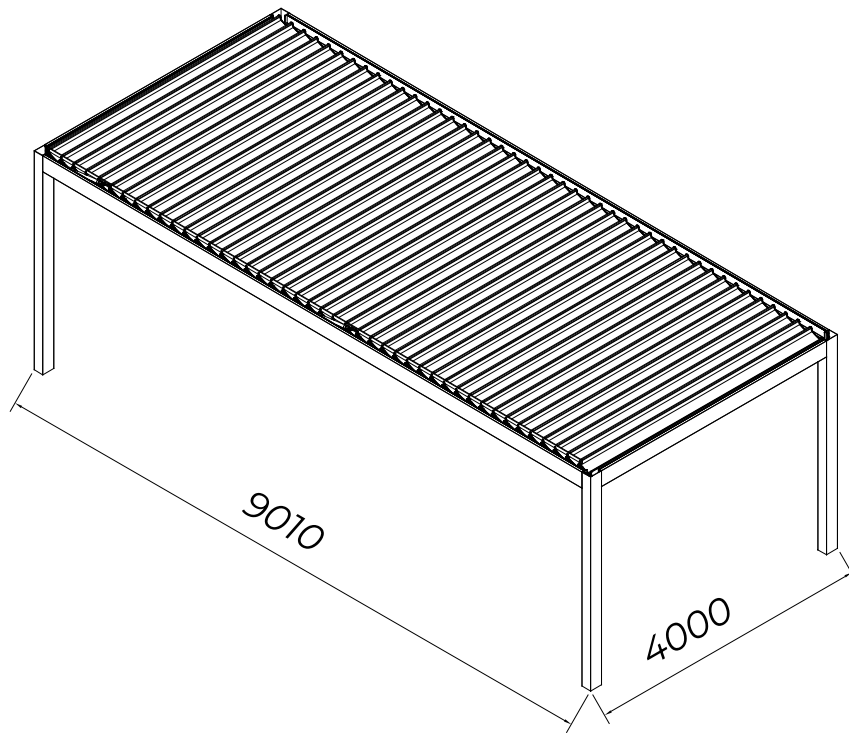


The maximum between two Carrier post is 4000mm.

Double module system measurements

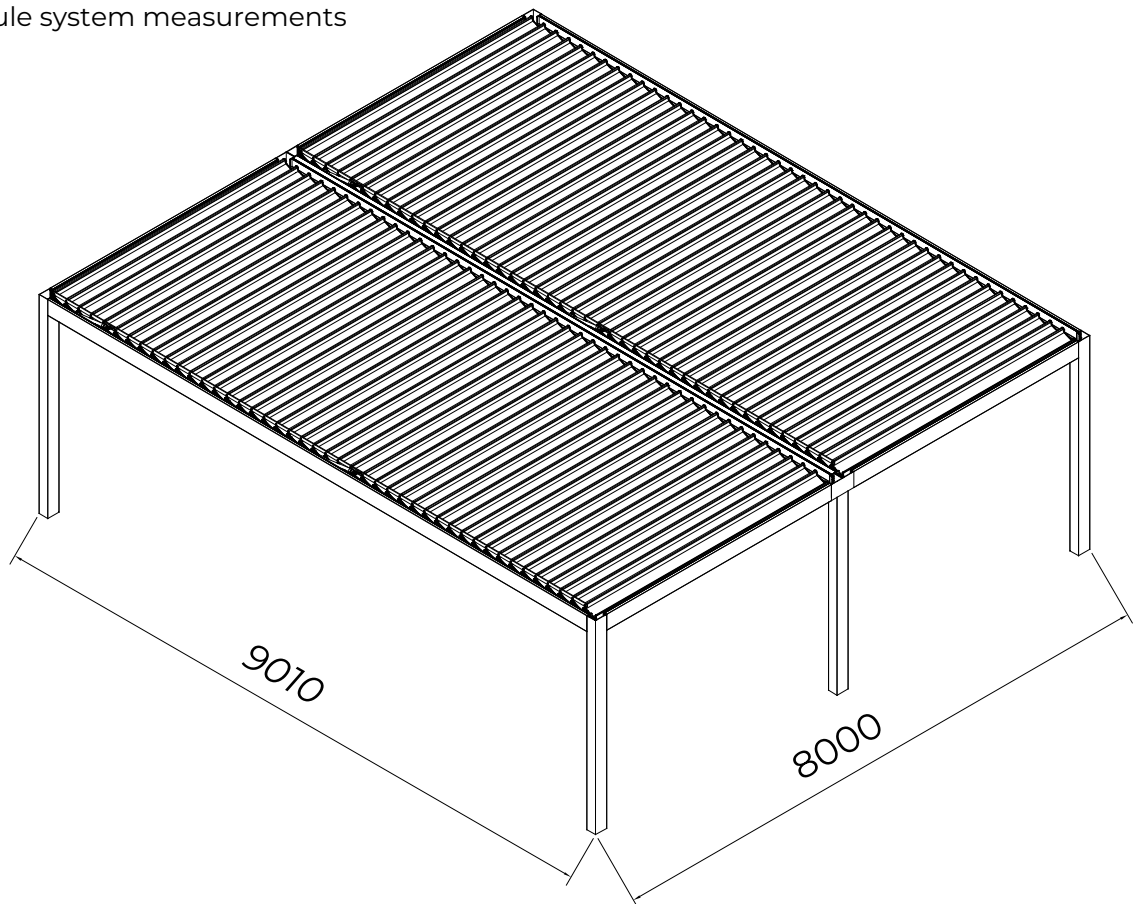

In 3 rafters modules, maximum 4000mm between each rafter and the front is maximum 8000 mm.


Note: Since our systems are modular, if desired they can be manufactured to the desired size by adding them next to each other. The number of front posts is calculated in a way that our company deems appropriate for the project.

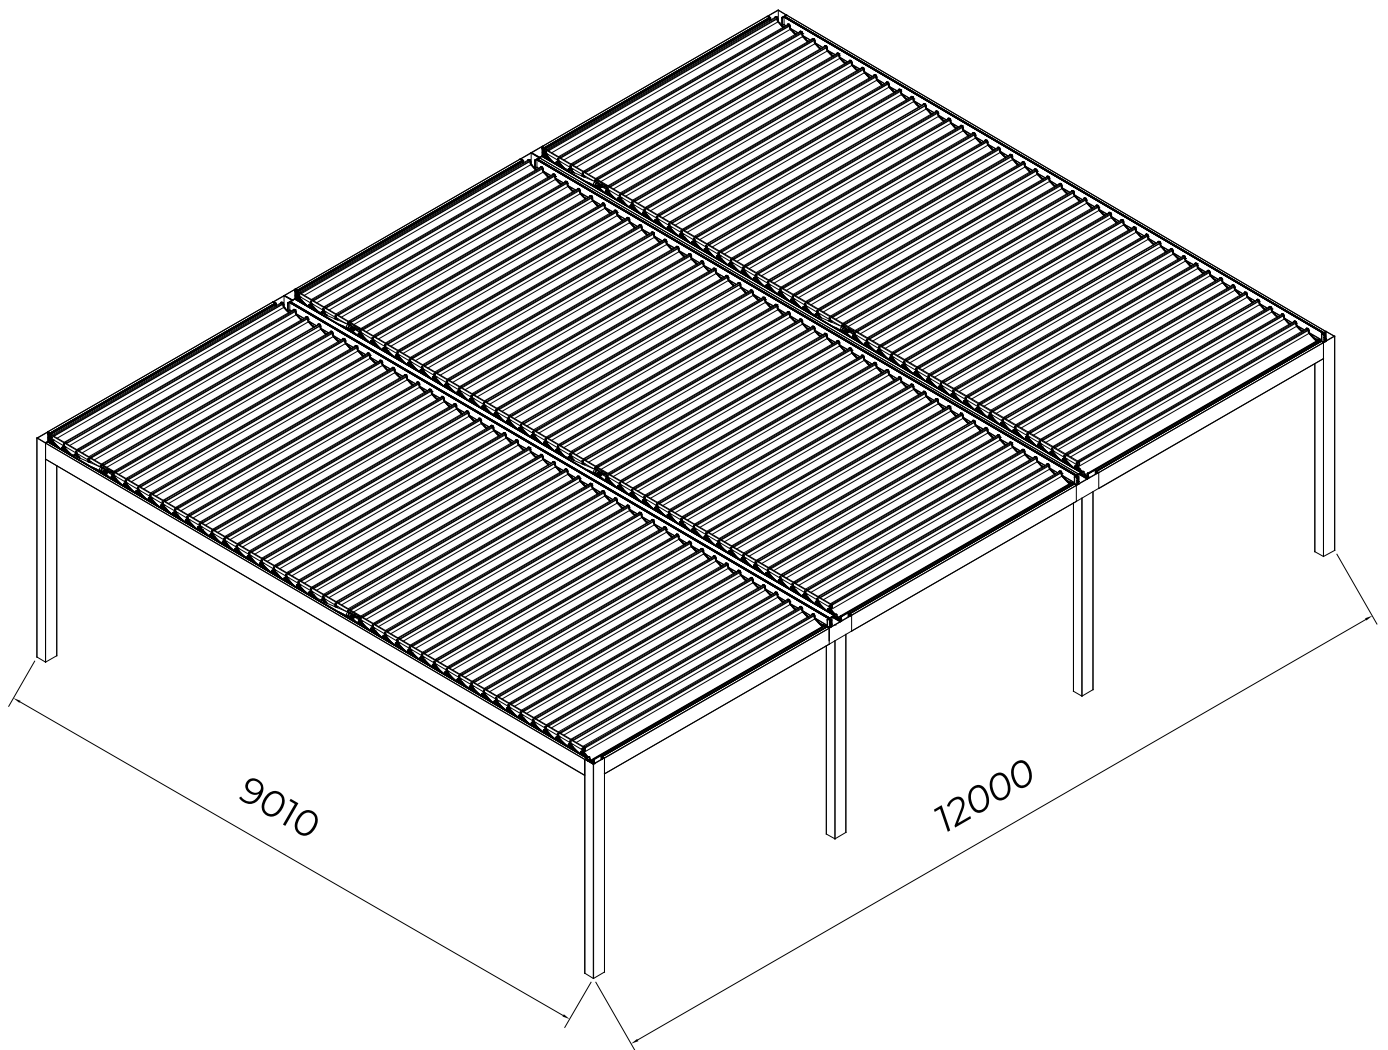


In 4 rafters modules, maximum 4000mm between each rafter and the front is maximum 12000mm.

Note: Since our systems are modular, if desired they can be manufactured to the desired size by adding them next to each other. The number of front posts is calculated in a way that our company deems appropriate for the project.


Profile section details

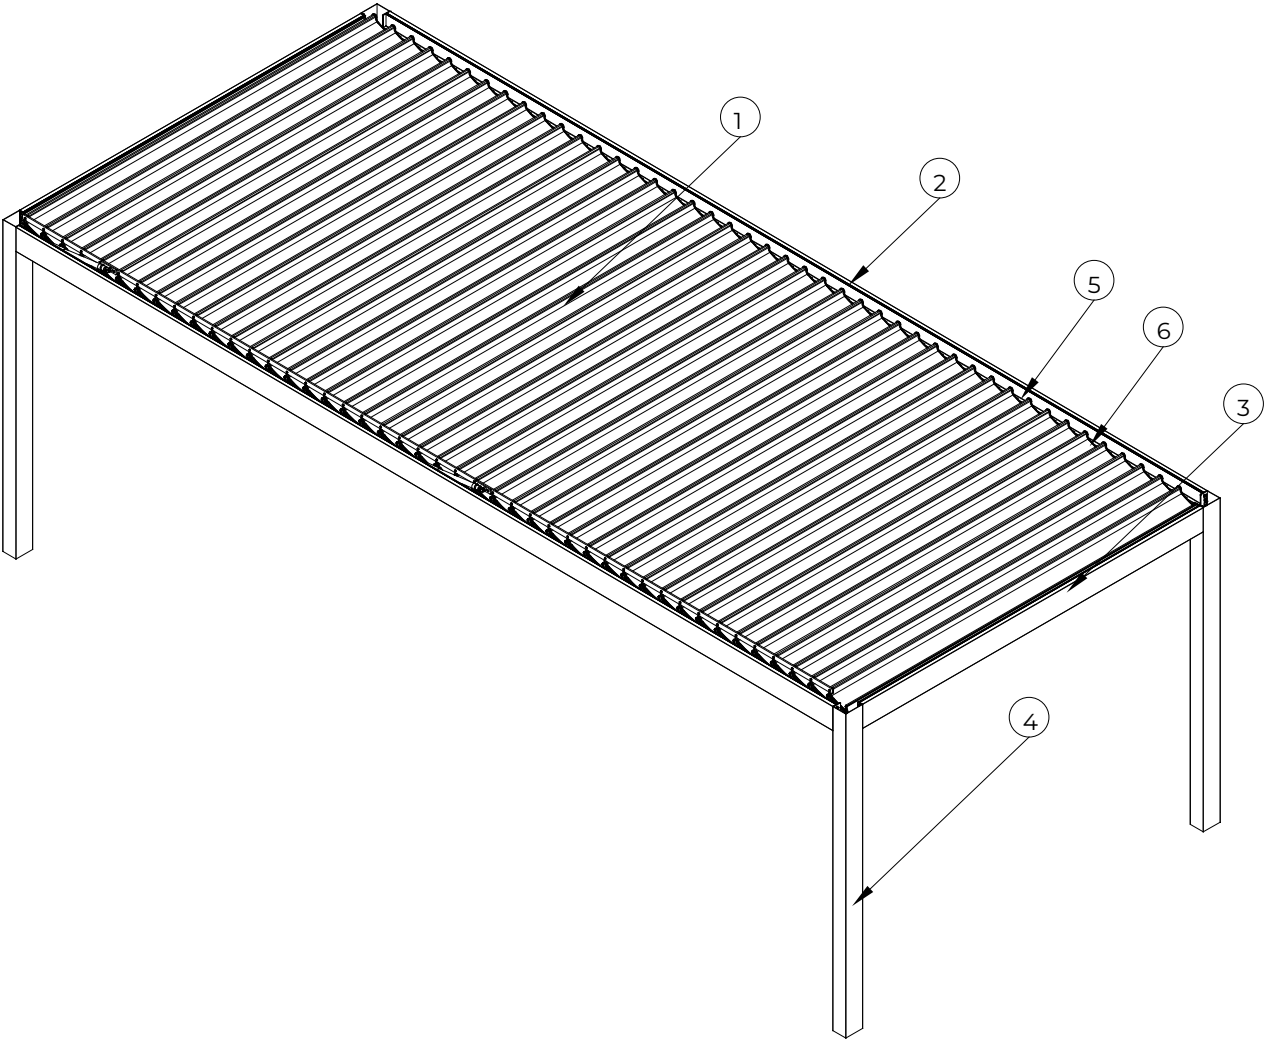


① louvres Profile

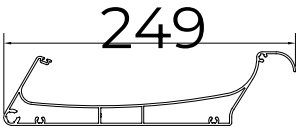


② Side Rafter & Gutter profile

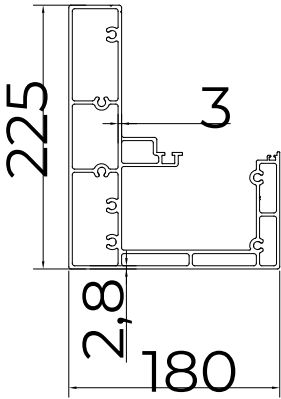


③ Front and Back Rafter & Gutter Profile

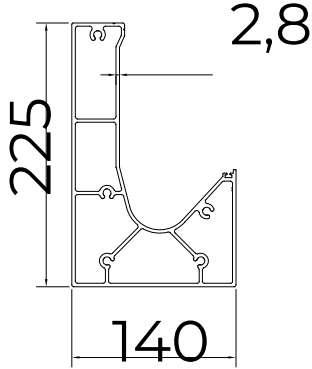


④ Carrier Post Profile

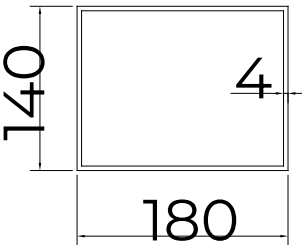


⑤ Profile for RGB Led



⑥ Profile for RGB and linear Led




Modules top view

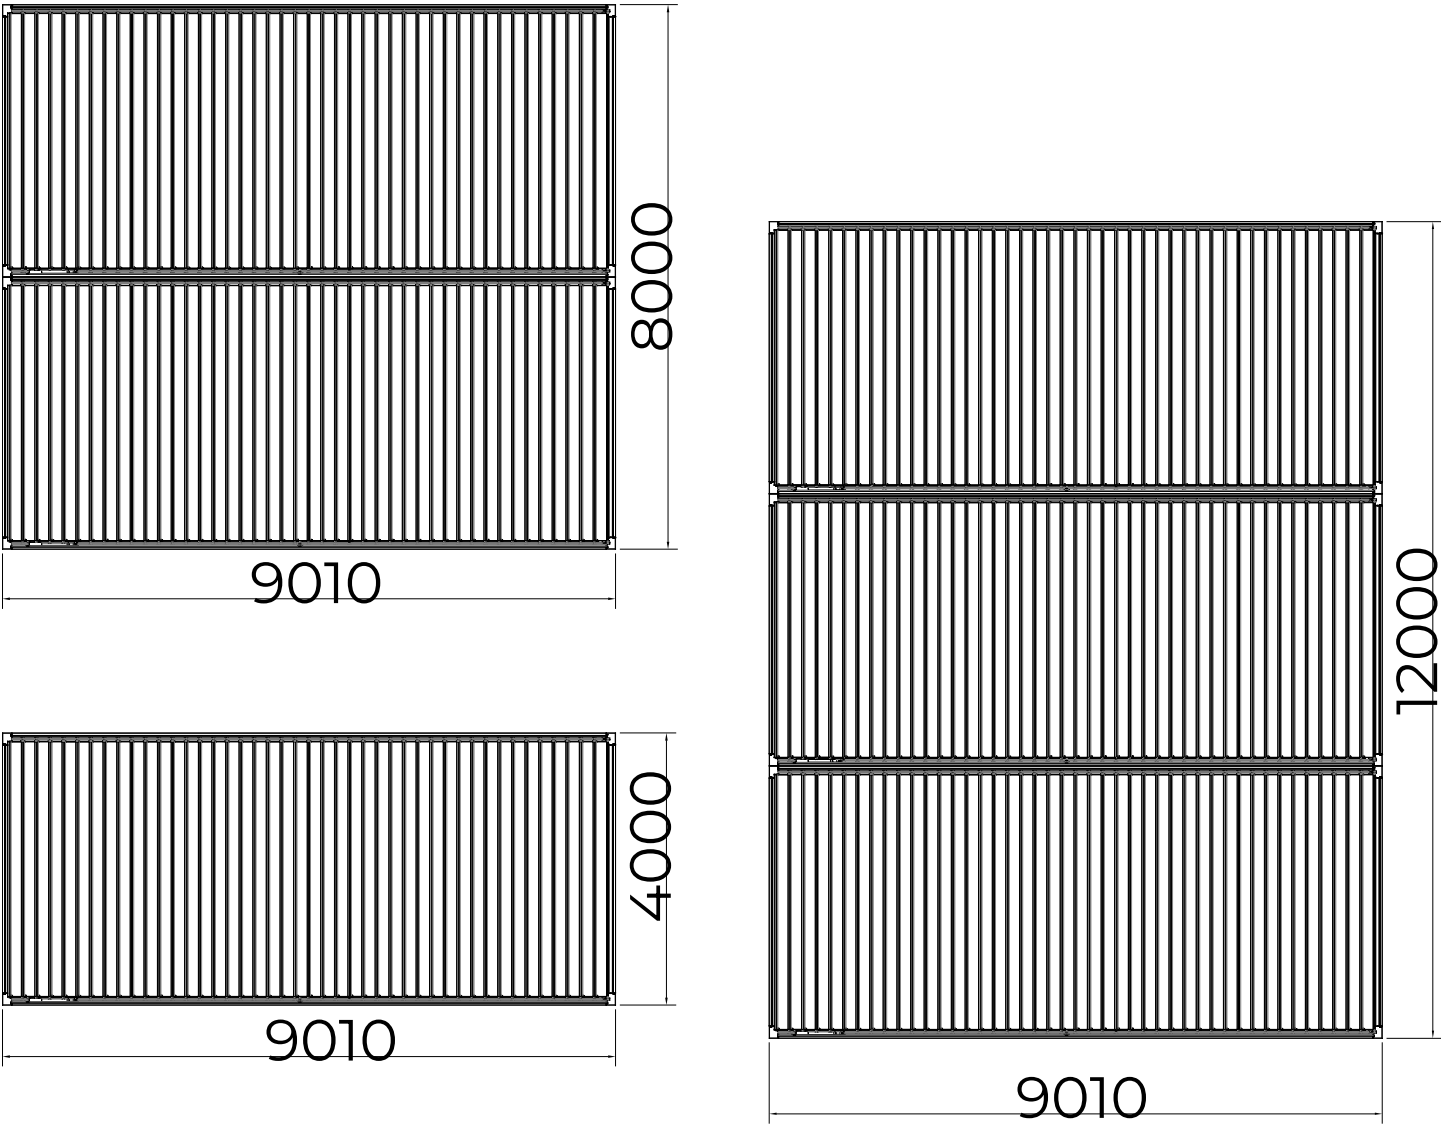


Note: Since our systems are modular, if desired they can be manufactured to the desired size by adding them next to each other. The number of front posts is calculated in a way that our company deems appropriate for the project.

Number of louvres and Projection



157

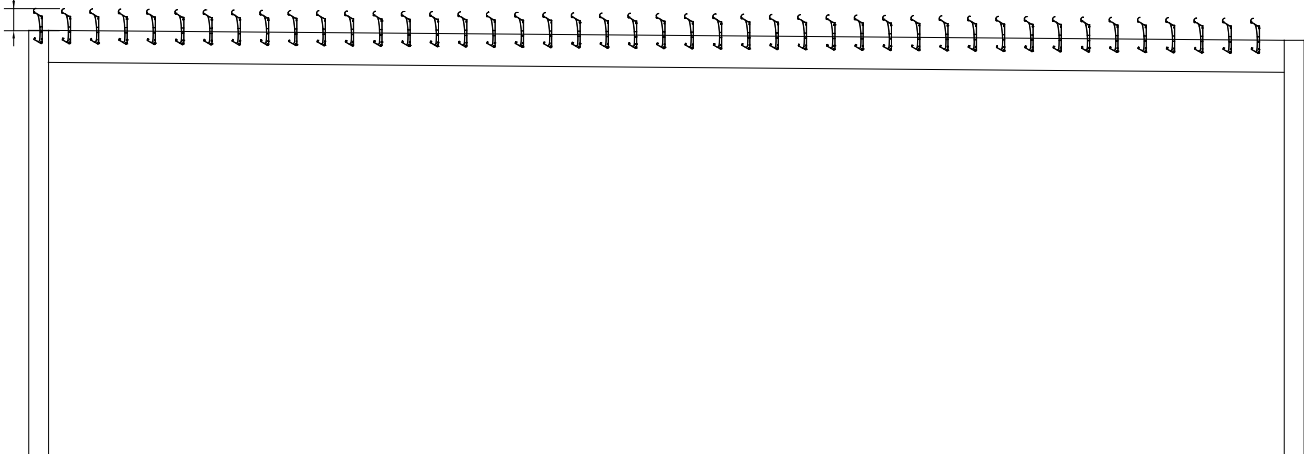

When the panels are upright, distance is 16 cm from the top.

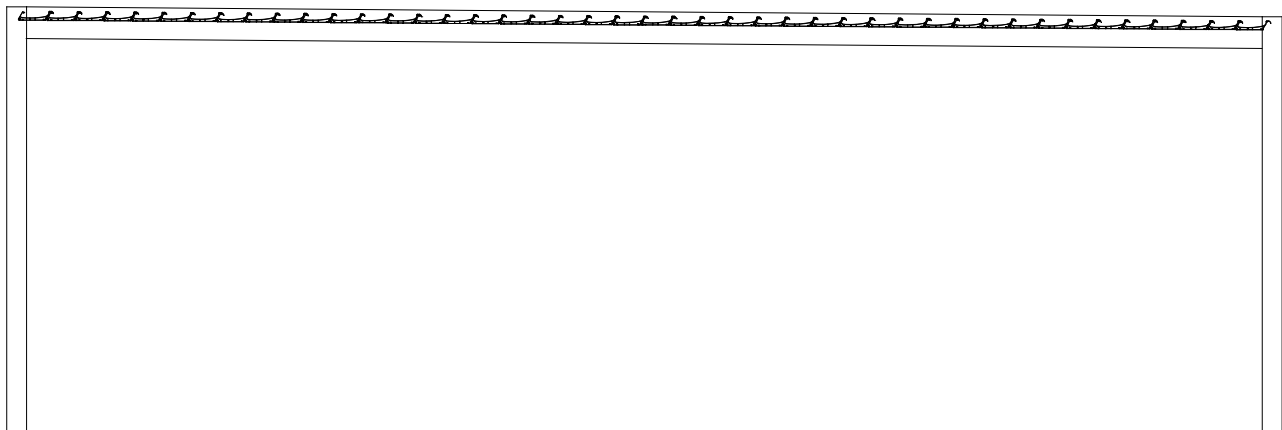


Louvres NUMBER	PROJECTION	Louvres NUMBER	PROJECTION
7	1610 mm	26	5410 mm
8	1810 mm	27	5610 mm
9	2010 mm	28	5810 mm
10	2210 mm	29	6010 mm
11	2410 mm	30	6210 mm
12	2610 mm	31	6410 mm
13	2810 mm	32	6610 mm
14	3010 mm	33	6810 mm
15	3210 mm	34	7010 mm
16	3410 mm	35	7210 mm
17	3610 mm	36	7410 mm
18	3810 mm	37	7610 mm
19	4010 mm	38	7810 mm
20	4210 mm	39	8010 mm
21	4410 mm	40	8210 mm
22	4610 mm	41	8410 mm
23	4810 mm	42	8610 mm
24	5010 mm	43	8810 mm
25	5210 mm	44	9010 mm

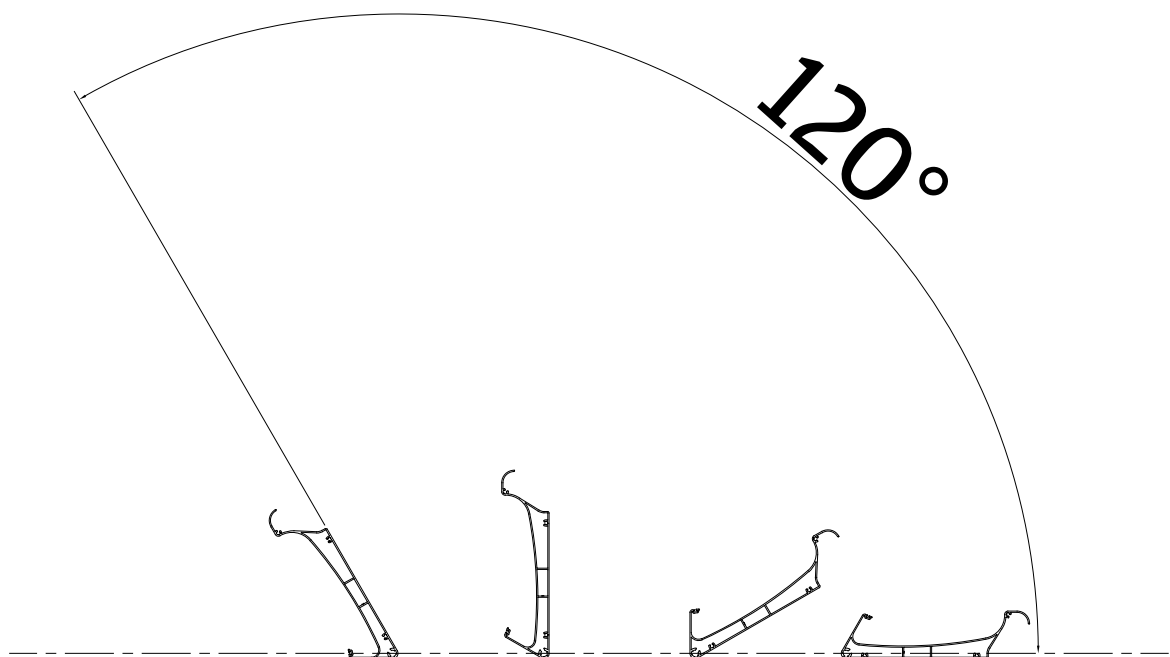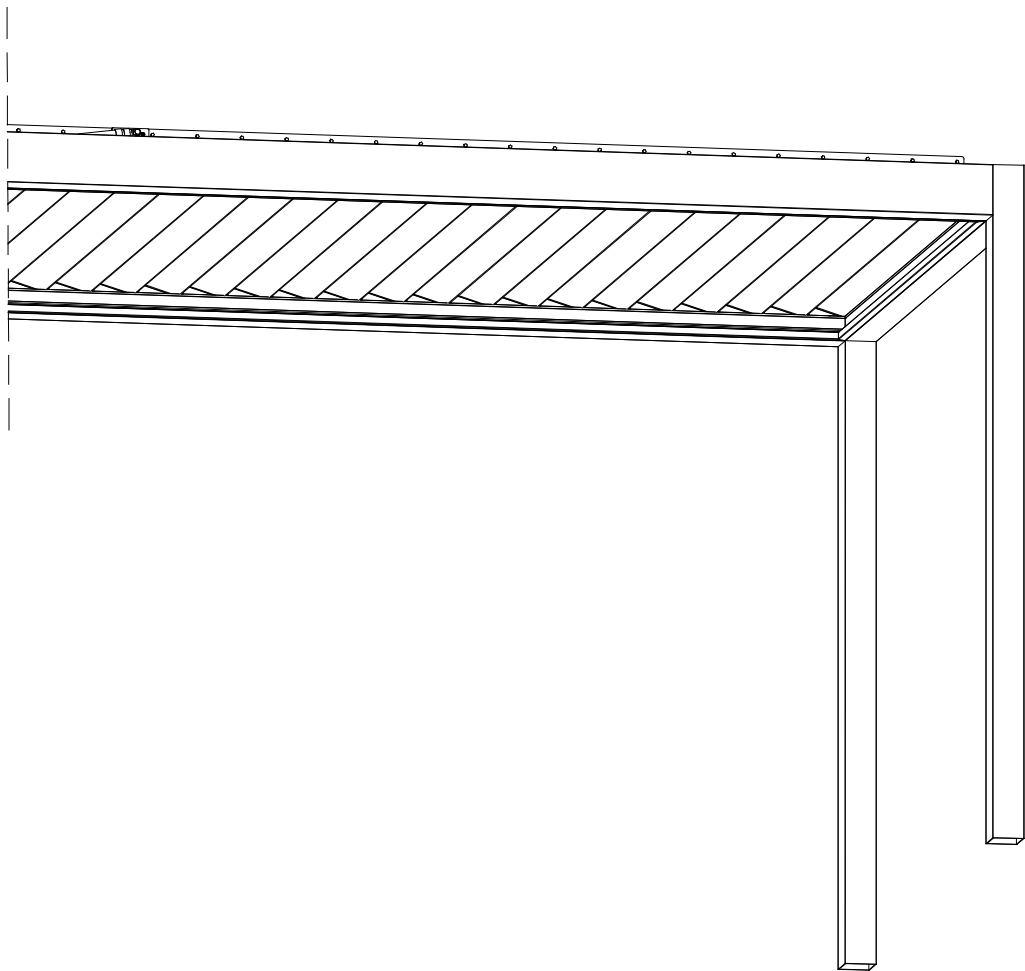


The Louvres opening angle moves from zero to 120 degrees.


Water flow and Sealing details

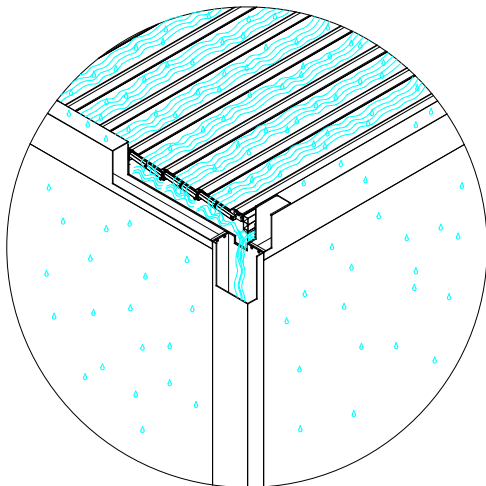


Drainage of water from louvres with the help of gutter to the post

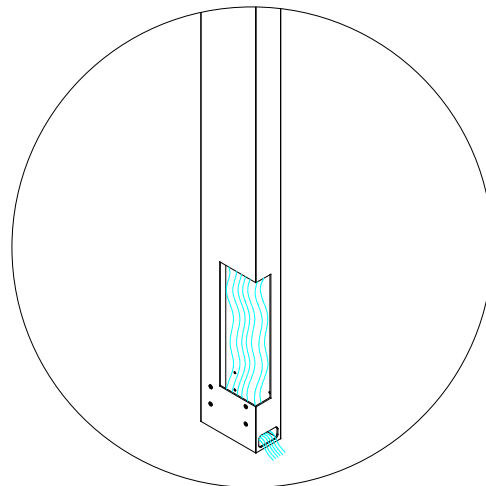

Evacuation of water in the posts

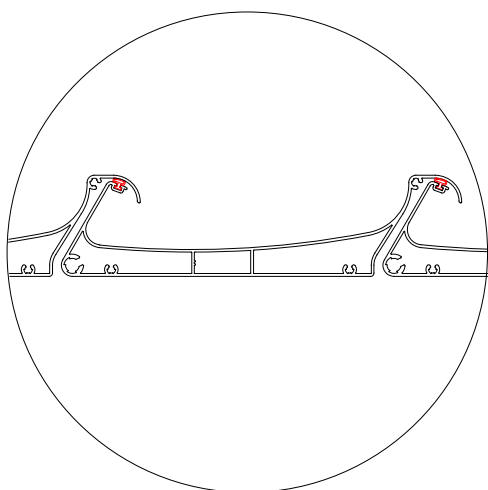


When closed from the panels, it provides sealing thanks to the wicks.

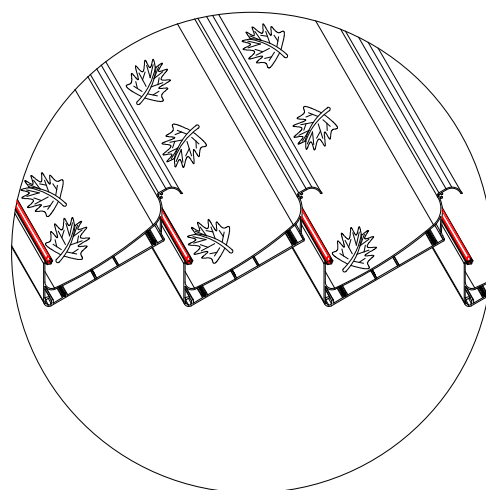


The open state of the panels, the appearance of the wicks and the special design that prevents the entry of leaves, water, etc.


Connection details

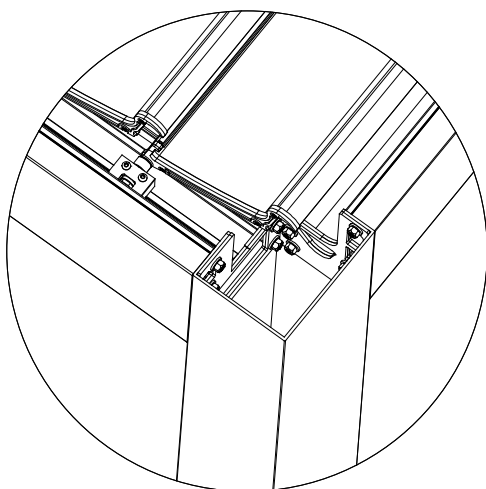


Rafters are fixed to the posts by M8 setskur with M8 nut and washer

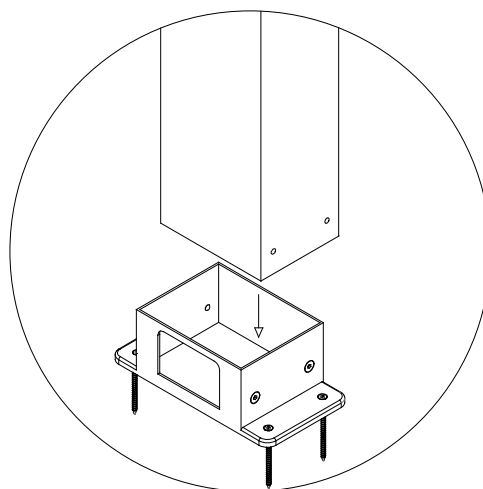

Floor mounting tools are fixed to the ground with bulldex screws and the uprights are inserted into the apparatus and first drilled with $\varnothing 5$ drill and then m6 thread is removed and fixed with M6x20 countersunk head imbus screw DIN7991.


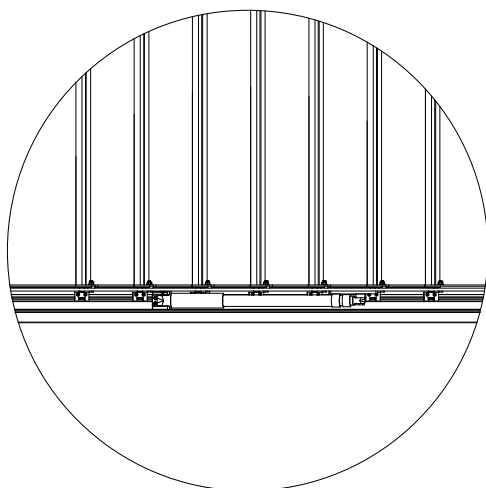


Motor connection detail

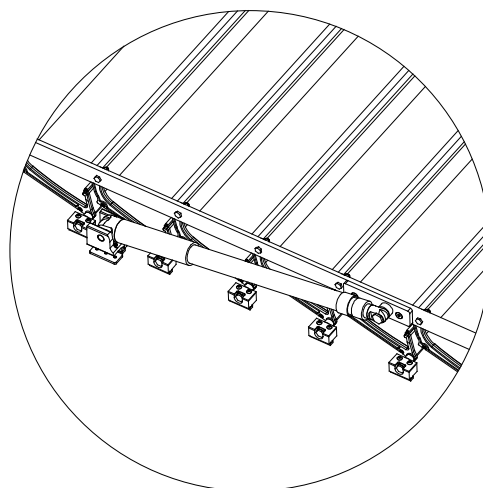

Motor connection detail

Lighting details

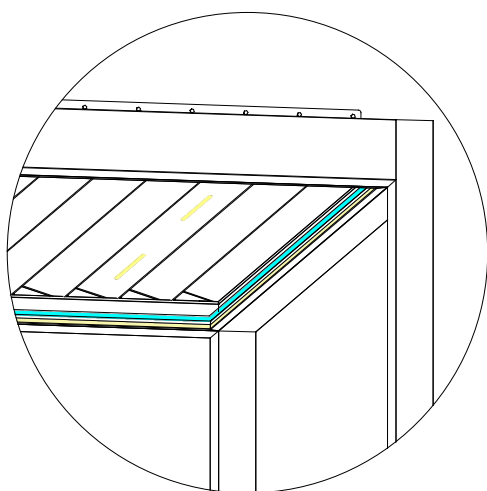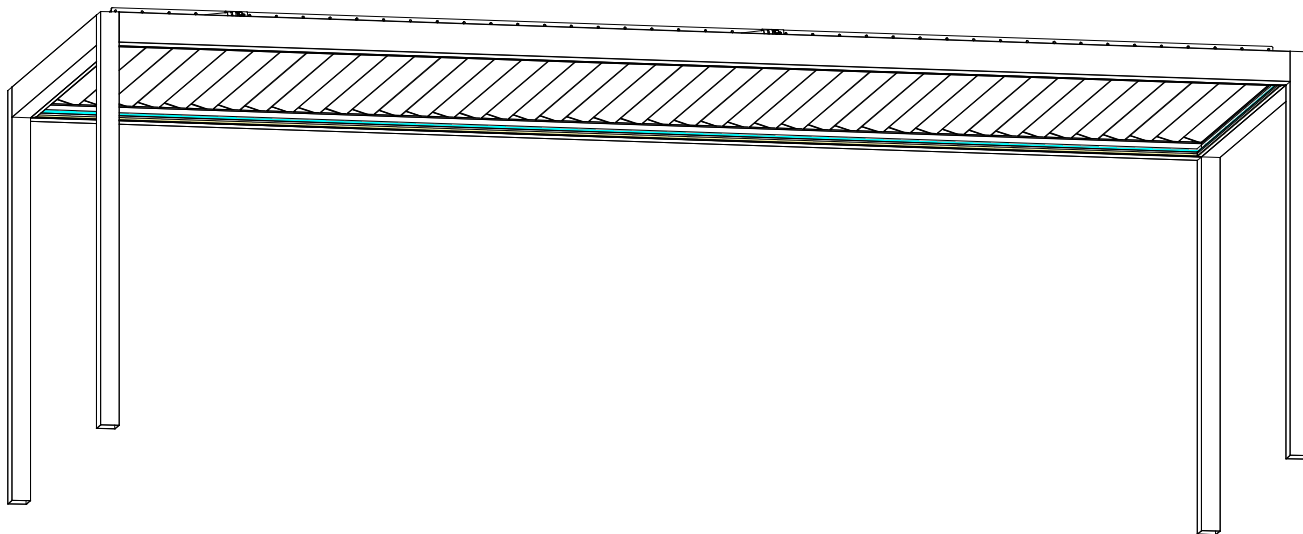

In addition to the daylight and RGB ambient lights surrounding the product, 3 different lights can be used simultaneously with the integrated LED light system on the panels.



Osmangazi Mh. 2626 Sk. No:9/2
Esenyurt 34522 İstanbul / Türkiye

risingoutdoor.com |    risingoutdoor | 90 212 444 1 886