





Single module system dimensions

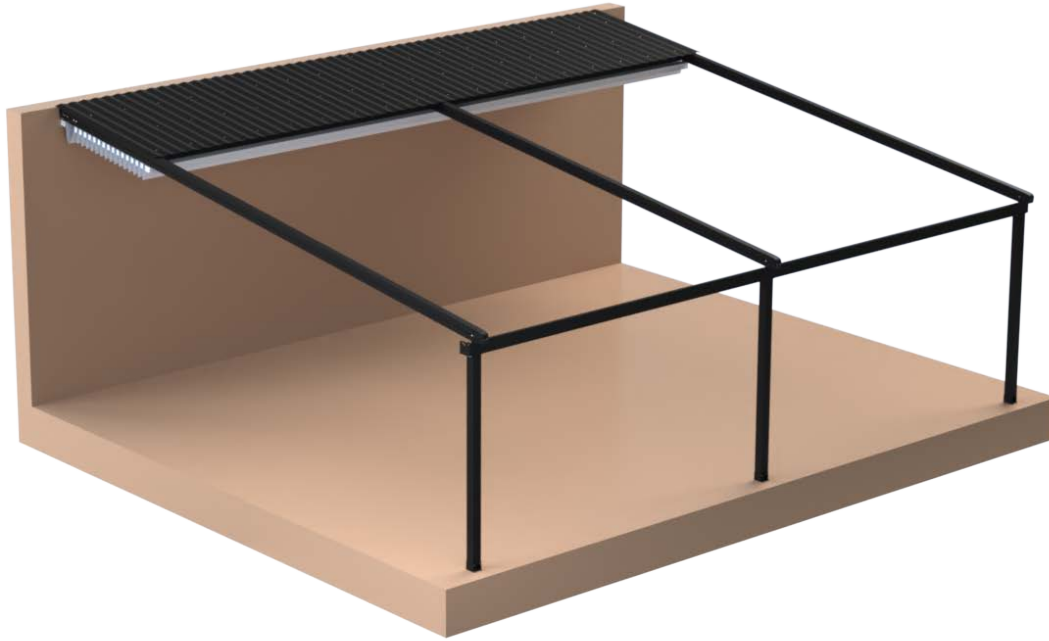


The maximum distance between two rafters is 4000 mm
The maximum width is 8000 mm.

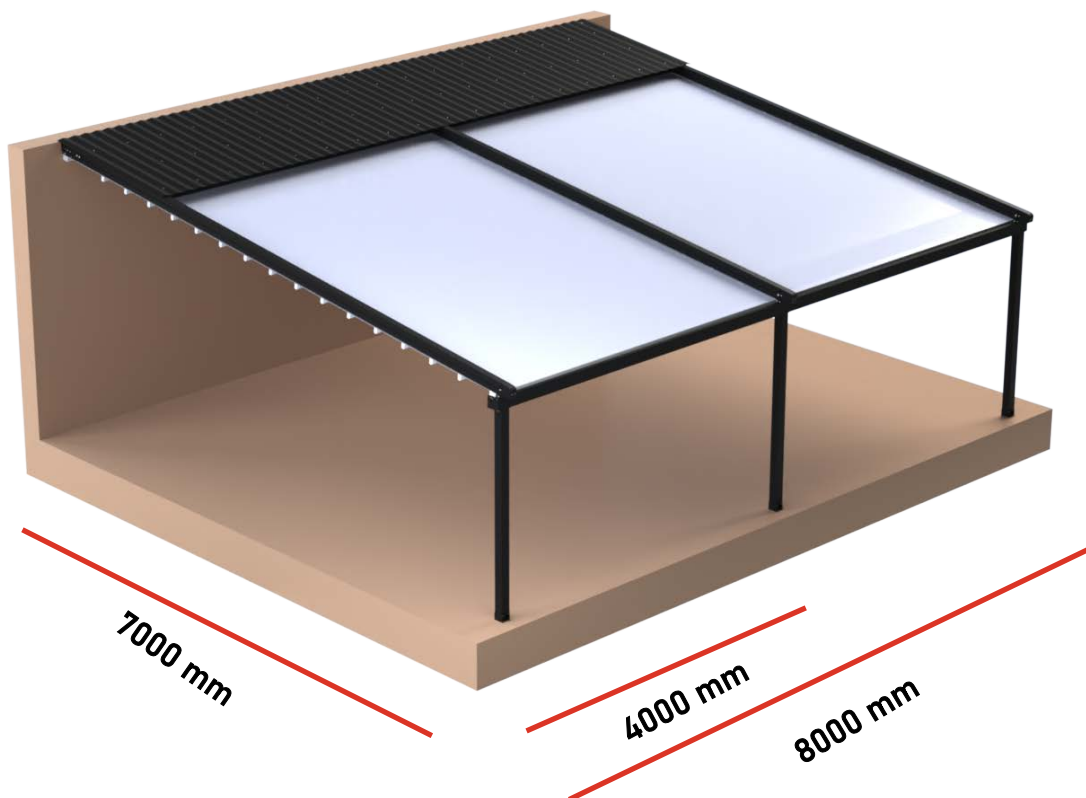


Note: Since our systems are modular, they can be manufactured in any desired size by adding units side by side if a larger size is required. The number of front columns will be calculated by our company according to the project requirements.


Profile section details

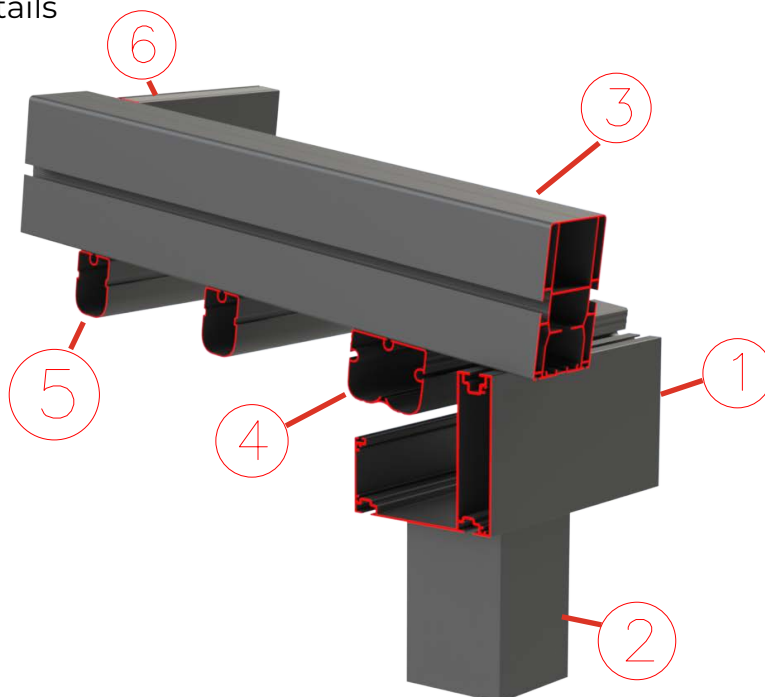


① GUTTER PROFILE

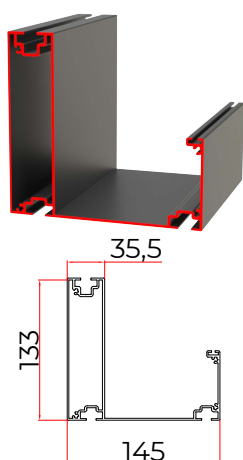


② POST PROFILE

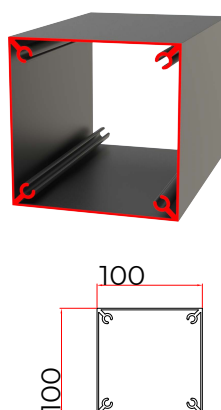

③ RAFTER PROFILE

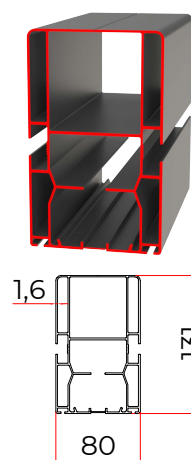


④ THICK FABRIC PROFILE

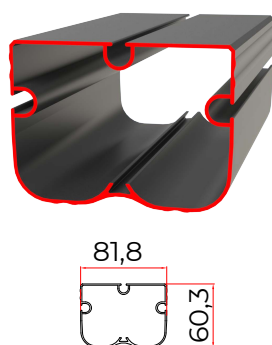

⑤ THIN FABRIC PROFILE



⑥ ROOF BEAM PROFILE

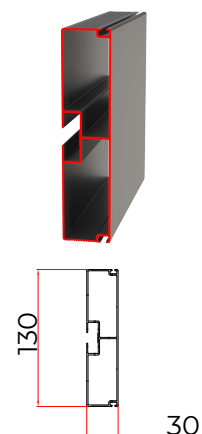



Note: Since our systems are modular, they can be manufactured in the desired size by adding units side by side if a larger size is required. The number of front posts will be calculated by our company according to the project requirements.




The connection between the rafter and the gutter is made with specially designed L brackets.

Four M8 bolts are used for the connection between the post and the gutter.





Four 7.5x100 Buldex screws are used to secure the ground mounting brackets.

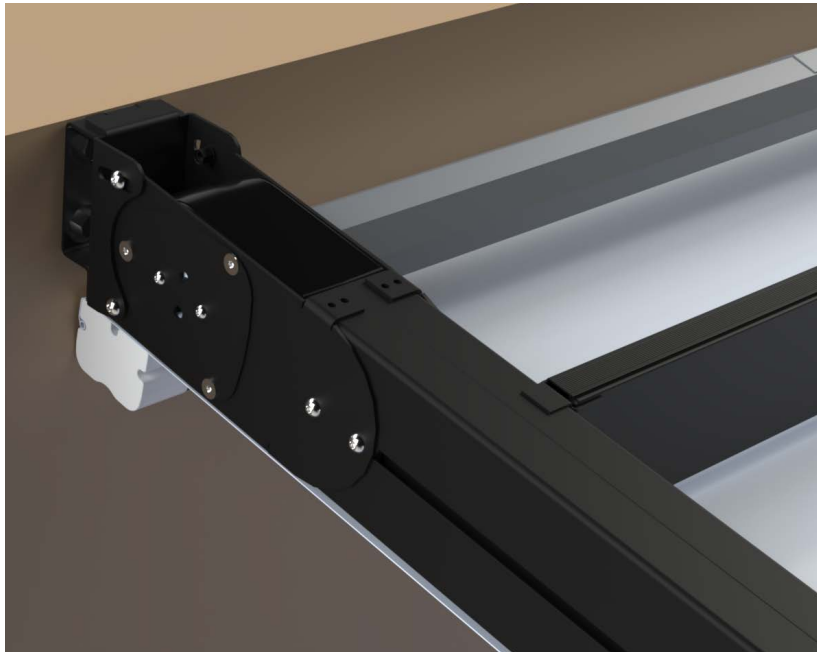


The rear connection brackets allow the product to tilt between 7° and 13°.

In the Pergo Rise product, the motor transfers its power to all rafters evenly through an octagonal tube.

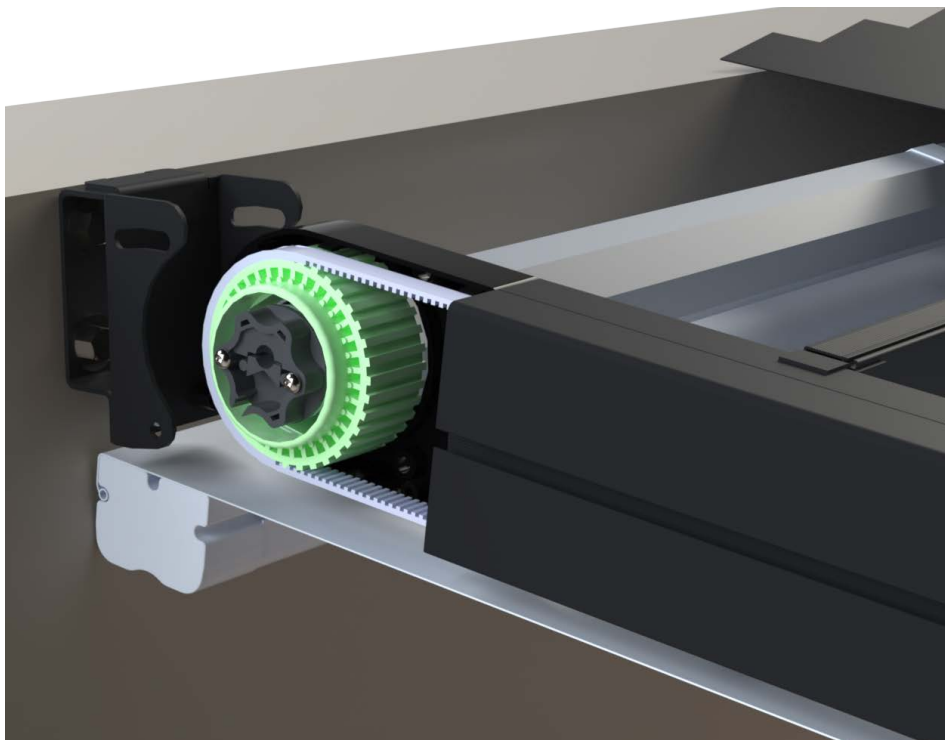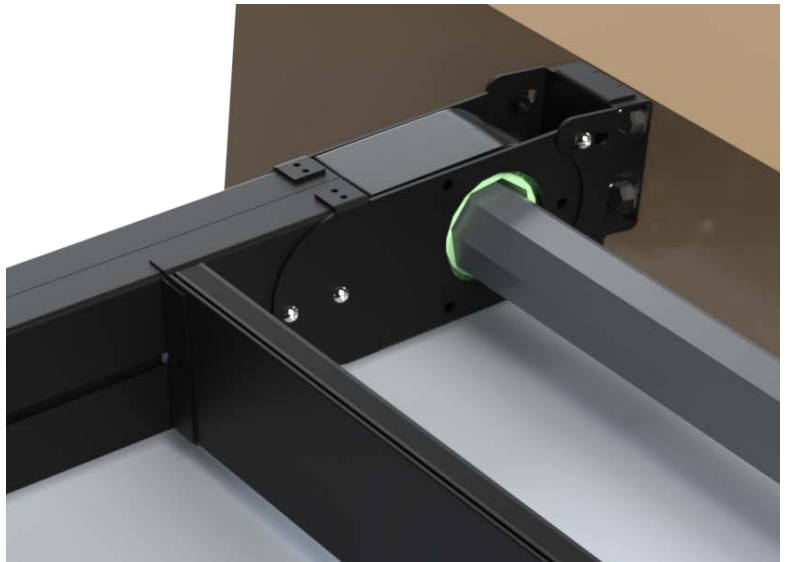


The power from the motor is transferred to the timing belt through special gears.

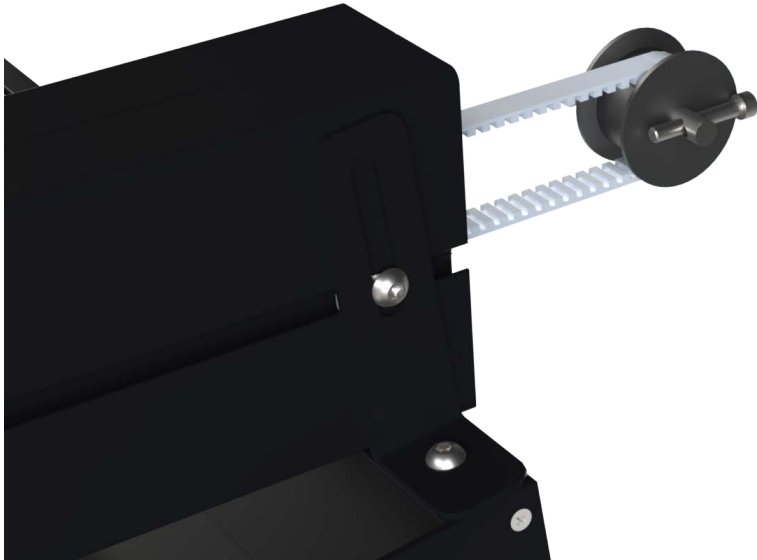

The belt tension can be adjusted via two screws located at the front of the product.

Thanks to specially designed carrier carriages, it offers a long service life.

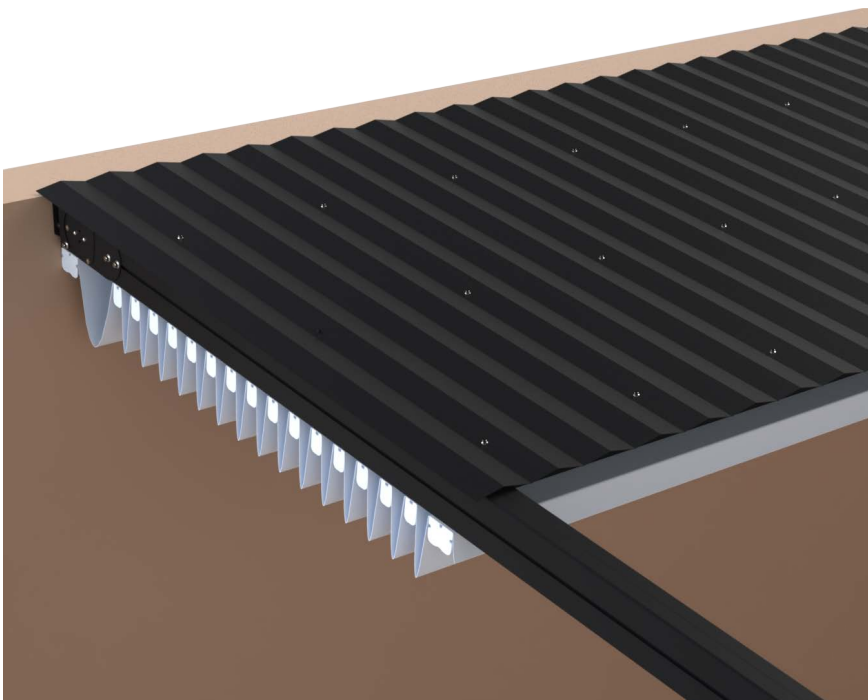

Thanks to the long trapezoidal sheets used, the fabric is protected from getting dirty when the product is in a closed position.

Lighting Details



The integrated lighting system in the thin fabric profiles illuminates the area without disturbing the aesthetics.





Akçaburgaz Mh. 3132 Sk. No:11-13
Esenyurt 34522 İstanbul / Türkiye

risingoutdoor.com |    risingoutdoor | 90 212 444 1 886