





UNIFOLIATE MINIMA

T1/301019

SINGLE MODULE SYSTEM MEASUREMENTS

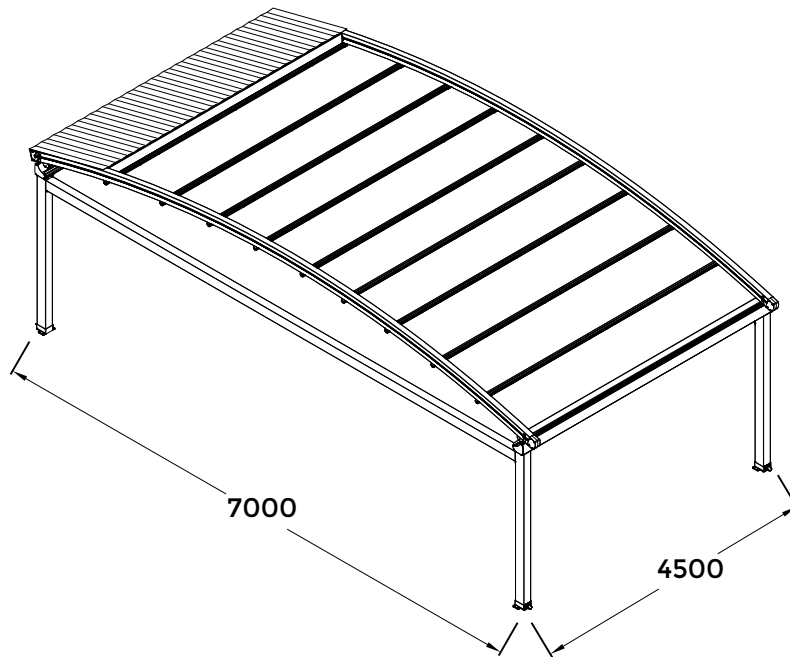


The maximum width between any two rafter is 4,5 mt .

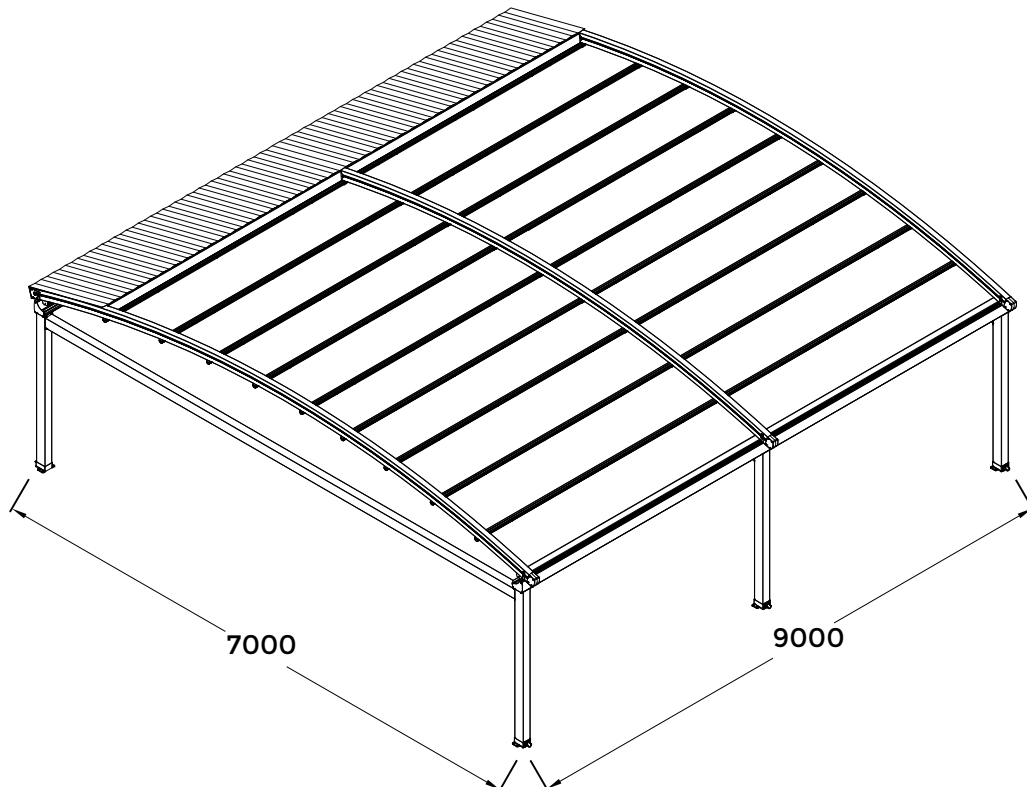

The module with 9Mt width has 3 rafters and the distance between the rafters is 4,5Mt.



Note: As our systems are modular system, we can go beyond the standard width by adding additional modules to the existing modules. The numbers of the front posts will be determined in line with system specifications.

Single Module Systems measurements.

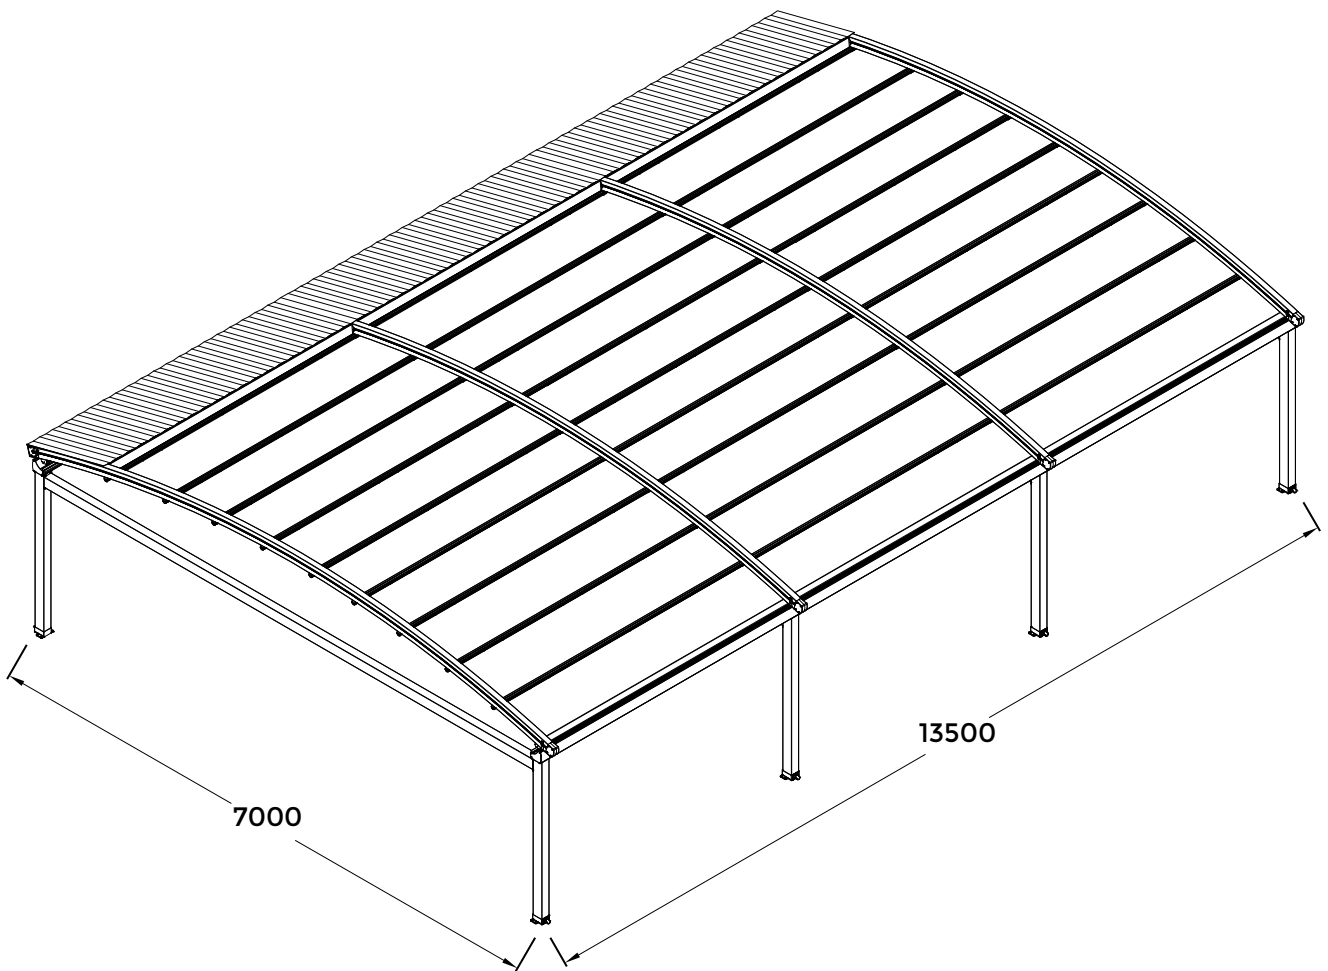


The module with 13,5 Mt width has 4 rafters and the distance between the rafters is 4,5Mt.


Note: As our systems are modular system, we can go beyond the standard width by adding additional modules to the existing modules. The numbers of the front posts will be determined in line with system specifications.

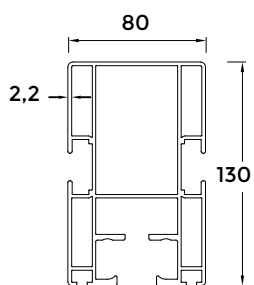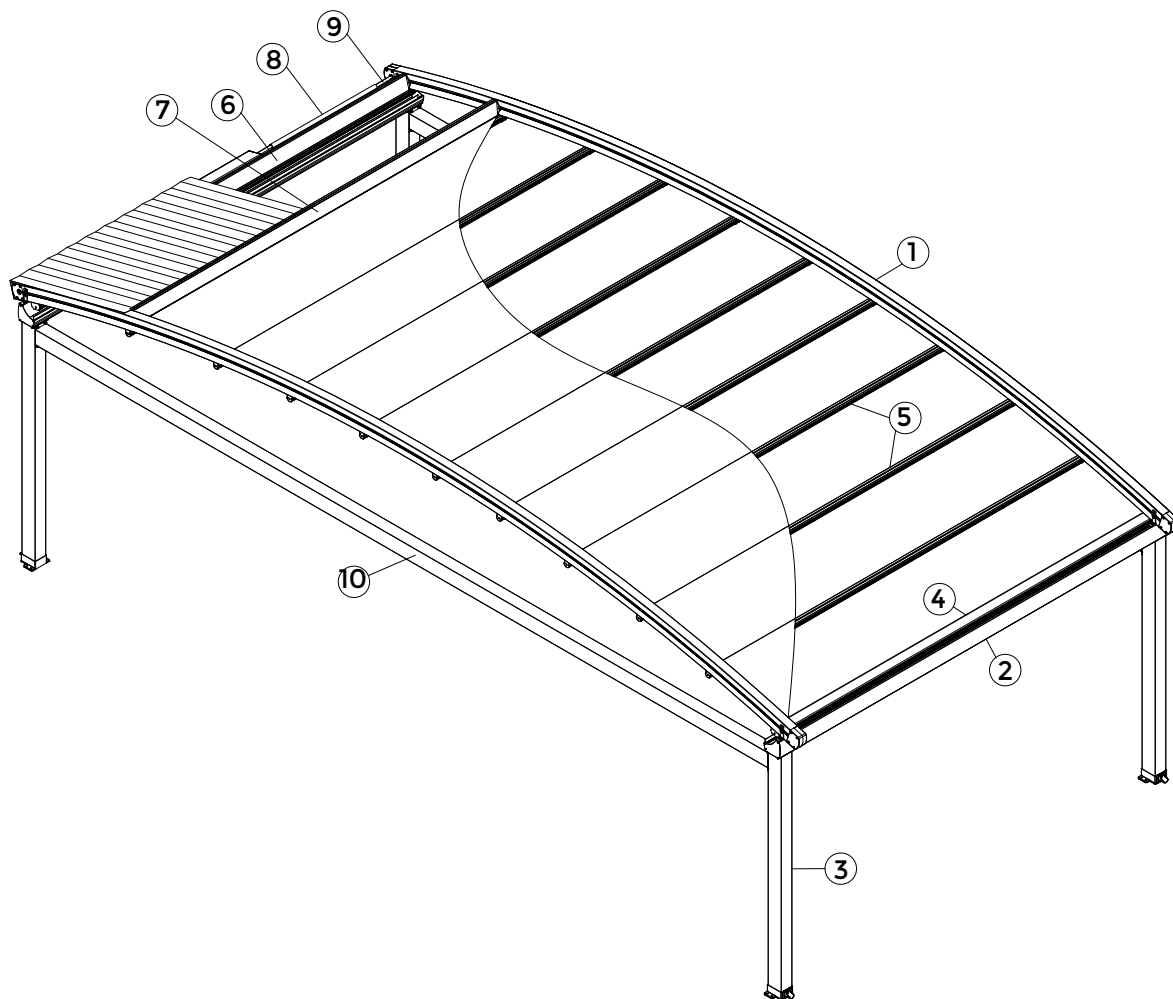


1- Rafter Profile

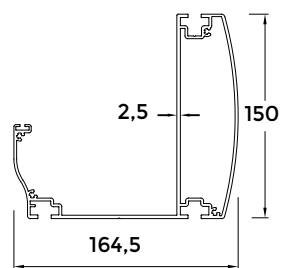


2 - Gutter Profile




3 -Front
Carrier Post




4 - Puller Profile




5 - Fabric
Support Profile

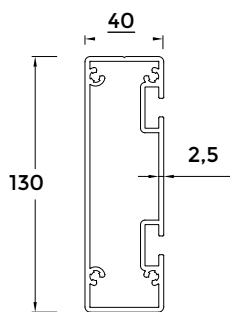


6 - Motor Profile

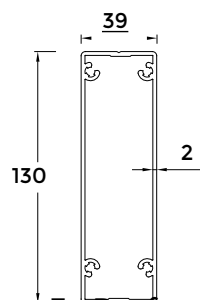


7 - Roof
Joining
Profile




8 -Thick
Shaft
Profile




9 - Thin Shaft Profile





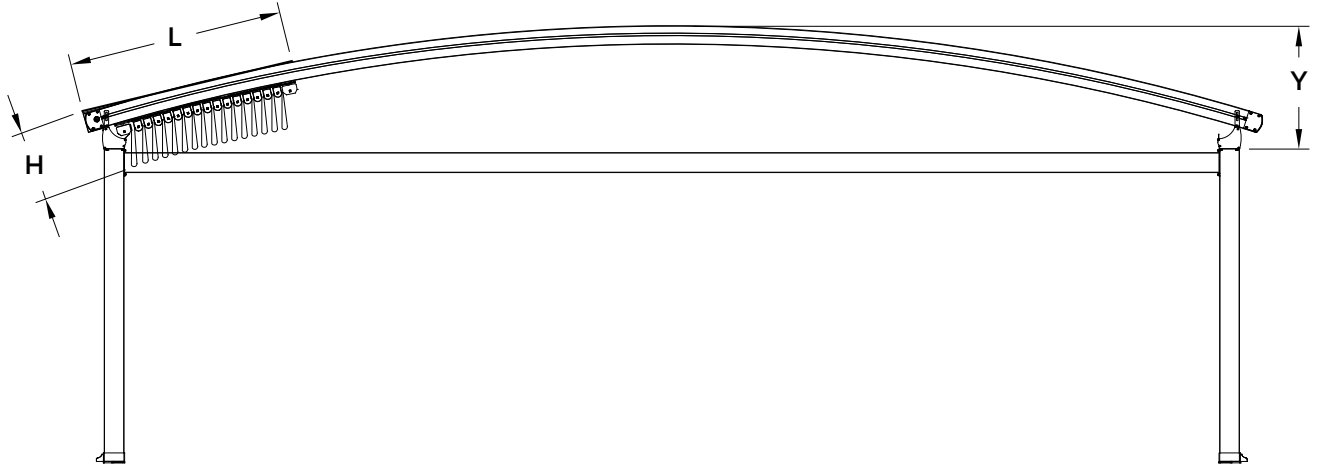


UNIFOLIATE MINIMA				
DIMENSION	FABRIC HEIGHT	CORRUGATED TOP PLATE	FALL	FAB.SUP. PROFILES
PROJECTION	FABRIC HEIGHT	CORRUGATED TOP PLATE	INCLINATION HEIGHT	NUMBER OF PROFILES
CM	(H) CM	(L) CM	(Y) CM	PCS
300	41	66	50	8
350	41	73	52,6	9
400	41	80	56,1	10
450	41	87	59,6	11
500	41	94	63,1	12
550	41	101	66,6	13
600	41	108	70,1	14
650	41	115	73,6	15
700	41	122	77,1	16

Profil araları 50cm,Açı 8 dereceye göre hesaplanmıştır.

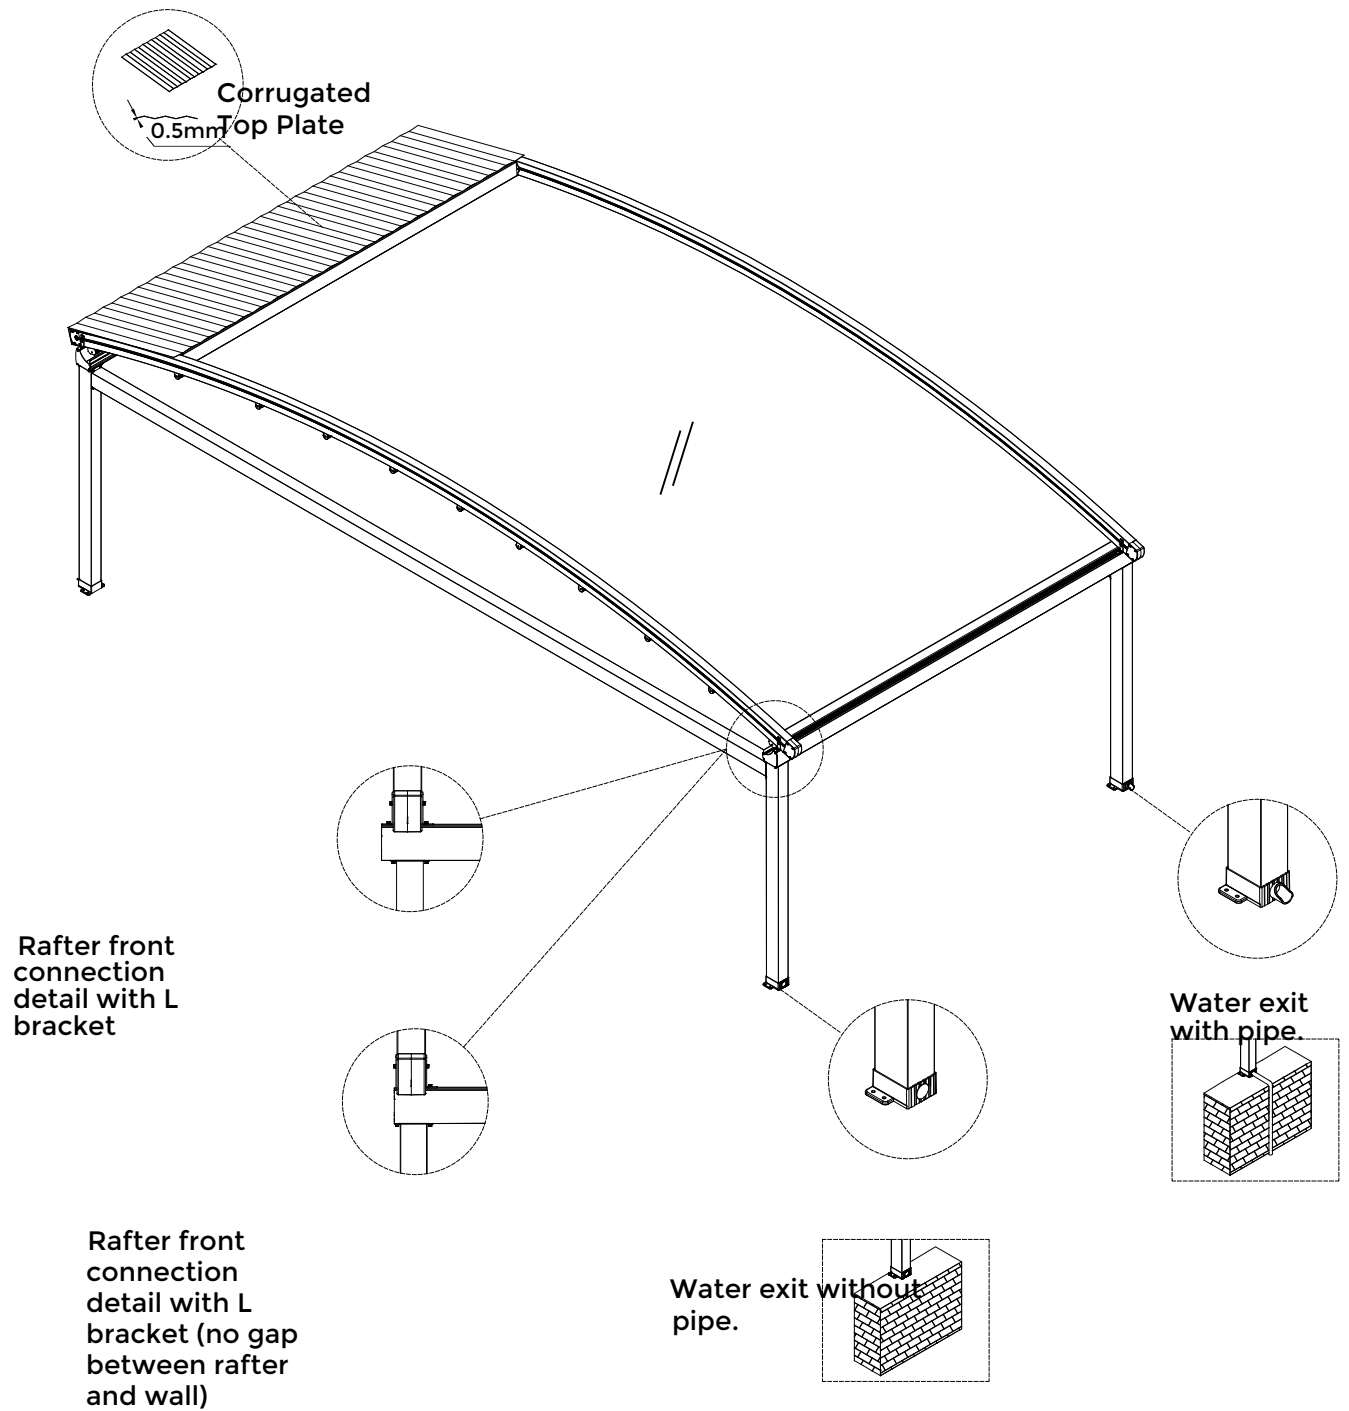


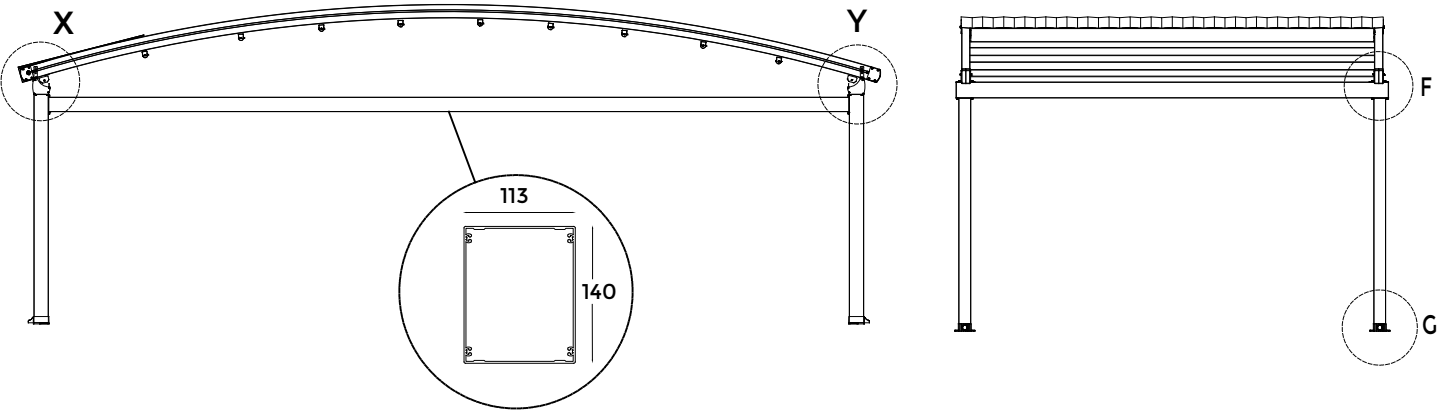


X
Detailed view




Y
Detailed view




F
Detailed view




G
Detailed view

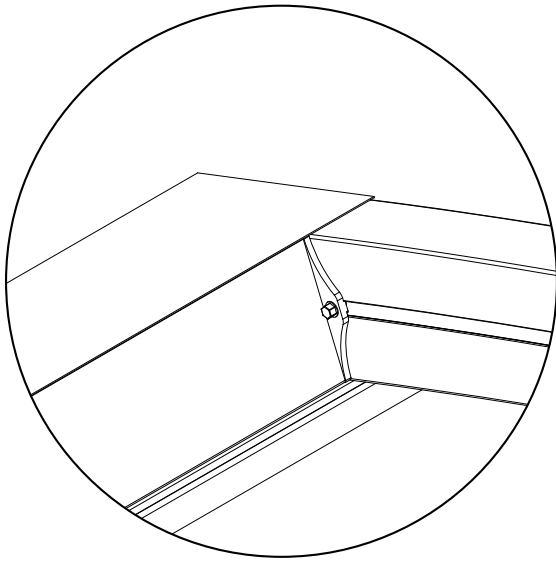


**Connection
details**

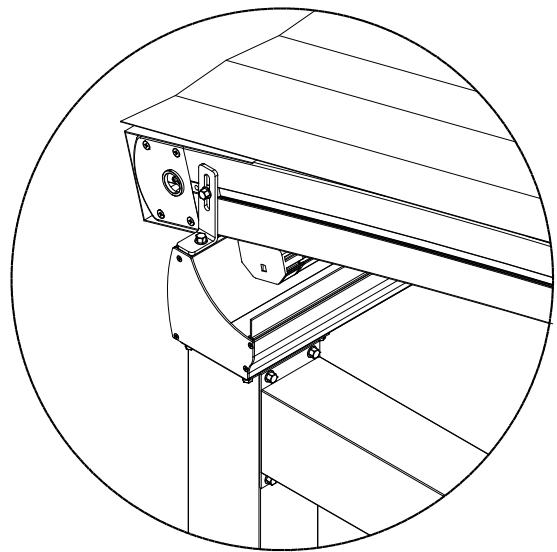


**Back Rafter
Detail**

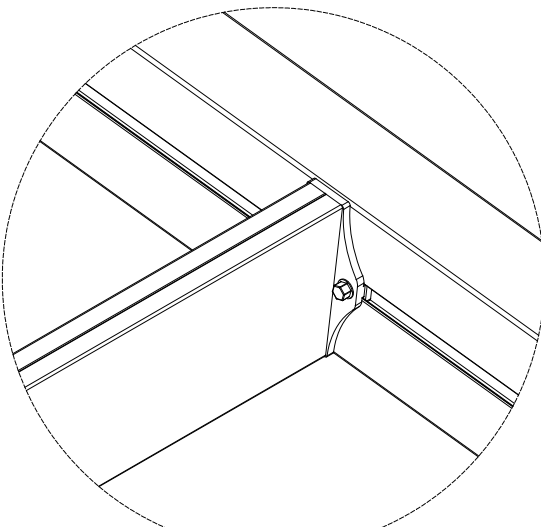


**Roof Joining Profile
Connection detail**

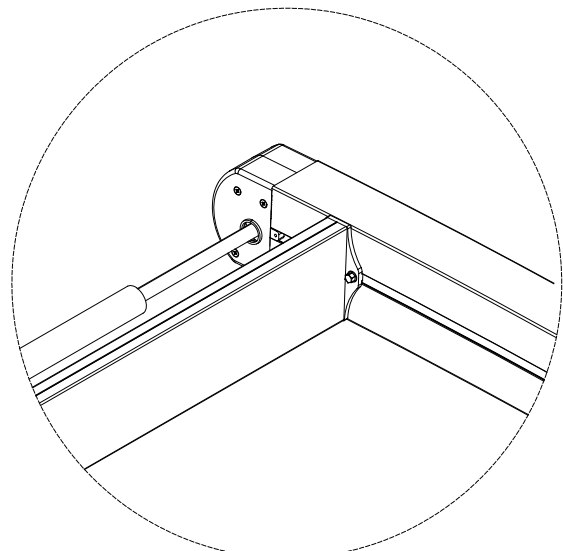


**The detail of
shaft profile
while inserted
into gear box**

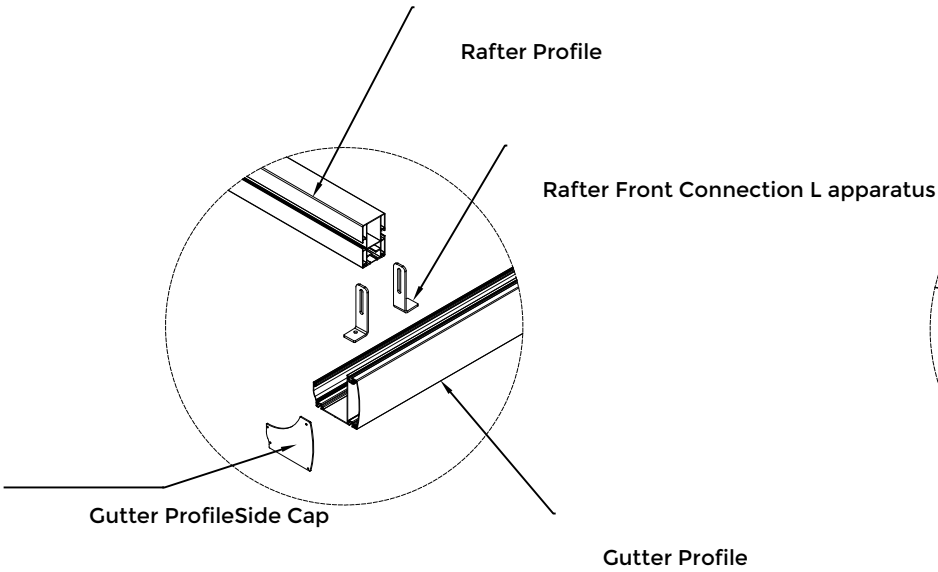


**Rafter & Gutter
connection
detail- 1**

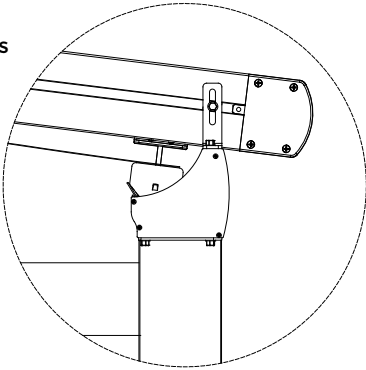


**Rafter & Gutter
connection
detail -2**

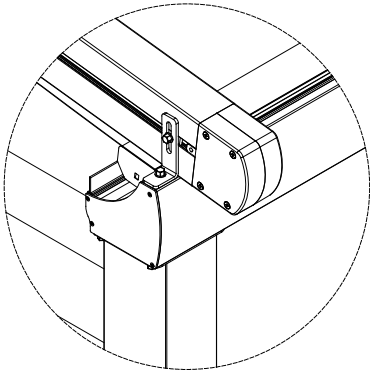


**Rafter & Gutter
connection
detail- 3**

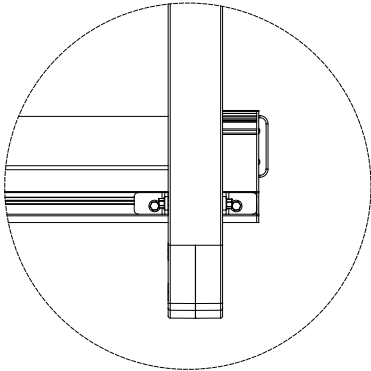


**Rafter & Gutter
connection
detail- 4**

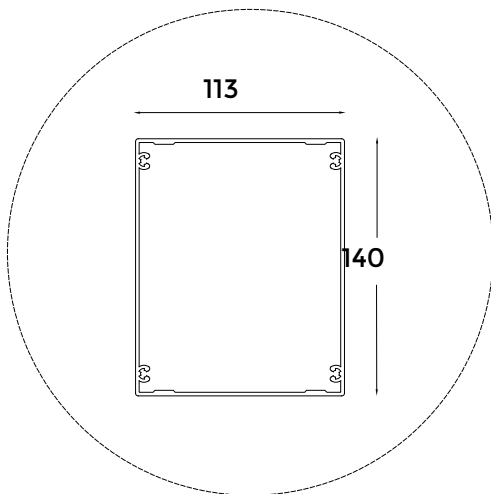

**Front Post
detail**

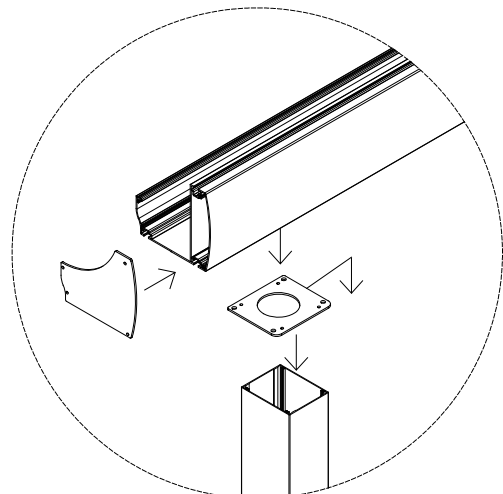


**Front Post &
Gutter Profile
connection detail**

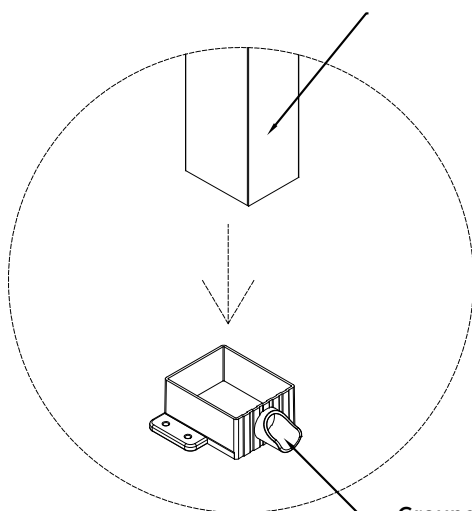


**Ground Installation
Part detail**


Ground installation Part

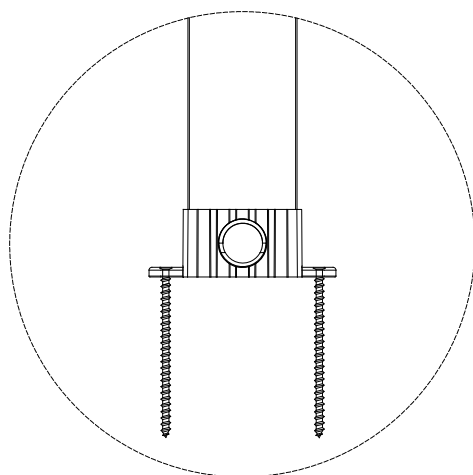


**Front Post &
Ground Installation
Part connection
detail**

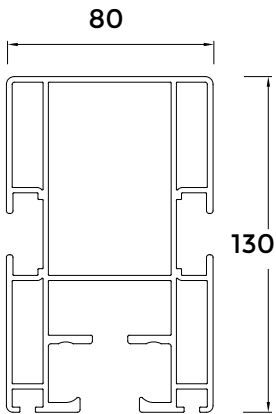


Rafter Profile detail

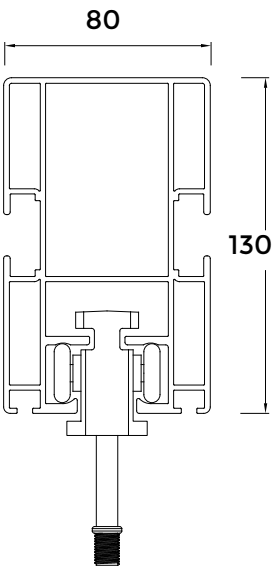


Conveyor car
operating in the
Rafter Profile

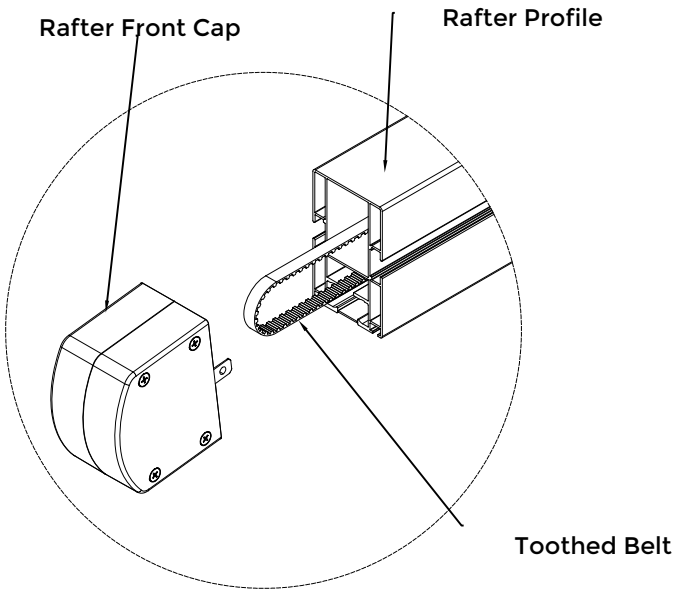


Toothed Belt
operation
detail

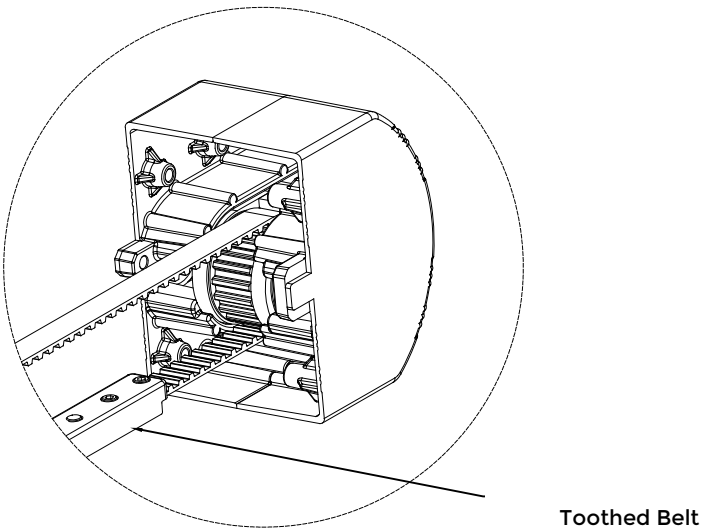


Rafter front cap
interior
mechanism
details

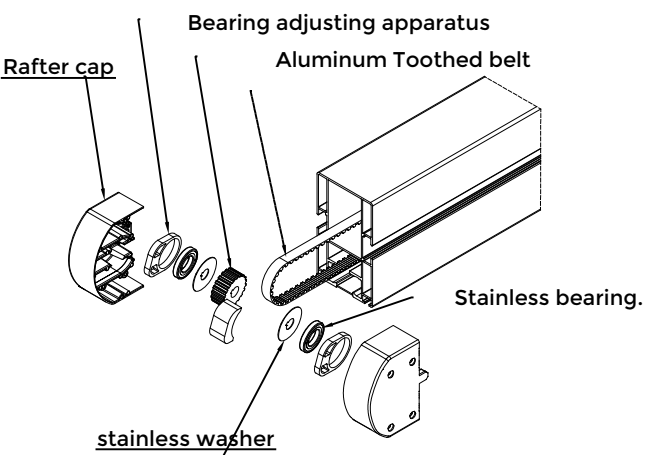


Rafter back
Connector
details

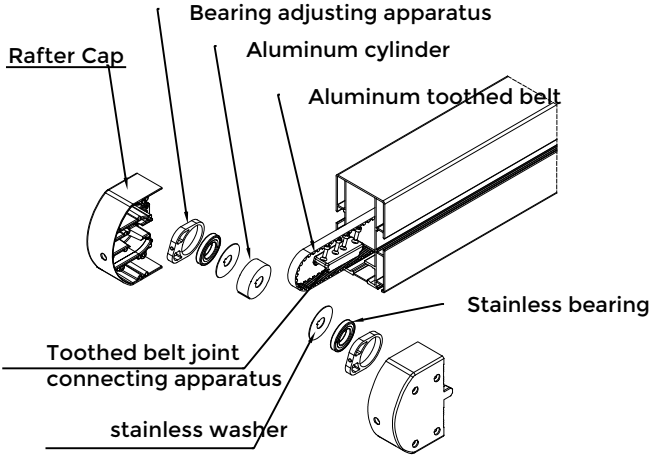


Rafter Front Connector details

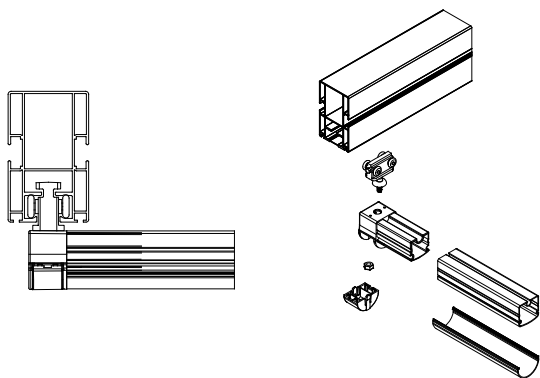


Fabric Support
Profile plastic
connector for
sides.

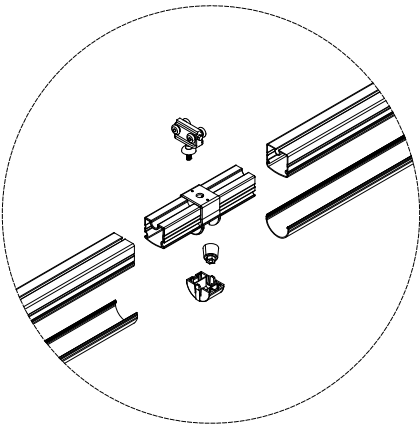


Fabric Support
Profile plastic
connector for
middle part.

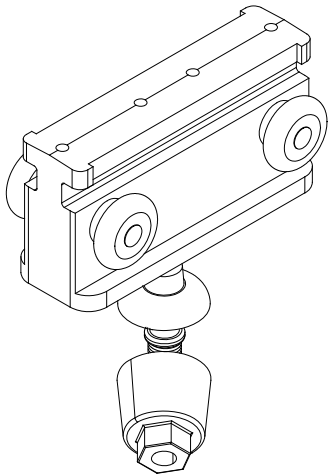


Main Puller Car

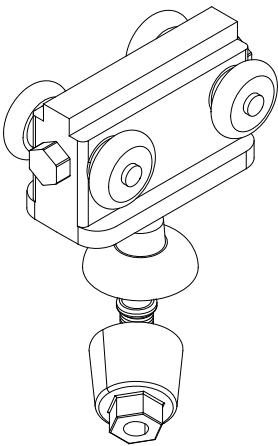


Fabric Puller car

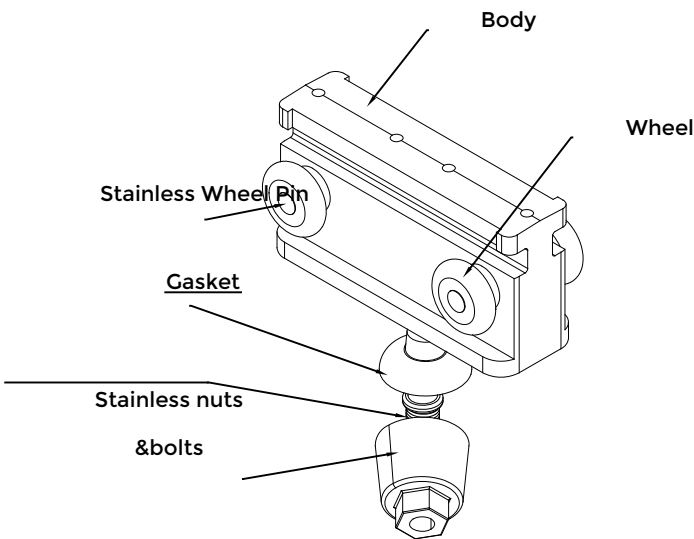


Special designed
Main Puller Car
with four wheels

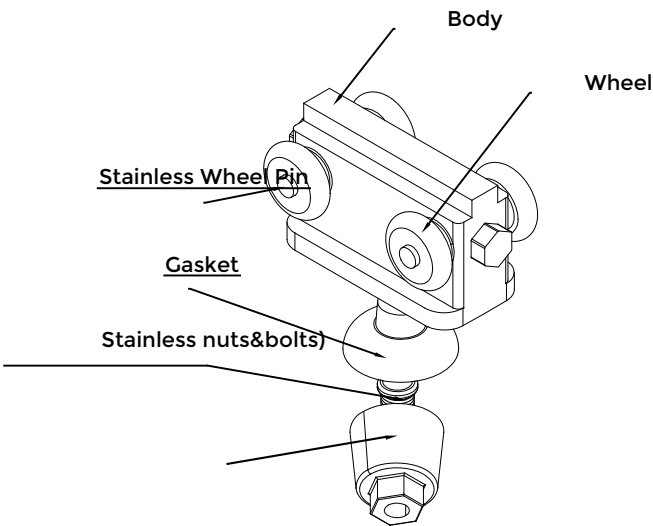


Special designed
Fabric Puller Car
with four wheels

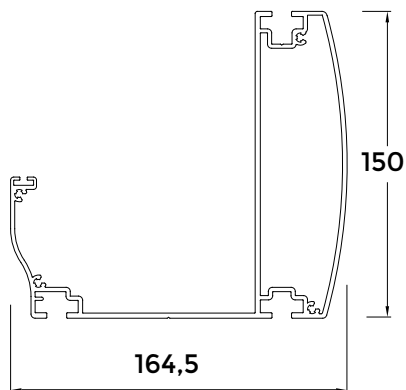


Special designed Gutter profile with increased water disposal capacity

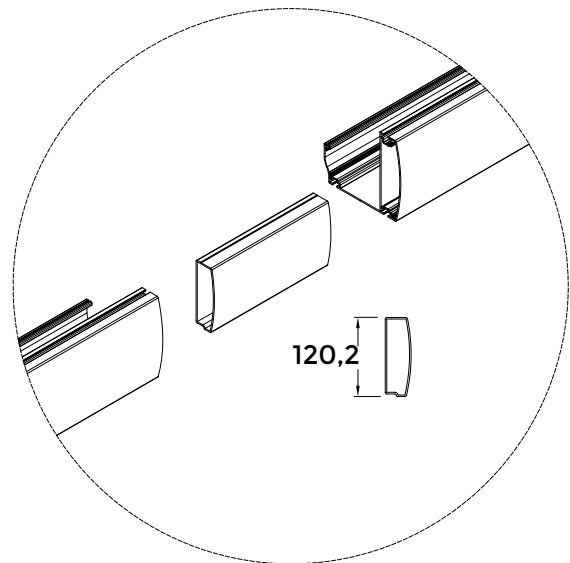



Gutter profile connecting profile detail.

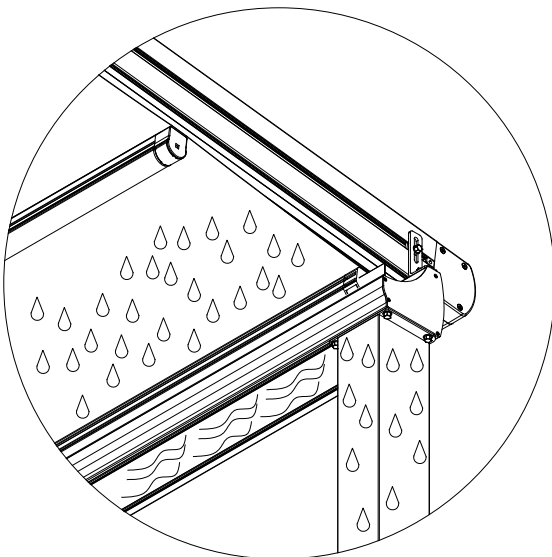

The detail of water draining through several components


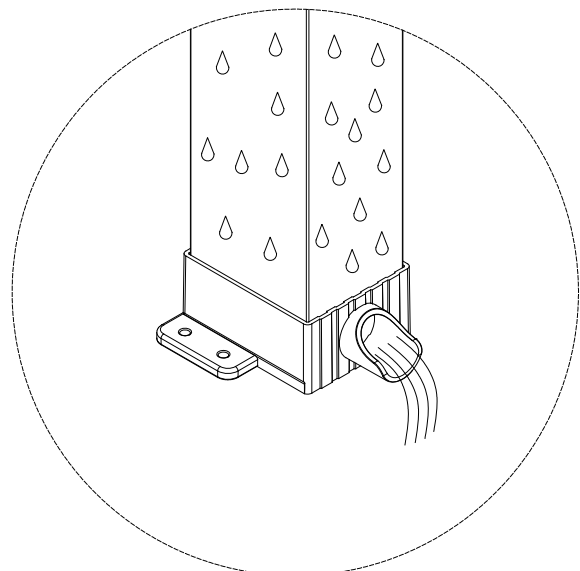


Front Post water disposal details

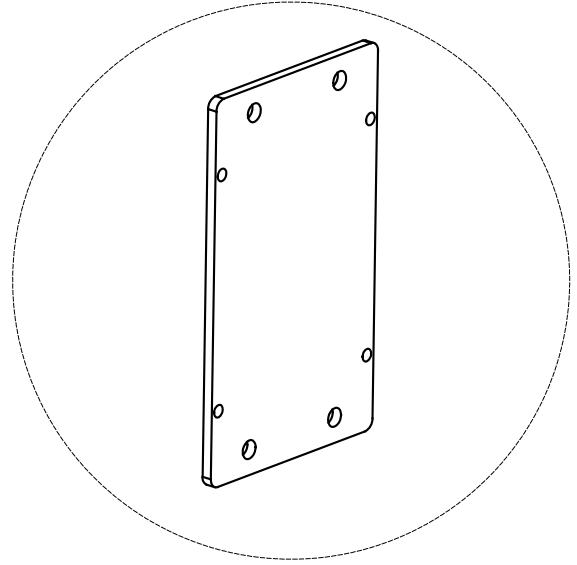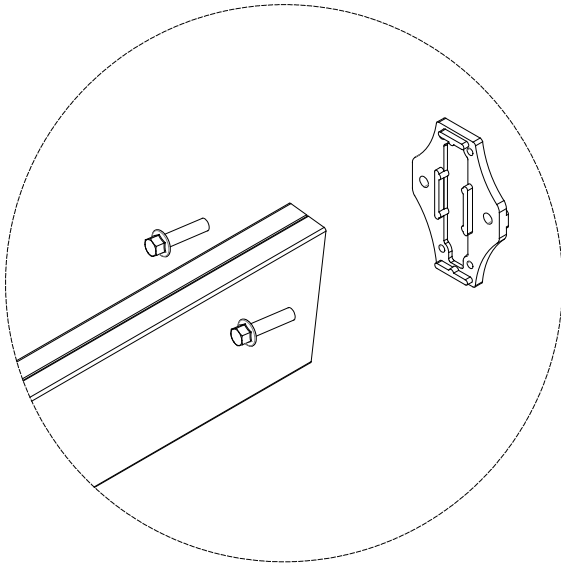



**Motor and
Roof Joining
Profile
connection
details**

4ékĩĩ ìékηύð ì ççòÁúé, —, ijkúé

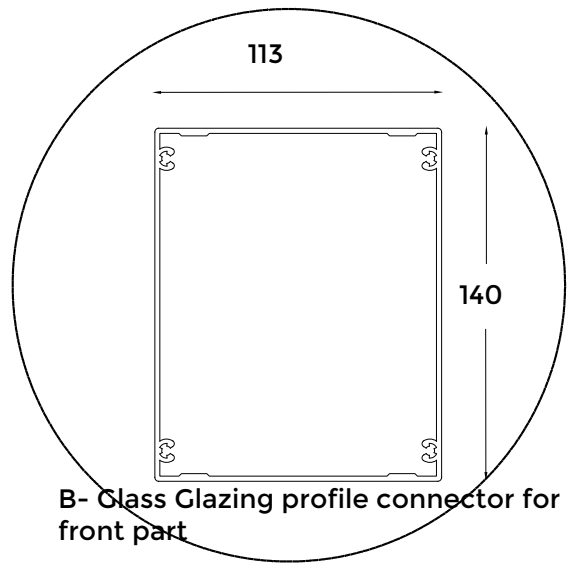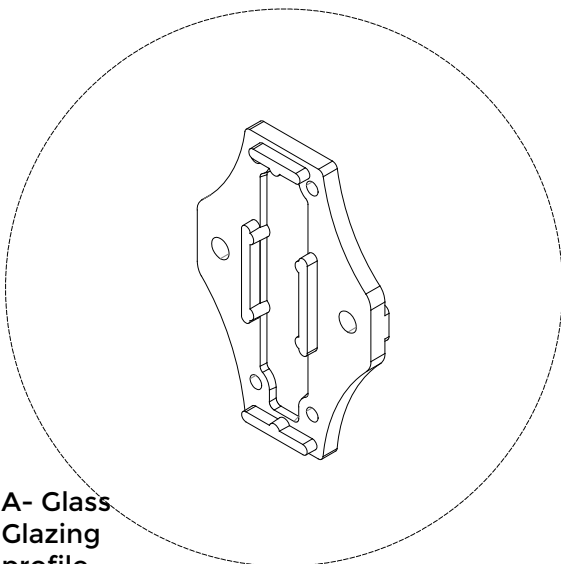


**A- Glass
Glazing
profile
connector for
back part.**


**B- Glass Glazing profile connector for
front part**

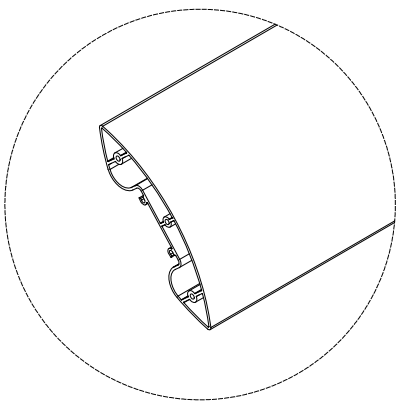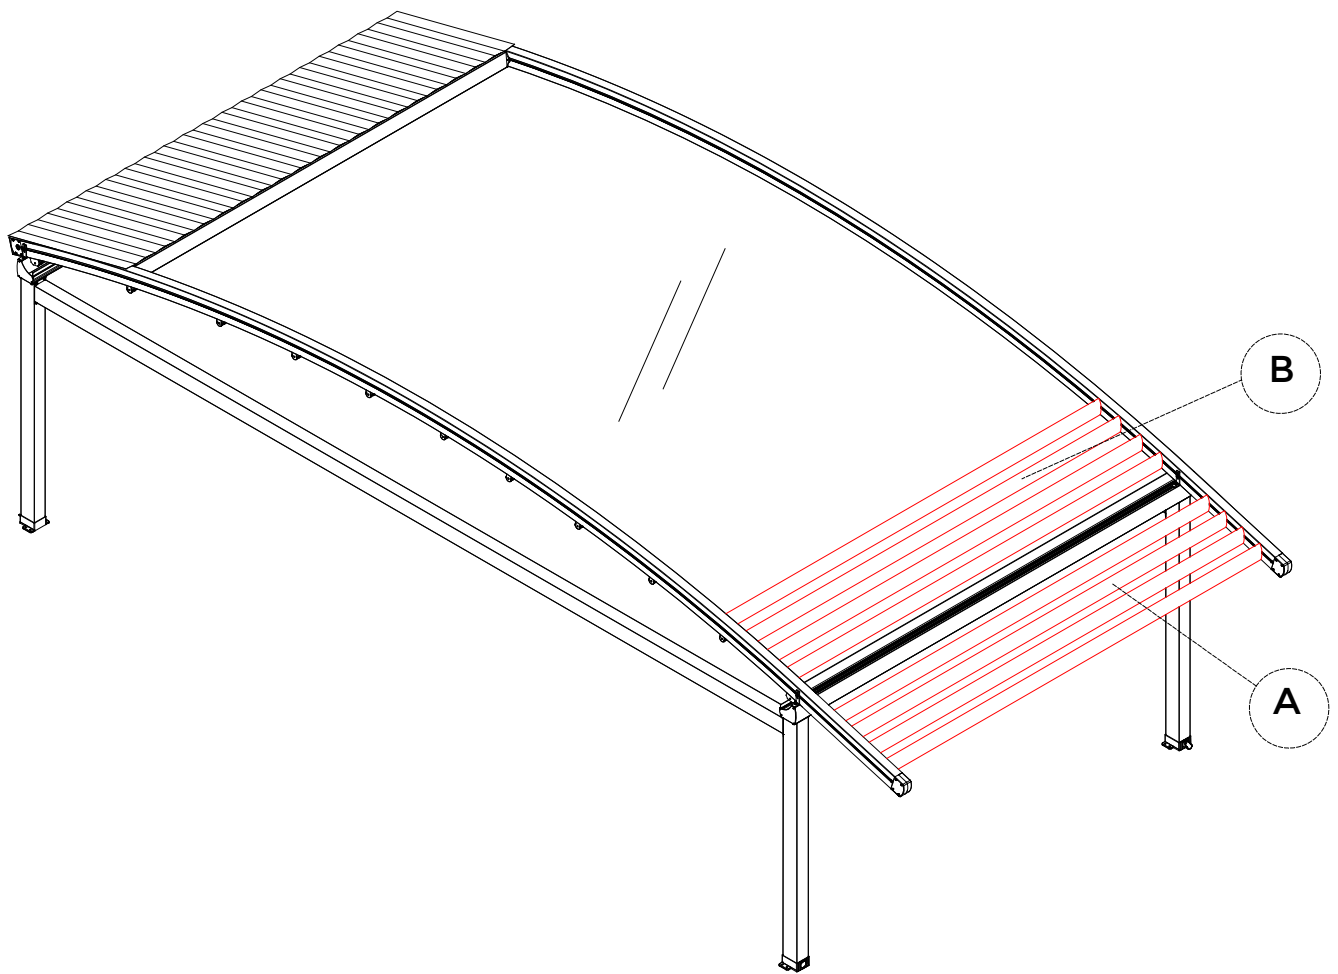


**A-Sun Blocker detailed view-
without channel for lighting system**

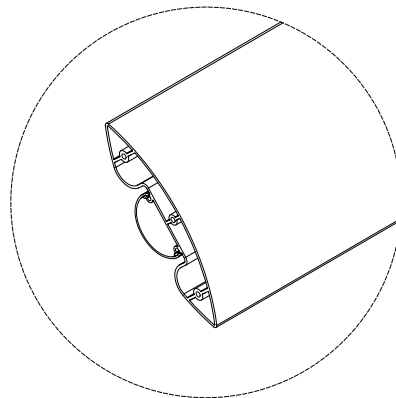


**B-Sun Blocker detailed view-
with channel for lighting
system**

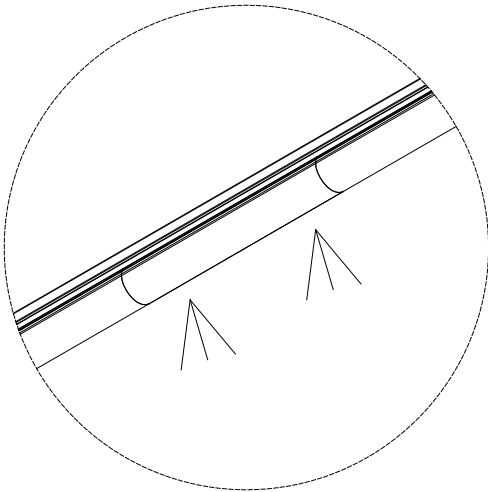


Fabric support profile with high tech linear lighting system embedded in the profile.

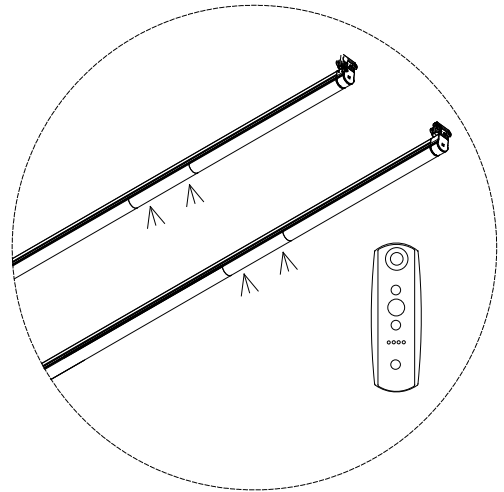


when required the lighting system can be equipped with dimmer to vary the brightness of the lighting system.

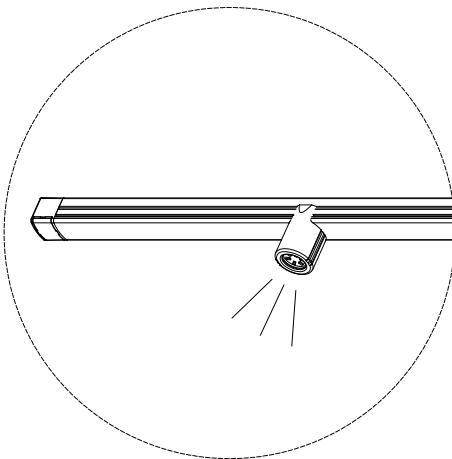


Specially designed Spot Lighting System integrated into fabric support profile.

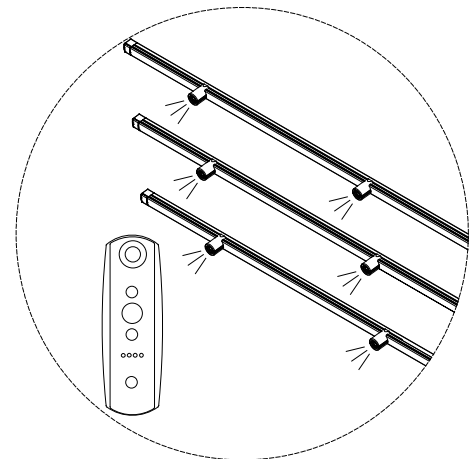


When required lighting system can be equipped with a dimmer option to vary the brightness of the lighting.

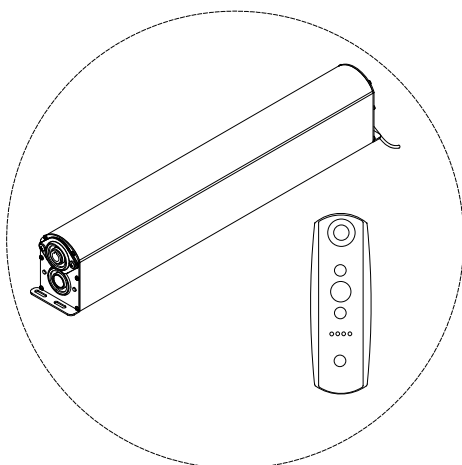


Specially designed motor box equipped with special apparatus both inside and outside the box ensures your motor to reach to its maximum capacity as well as to increase its durability.

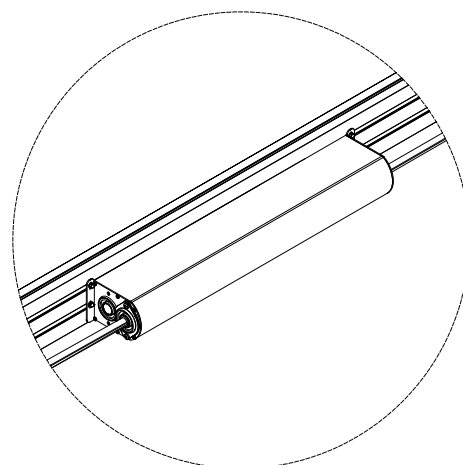


The connection details of motor box to the back motor profile.

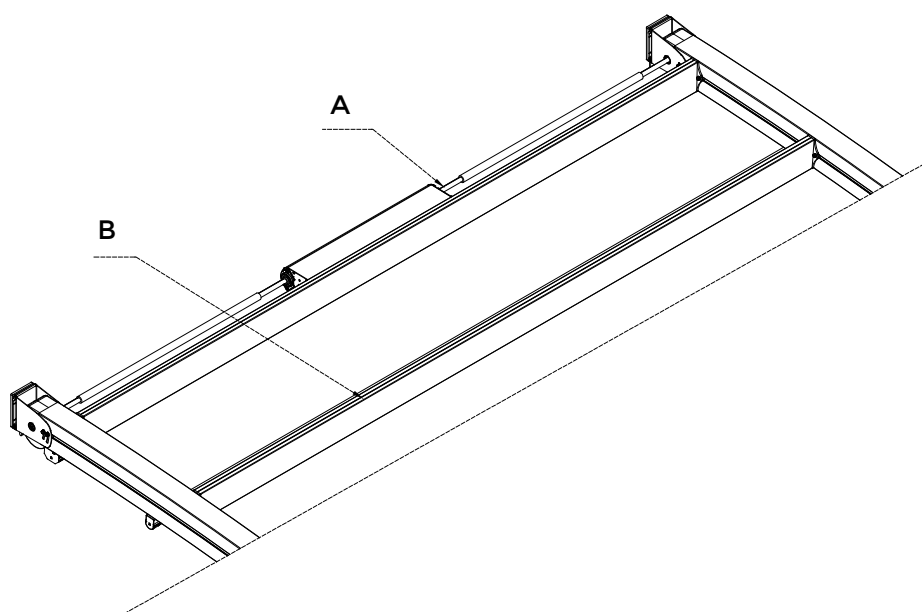


A- Motor box shaft profile connections.
B- Roof joining profile connection details

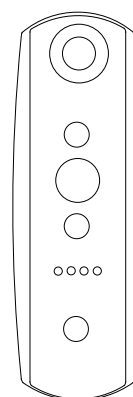


Somfy Remote Controller

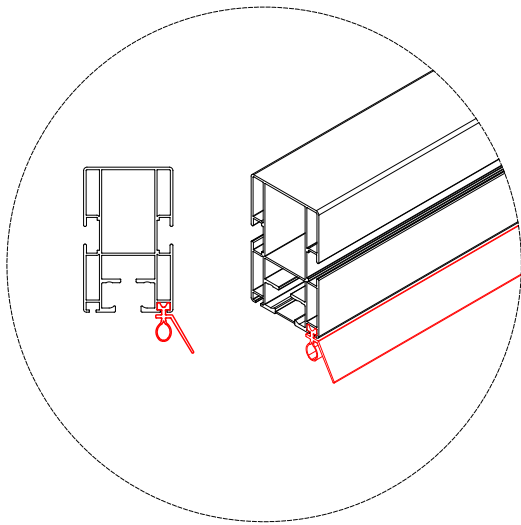


Rafter Side seal. Rafter seal comes into use to prevent water and wind from coming in.

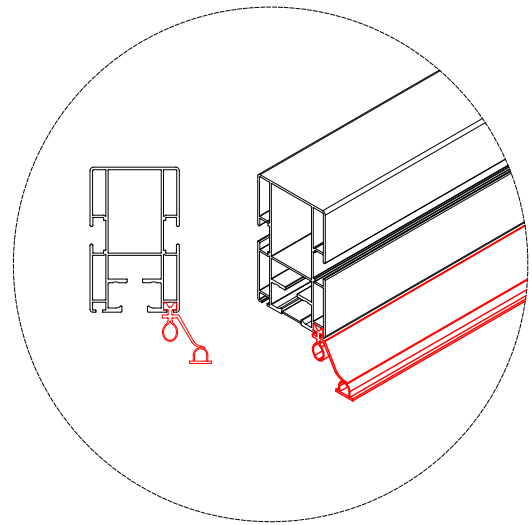

Anti Drop seal and Rafter seal completes each other to ensure flawless isolation.

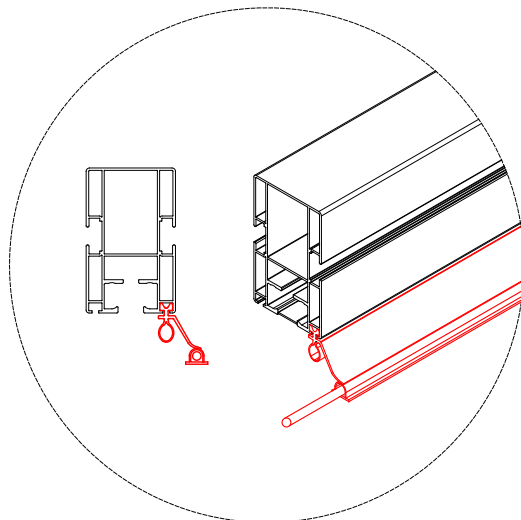

Anti drop seal contains wires inside. Thanks to this multifunction no extra wiring is needed.

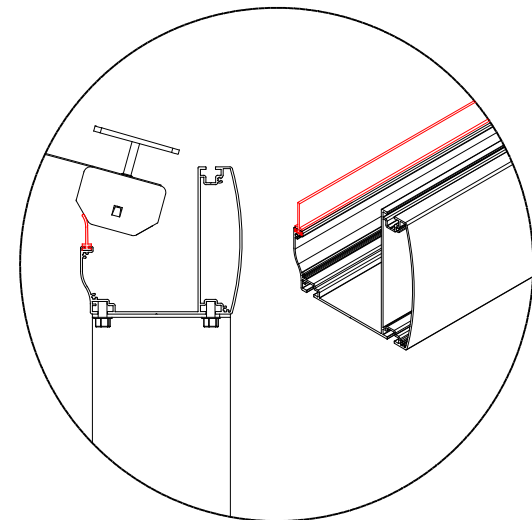

Gutter Seal functions to prevent water from overflowing over the edges of gutter profile as well as to make the system more wind proof.



Osmangazi Mh. 2626 Sk. No:9/2
Esenyurt 34522 İstanbul / Türkiye

risingoutdoor.com |    risingoutdoor | 90 212 444 1 886