




UNIFOLIATE TECTONA


TECHNICAL INFORMATION BOOKLET

V1/301019

SINGLE MODULE SYSTEM MEASUREMENTS

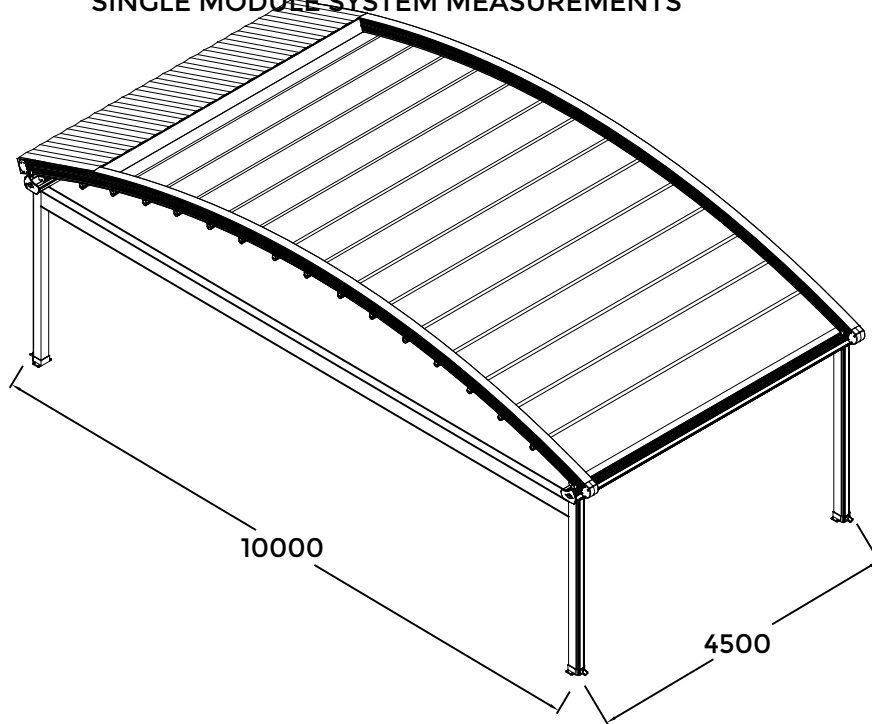


The maximum width between any two rafter is 4,5 mt .

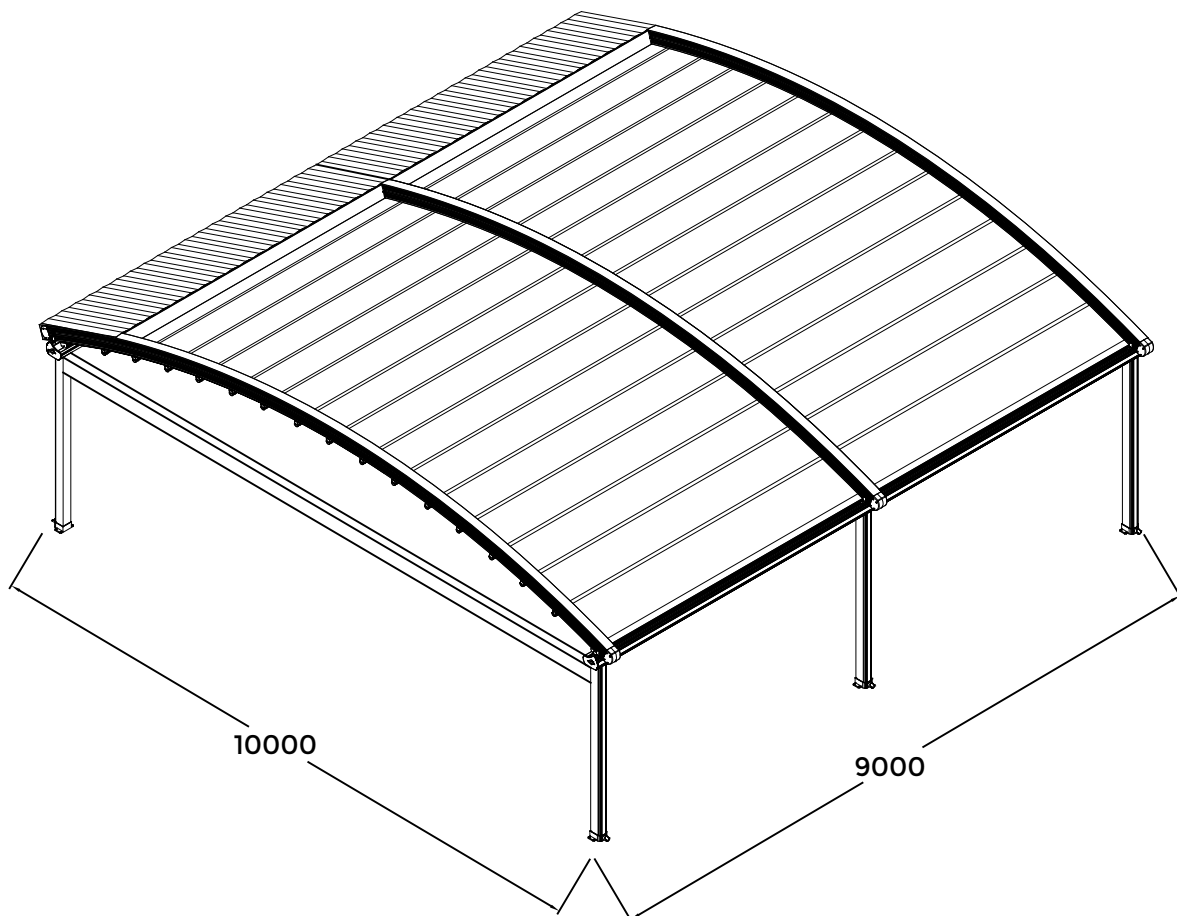

The module with 9Mt width has 3 rafters and the distance between the rafters is 4,5Mt.



Note: As our systems are modular system, we can go beyond the standard width by adding additional modules to the existing modules. The numbers of the front posts will be determined in line with system specifications.

Single Module Systems measurements.

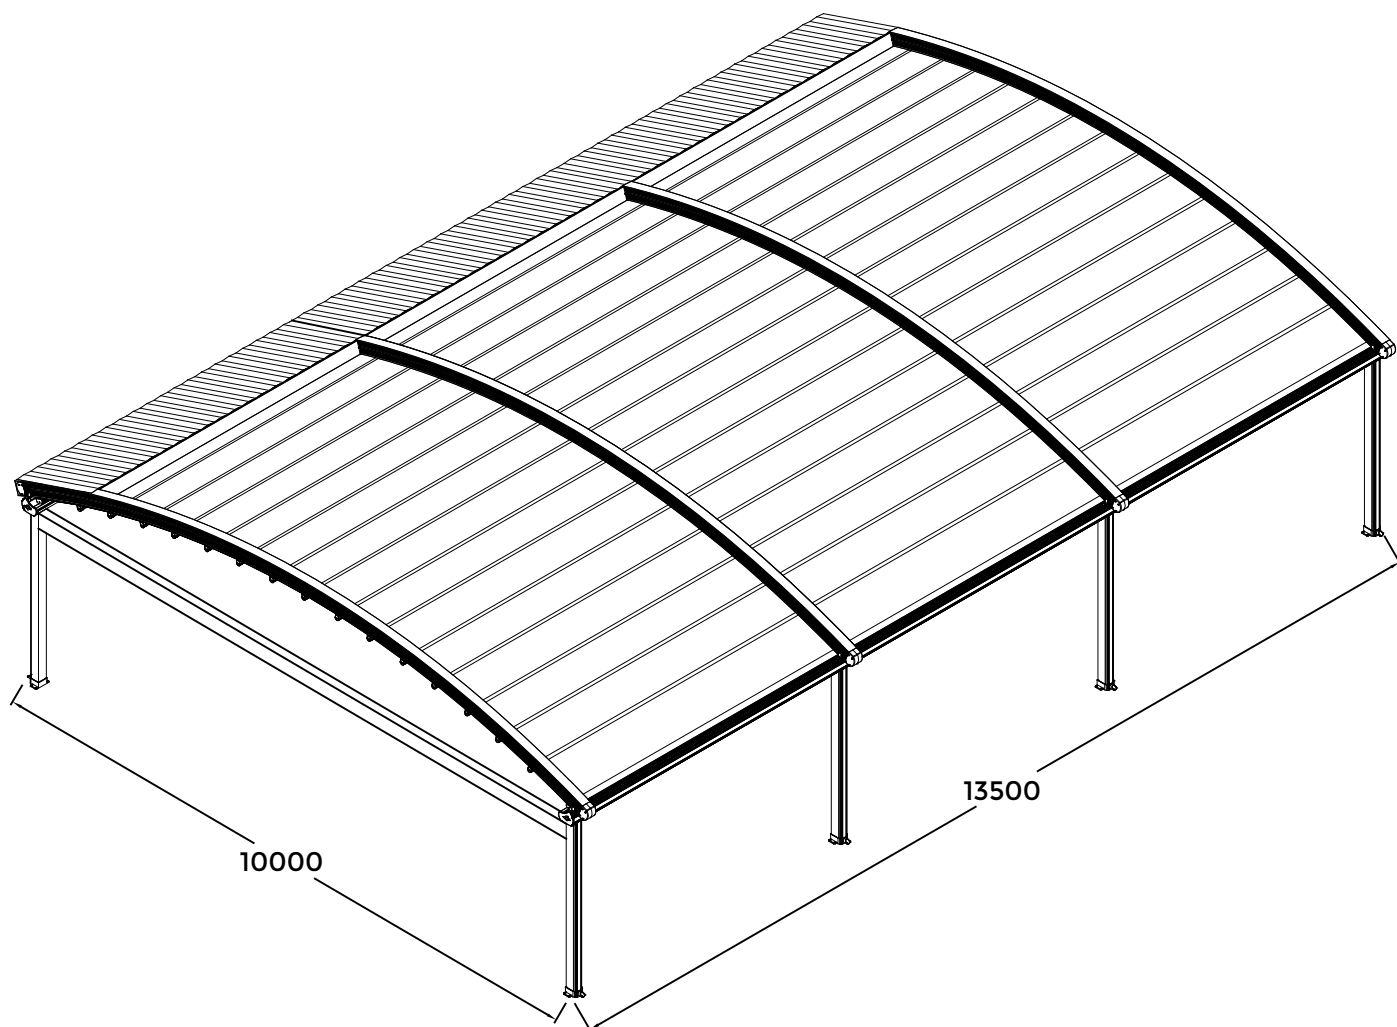


The module with 13,5 Mt width has 4 rafters and the distance between the rafters is 4,5Mt.


Note: As our systems are modular system, we can go beyond the standard width by adding additional modules to the existing modules. The numbers of the front posts will be determined in line with system specifications.

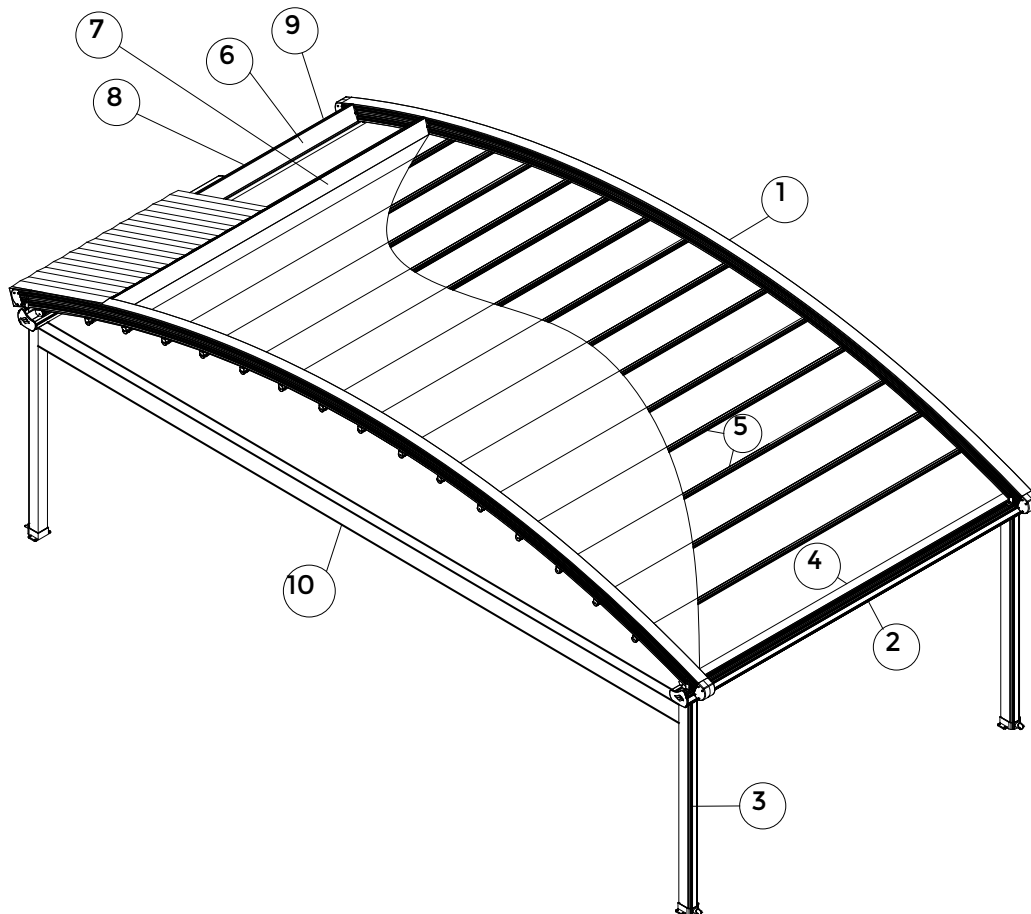


1- Rafter Profile

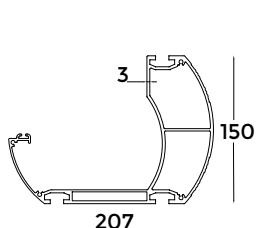


2 - Gutter Profile




3 -Front
Carrier Post




4 - Puller Profile




5 - Fabric
Support Profile




6 - Motor Profile




7 - Roof
Joining
Profile

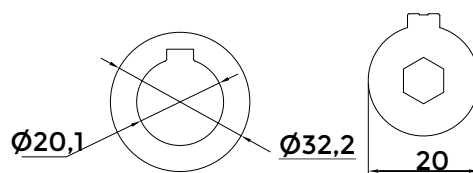

8 -Thick
Shaft
Profile




9 - Thin Shaft Profile


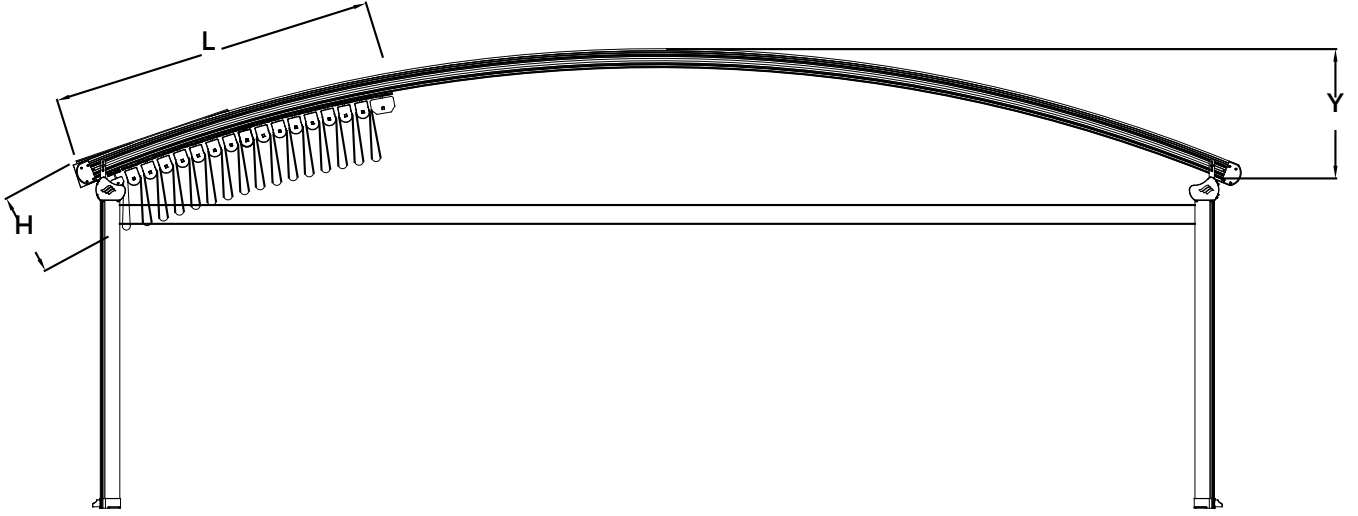


RESİM DOSYASI
OLDUĞU İÇİN
İŞLEM
YAPILAMADI


UNIFOLIATE TECTONA				
DIMENSION	FABRİC HEIGHT	HOOD	FALL	FAB.SUP.PROFIL ES
AÇILIM	KUMAŞ YUKSEKLİĞİ	TRAPEZ	EGİM YUK	PROFIL AD
CM	(H) CM	(L) CM	(Y) CM	PC
300	44	66	53	8
350	44	73	56,5	9
400	44	80	60	10
450	44	87	63,5	11
500	44	94	67	12
550	44	101	70,5	13
600	44	108	74	14
650	44	115	77,5	15
700	44	122	81	16
750	44	129	84,5	17
800	44	136	88	18
850	44	143	91,5	19
900	44	150	95	20
950	44	157	98,5	21
1000	44	164	102	22

The standard degree for inclination is 8 degree.
The distance between fabric support profiles is 50cm

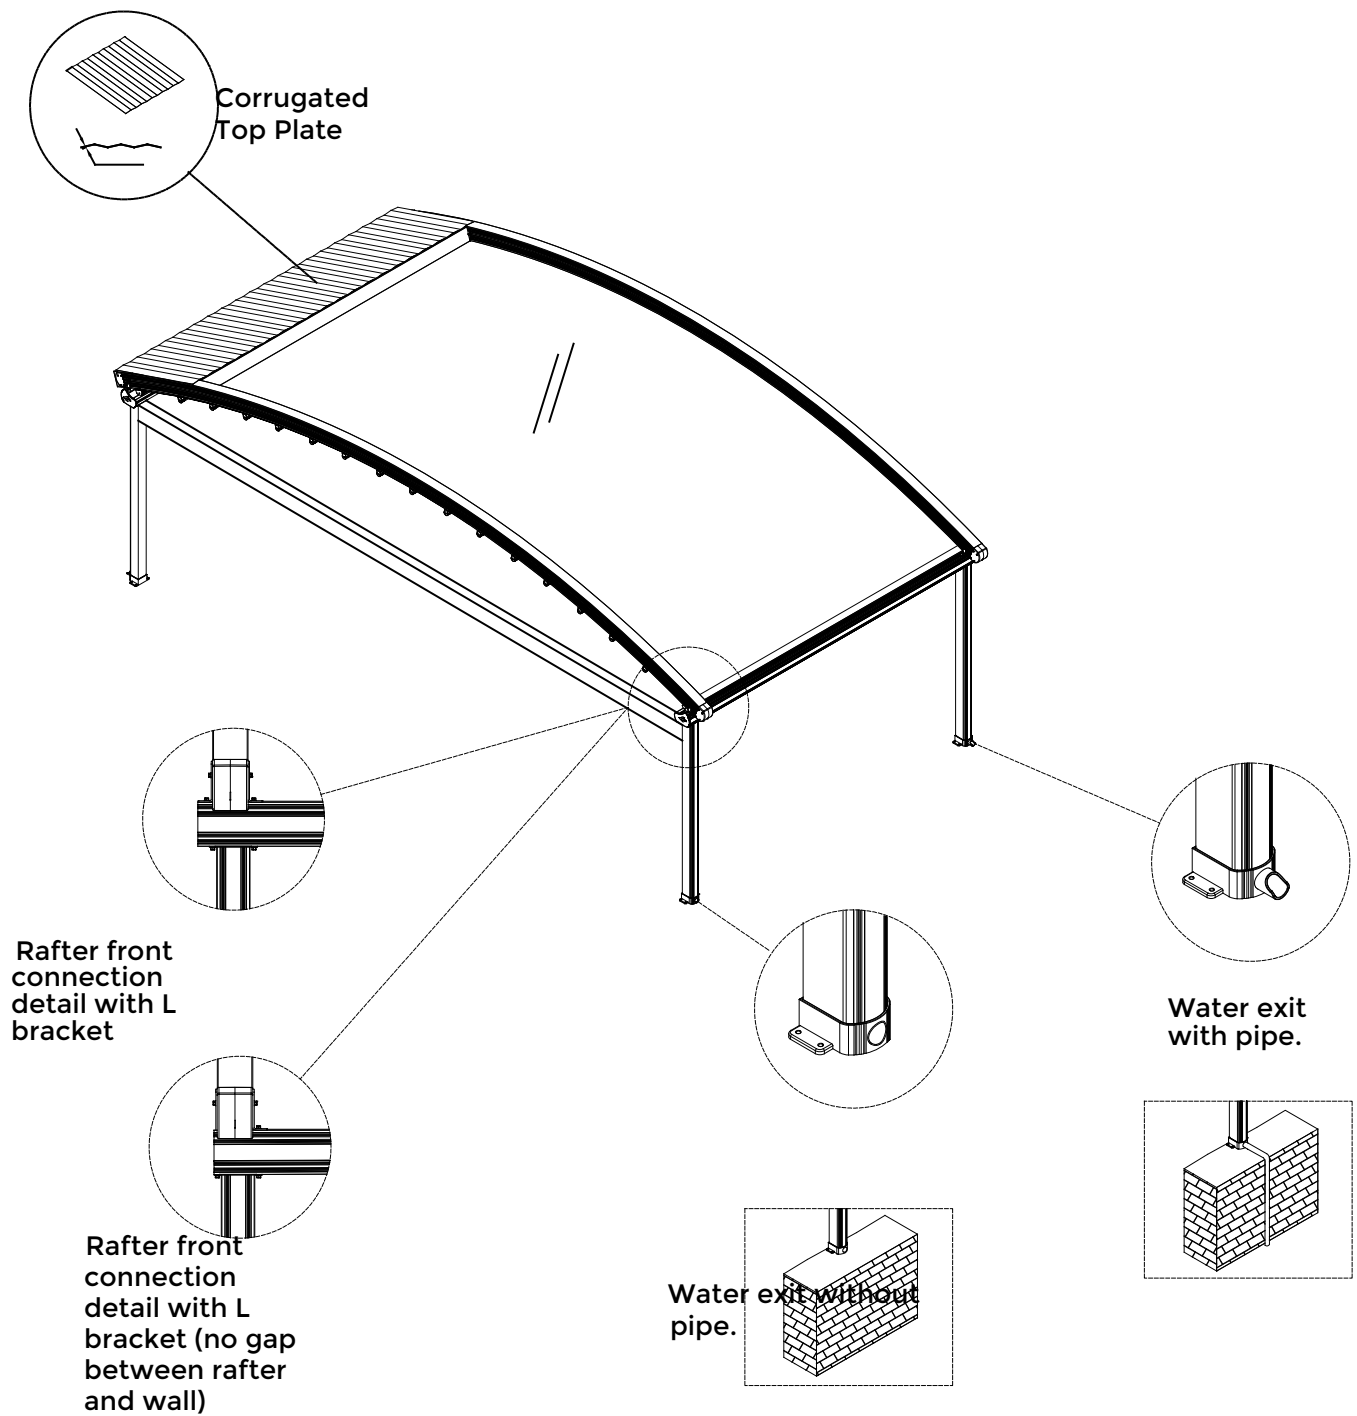


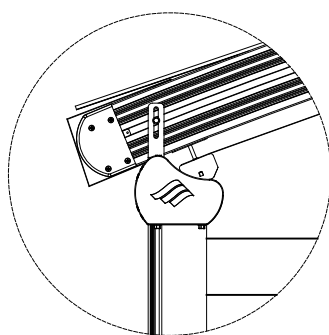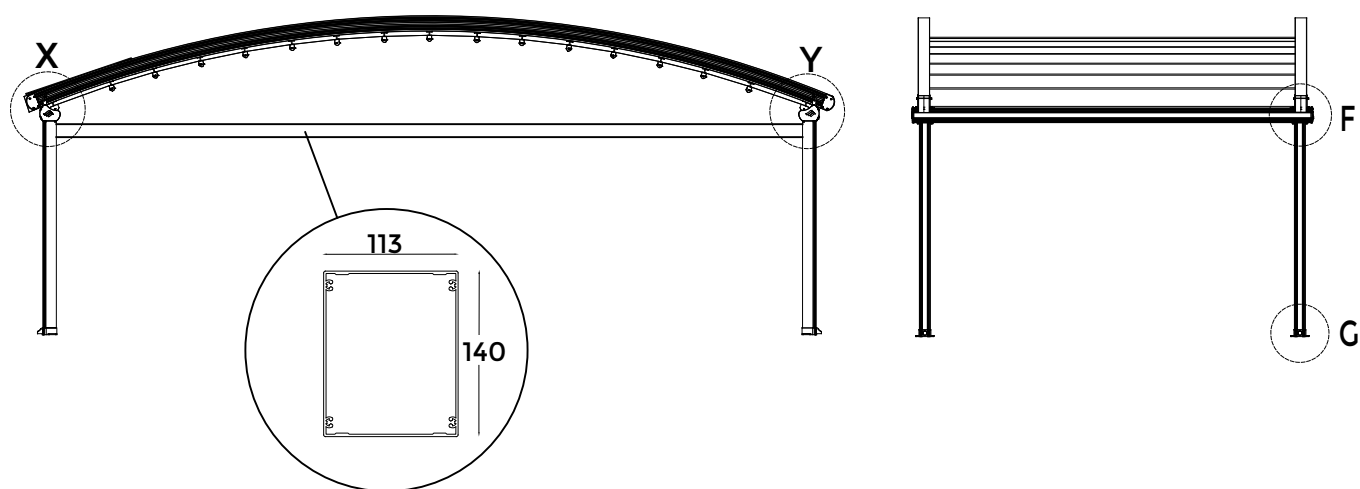


X
Detailed view

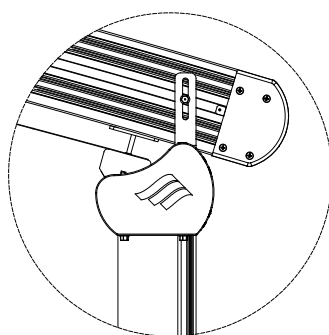


Y
Detailed view

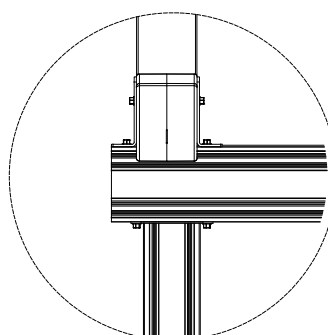


F
Detailed view

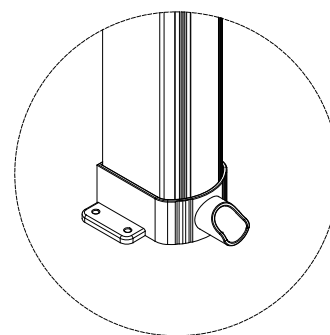


G
Detailed view

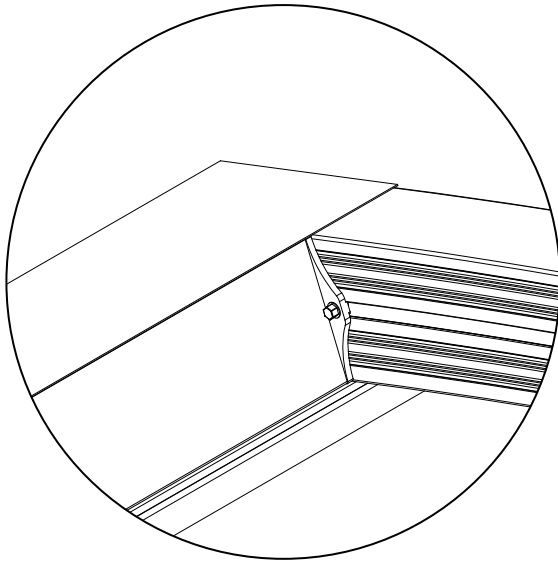


**Back Rafter
Connection
details**

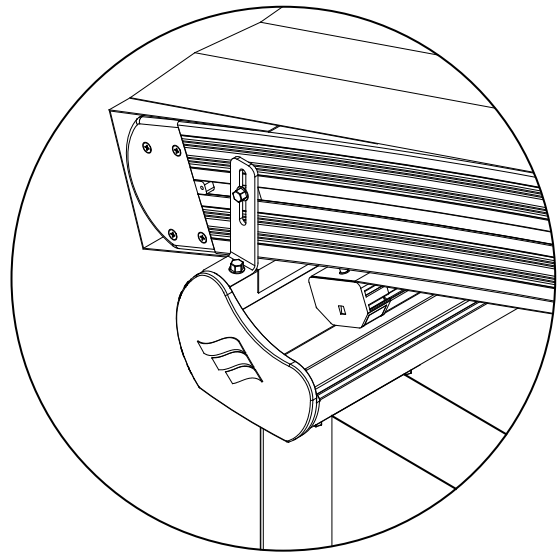


**Back Rafter
Detail**

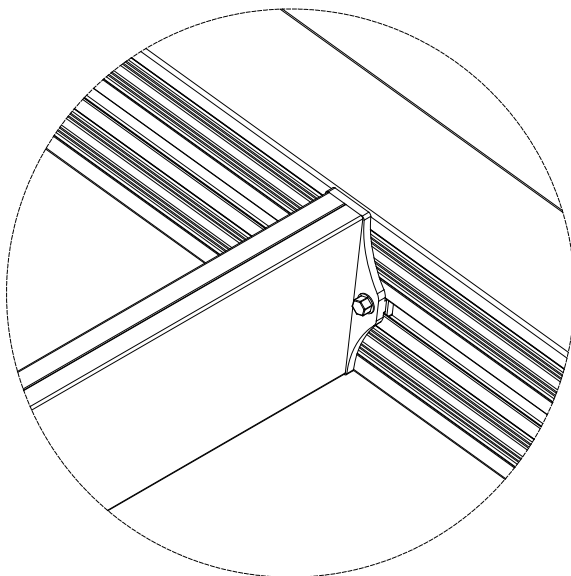

**Roof Joining Profile
Connection detail**

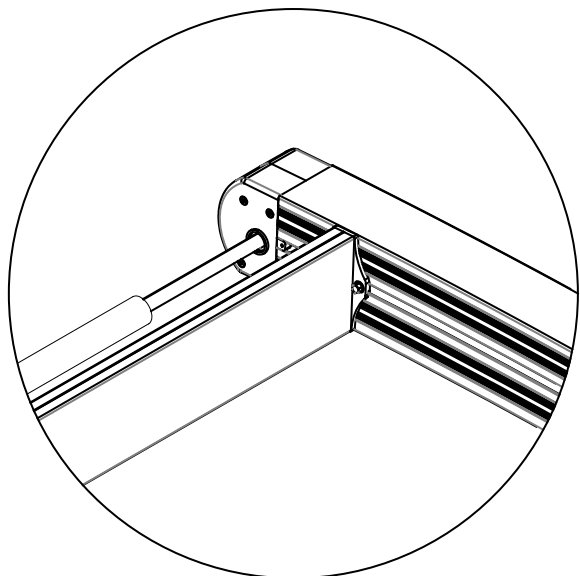


**The detail of
shaft profile
while inserted
into gear box**

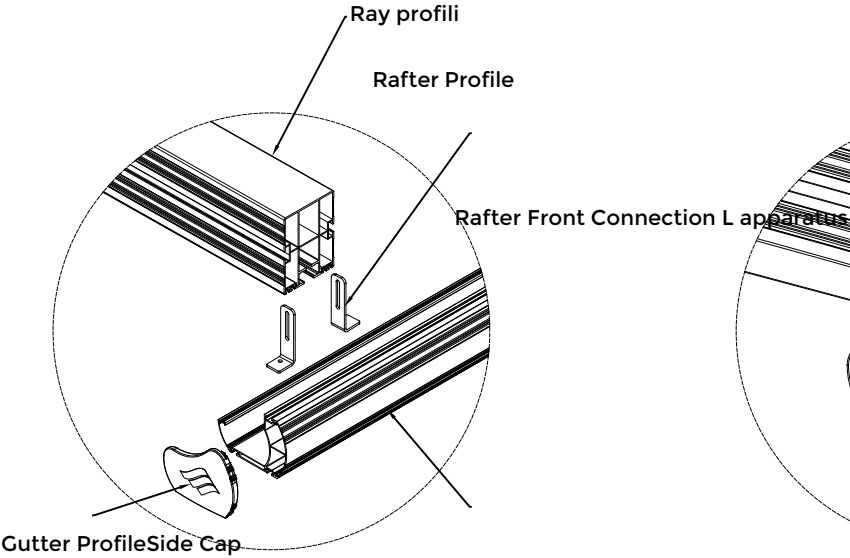


**Rafter & Gutter
connection
detail- 1**


Gutter Profile

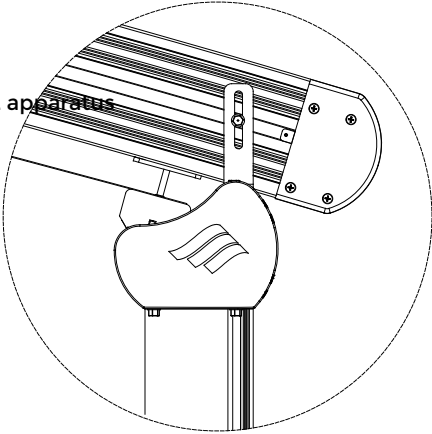


**Rafter & Gutter
connection
detail -2**

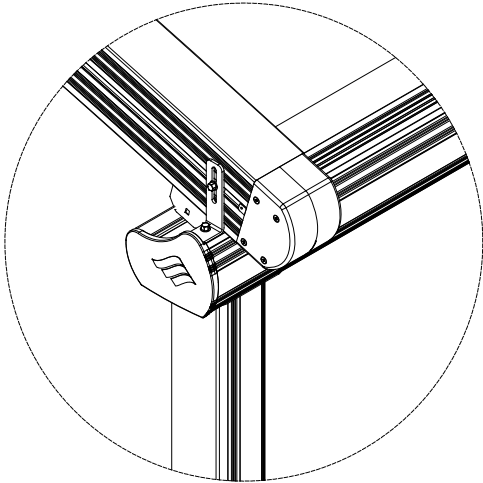


**Rafter & Gutter
connection
detail- 3**

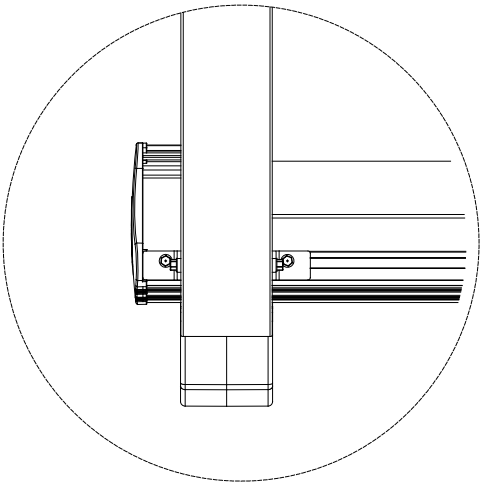


**Rafter & Gutter
connection
detail- 4**

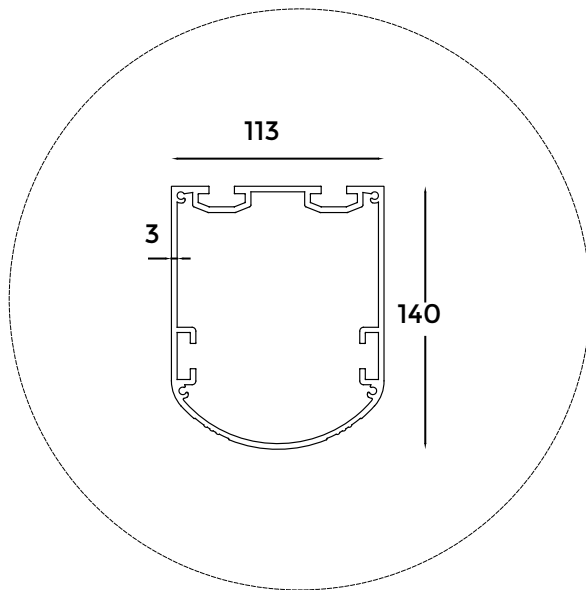


**Front Post
detail**

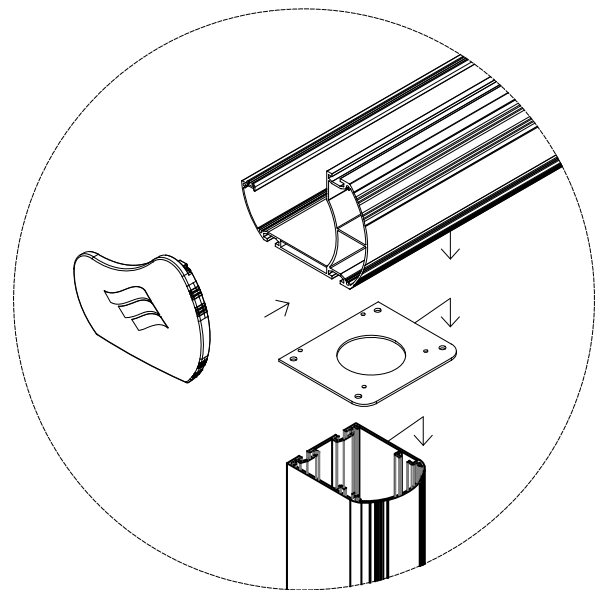


**Front Post &
Gutter Profile
connection detail**

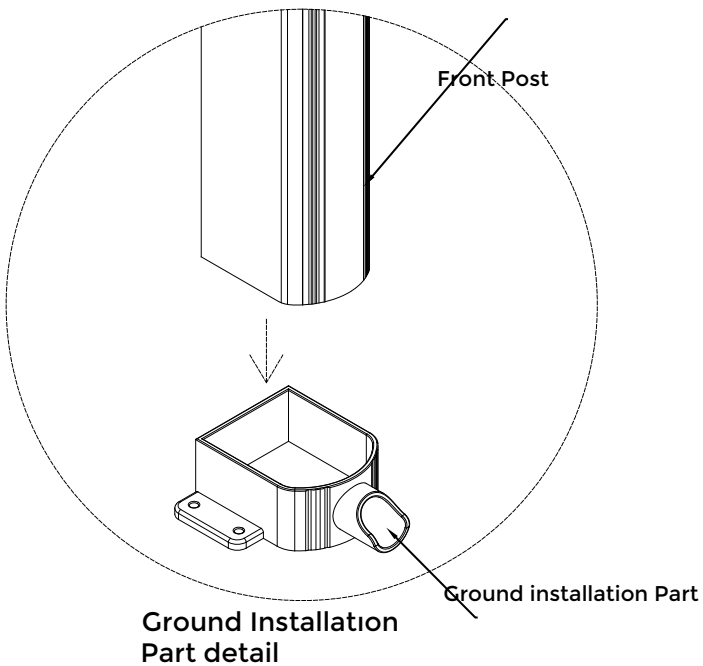


**Ground Installation
Part detail**

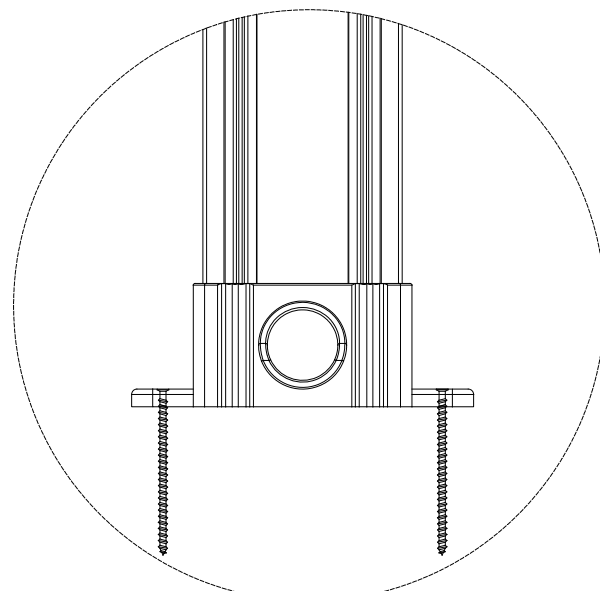


**Front Post &
Ground Installation
Part connection
detail**

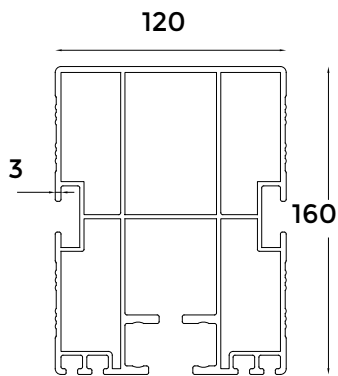


Rafter Profile detail

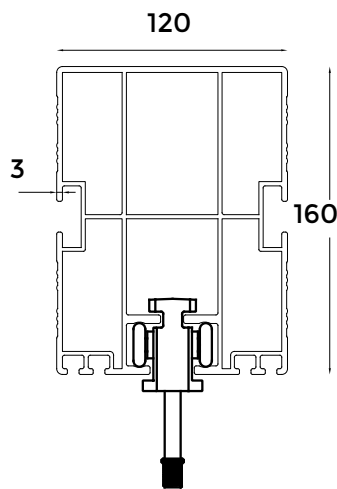

Conveyor car
operating in the
Rafter Profile

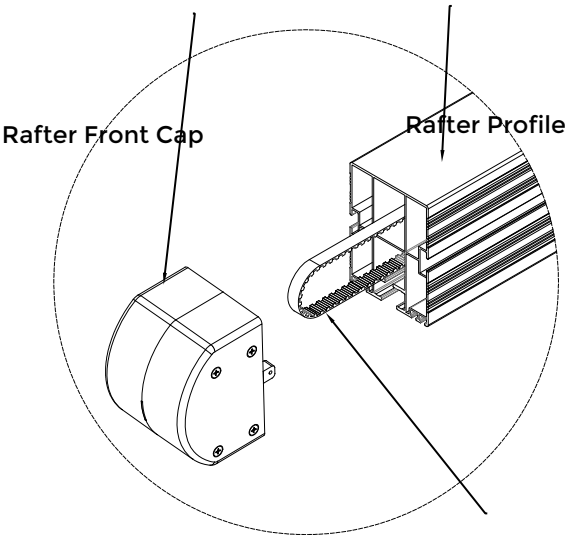


Toothed Belt
operation
detail

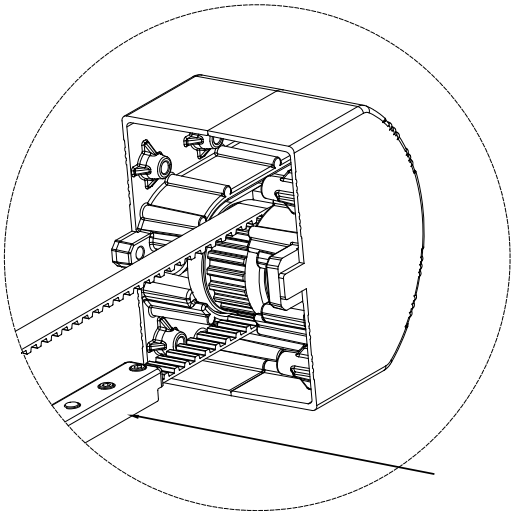


Rafter front
cap interior
mechanism
details

Toothed Belt


Toothed Belt
Joint
connector

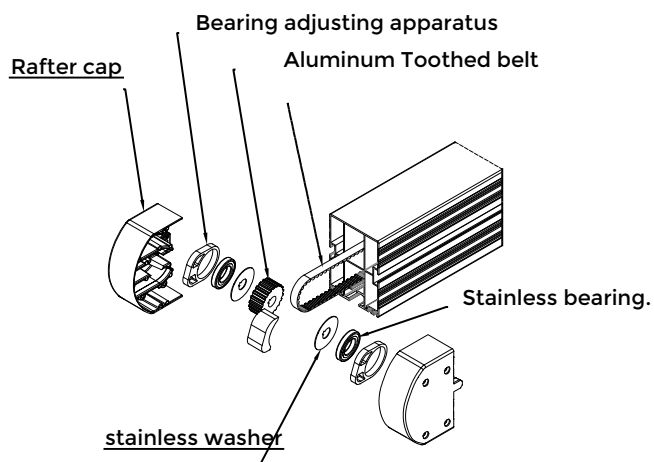


**Rafter back
Connector
details**

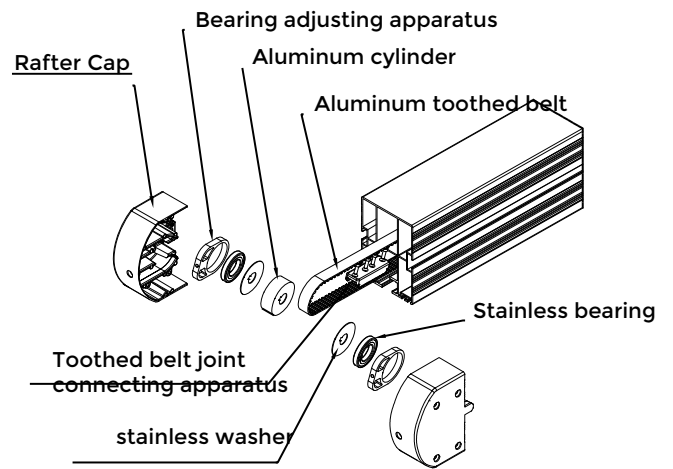


Rafter Front Connector details

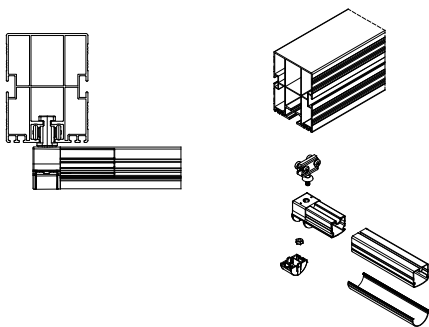


**Fabric Support
Profile plastic
connector for
sides.**

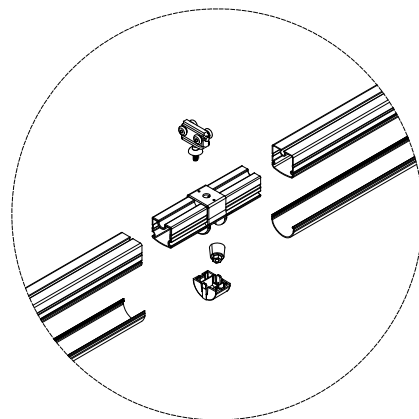


**Fabric Support
Profile plastic
connector for
middle part.**

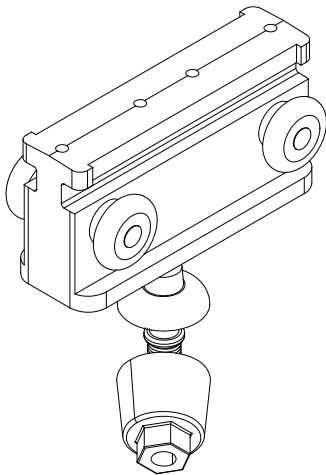


Main Puller Car

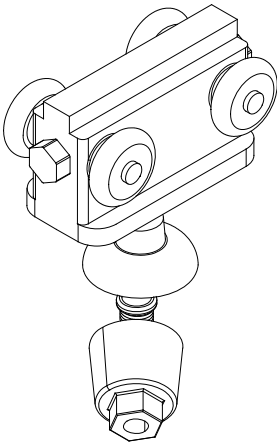


Fabric Puller car

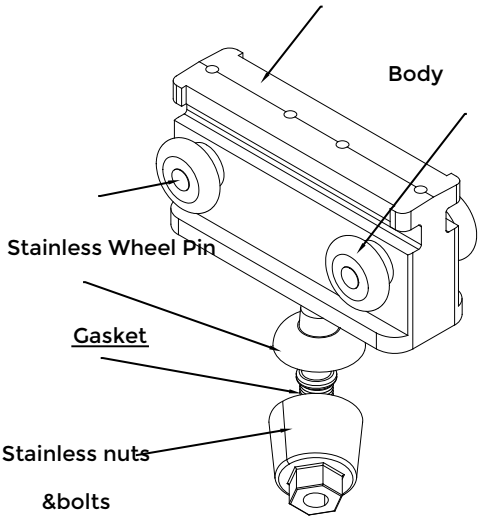


Special designed
Main Puller Car
with four wheels

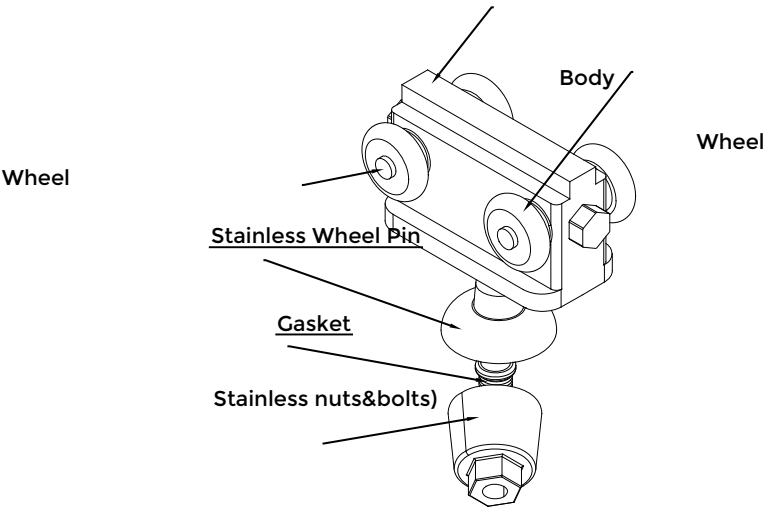


Special designed
Fabric Puller Car
with four wheels

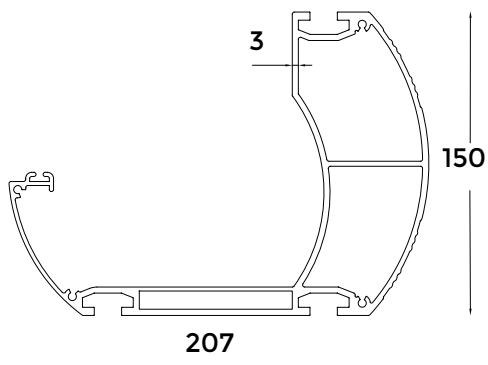


Special designed Gutter profile with increased water disposal capacity

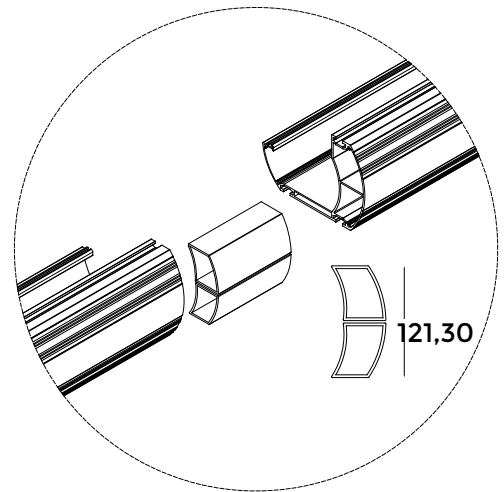


Gutter profile connecting profile detail.

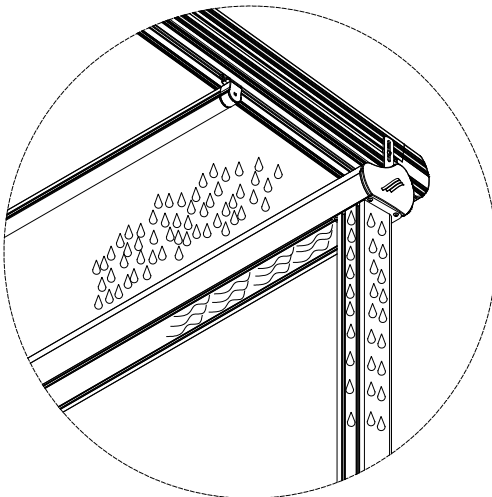


The detail of water draining through several components

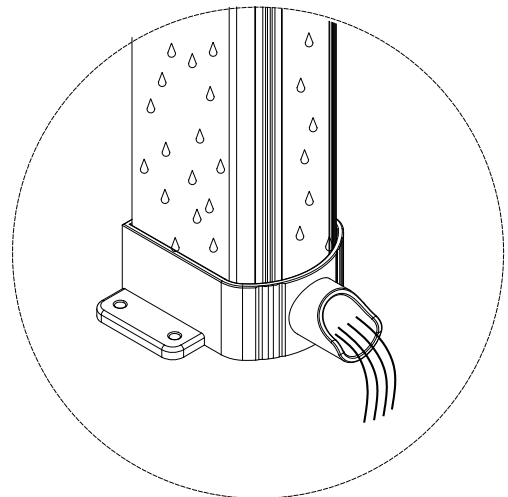


Front Post water disposal details

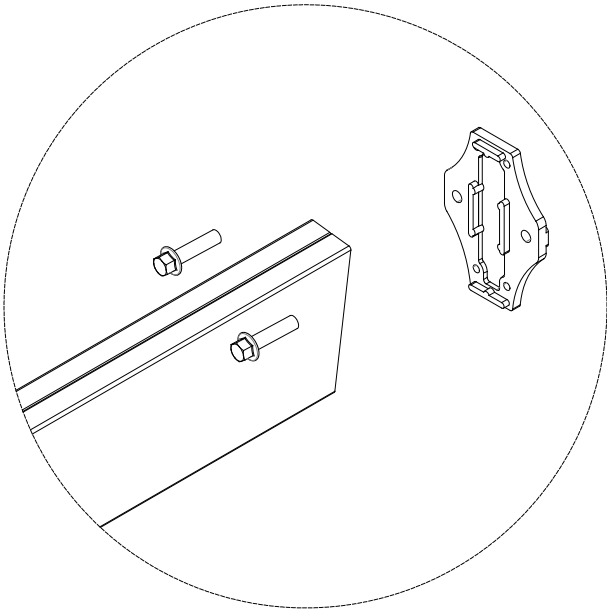


Motor and
Roof Joining
Profile
connection
details

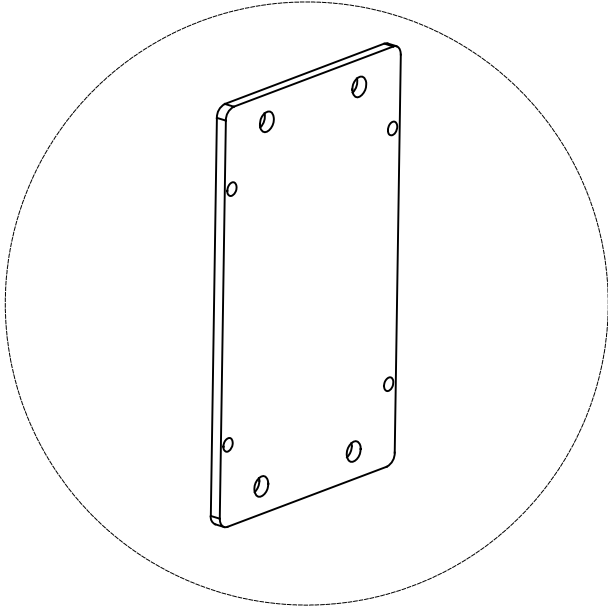



4ékĩĩ ìékηύðì òçòÁúé, ¯,ijkúé

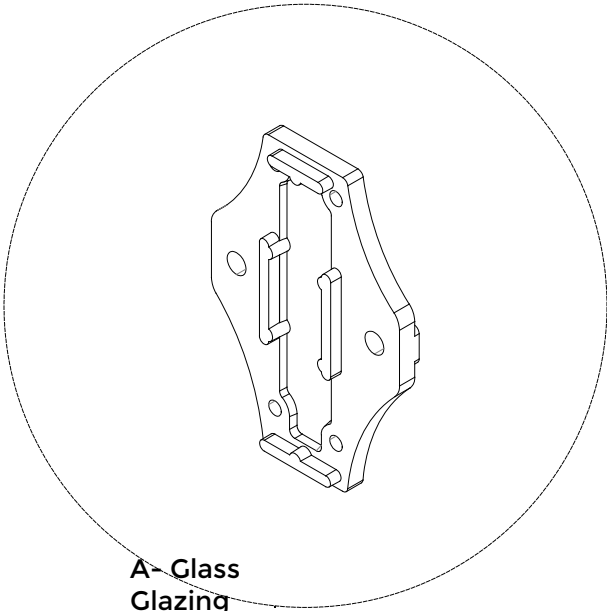


A- Glass
Glazing
profile
connector for
back part.

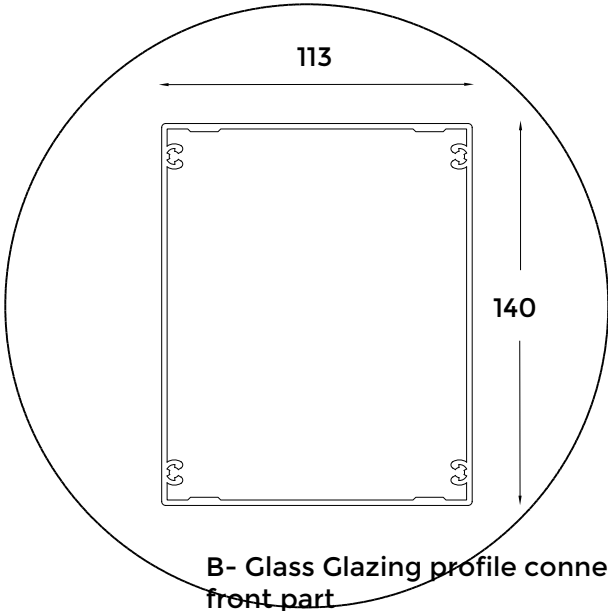


B- Glass Glazing profile connector for
front part

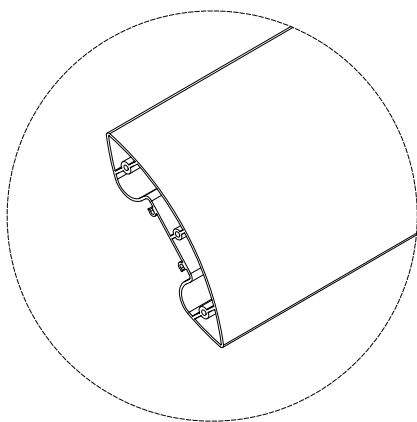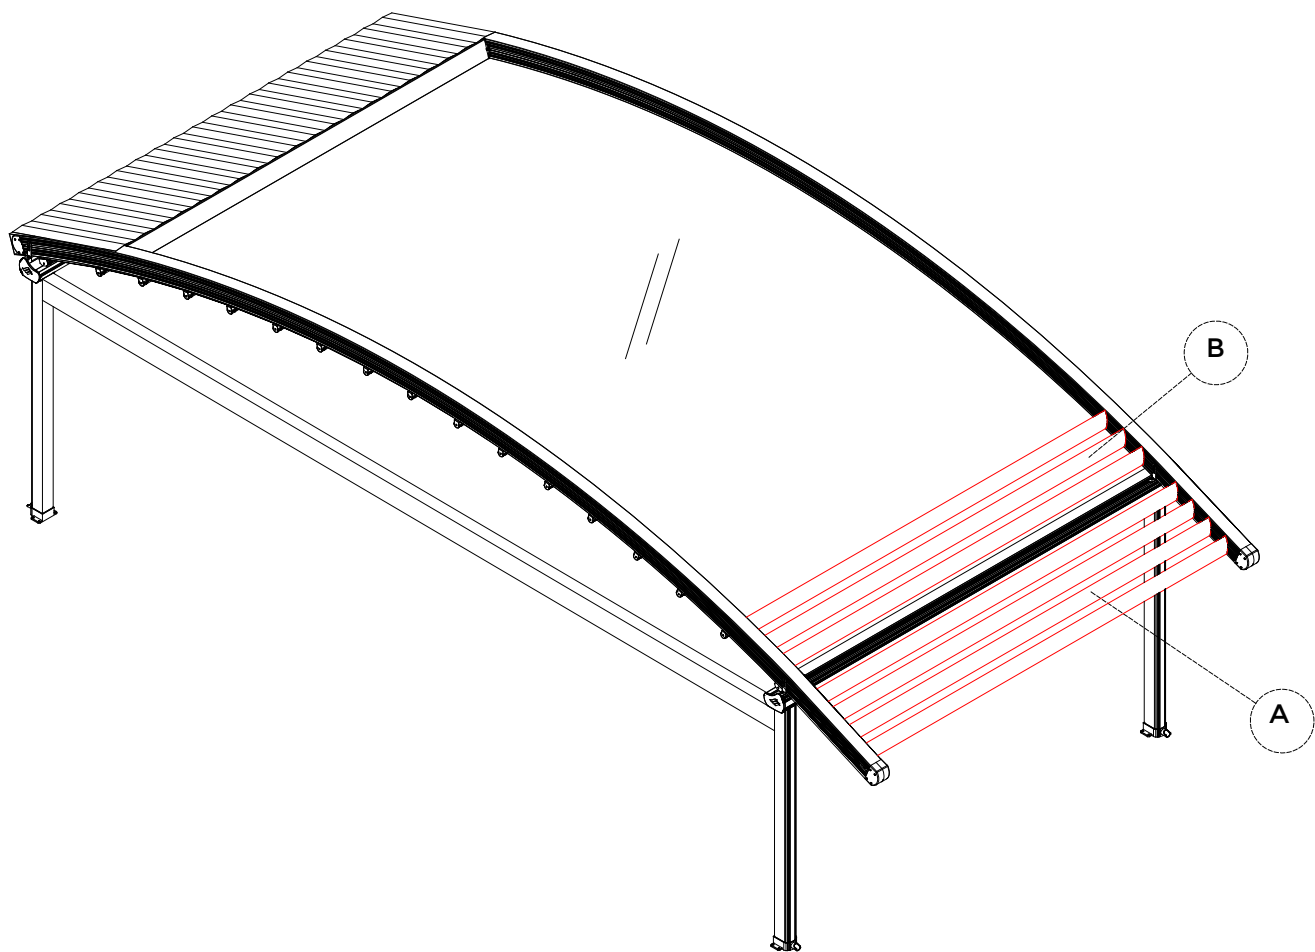


**A-Sun Blocker detailed view-
without channel for lighting system**

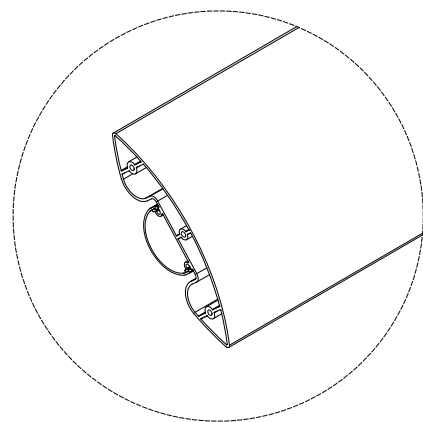


**B-Sun Blocker detailed view-
with channel for lighting system**

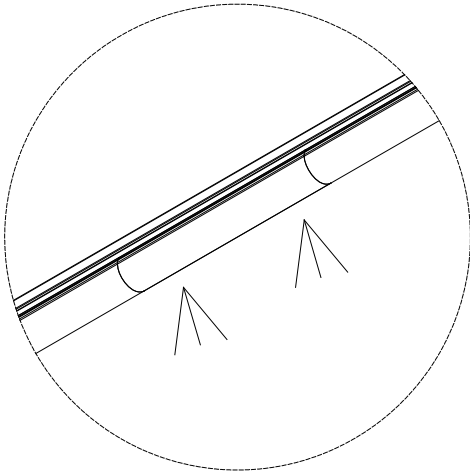


Fabric support profile with high tech linear lighting system embedded in the profile.

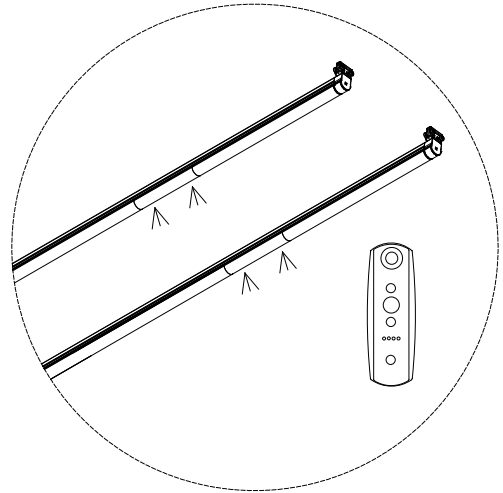


when required the lighting system can be equipped with dimmer to vary the brightness of the lighting system.

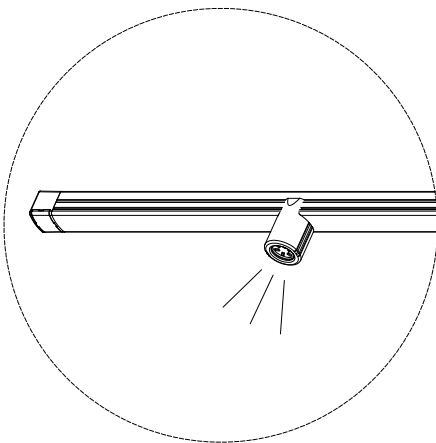


Specially designed Spot Lighting System integrated into fabric support profile.

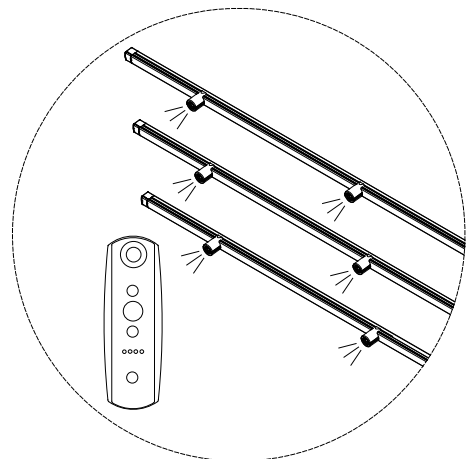


When required lighting system can be equipped with a dimmer option to vary the brightness of the lighting.

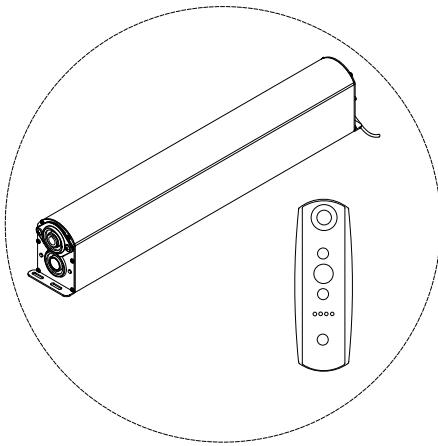


Specially designed motor box equipped with special apparatus both inside and outside the box ensures your motor to reach to its maximum capacity as well as to increase its durability.

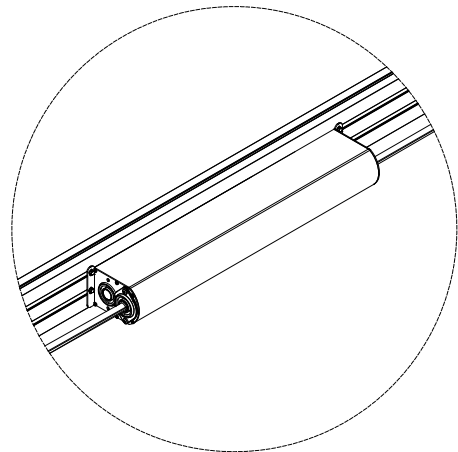


The connection details of motor box to the back motor profile.

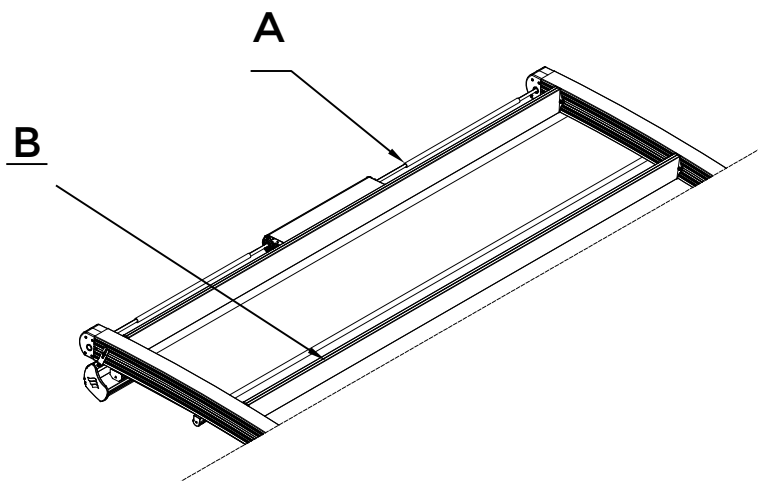


A- Motor box shaft profile connections.
B- Roof joining profile connection details




Somfy Remote Controller

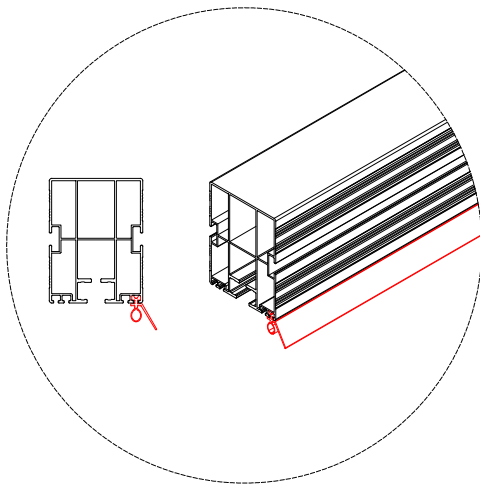


Rafter Side seal. Rafter seal comes into use to prevent water and wind from coming in.

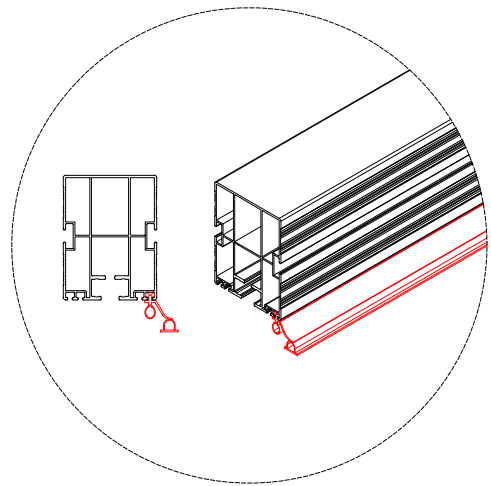

Anti Drop seal and Rafter seal completes each other to ensure flawless isolation.

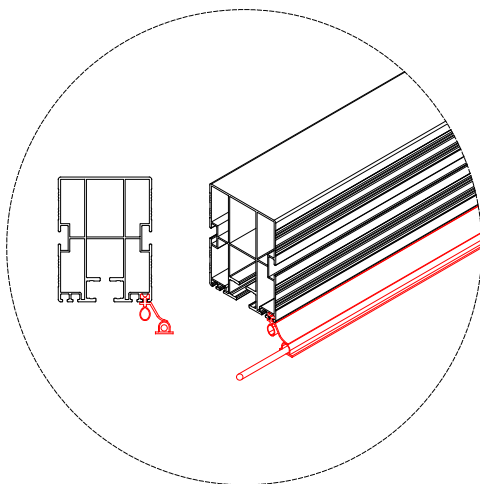

Anti drop seal contains wires inside. Thanks to this multifunction no extra wiring is needed.

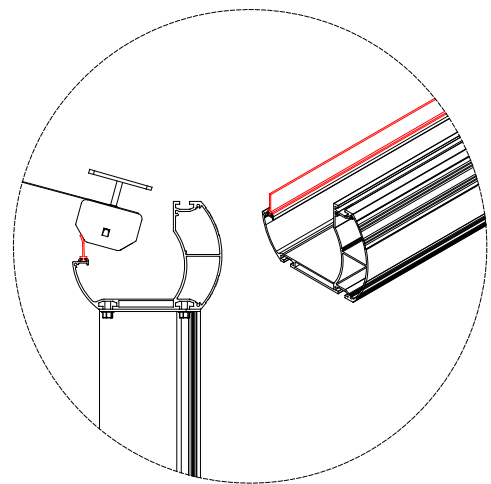

Gutter Seal functions to prevent water from overflowing over the edges of gutter profile as well as to make the system more wind proof.



Osmangazi Mh. 2626 Sk. No:9/2
Esenyurt 34522 İstanbul / Türkiye

risingoutdoor.com |    risingoutdoor | 90 212 444 1 886