




**Rising**


**BIO RISE**

**TECHNICAL  
DOCUMENT**

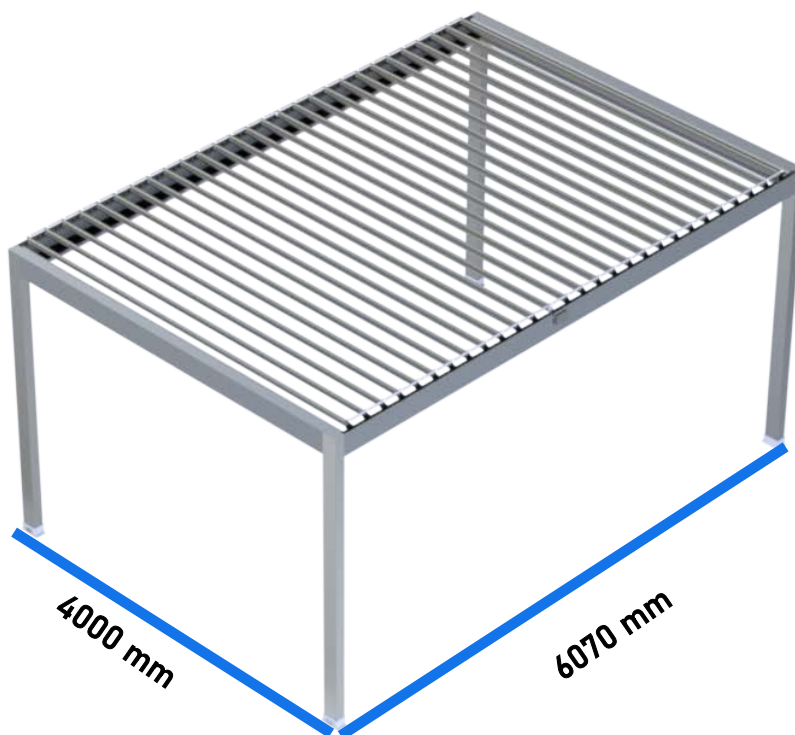


The maximum facade dimension is 4000 mm  
The maximum projection dimension is 6070 mm

## Double module system dimensions

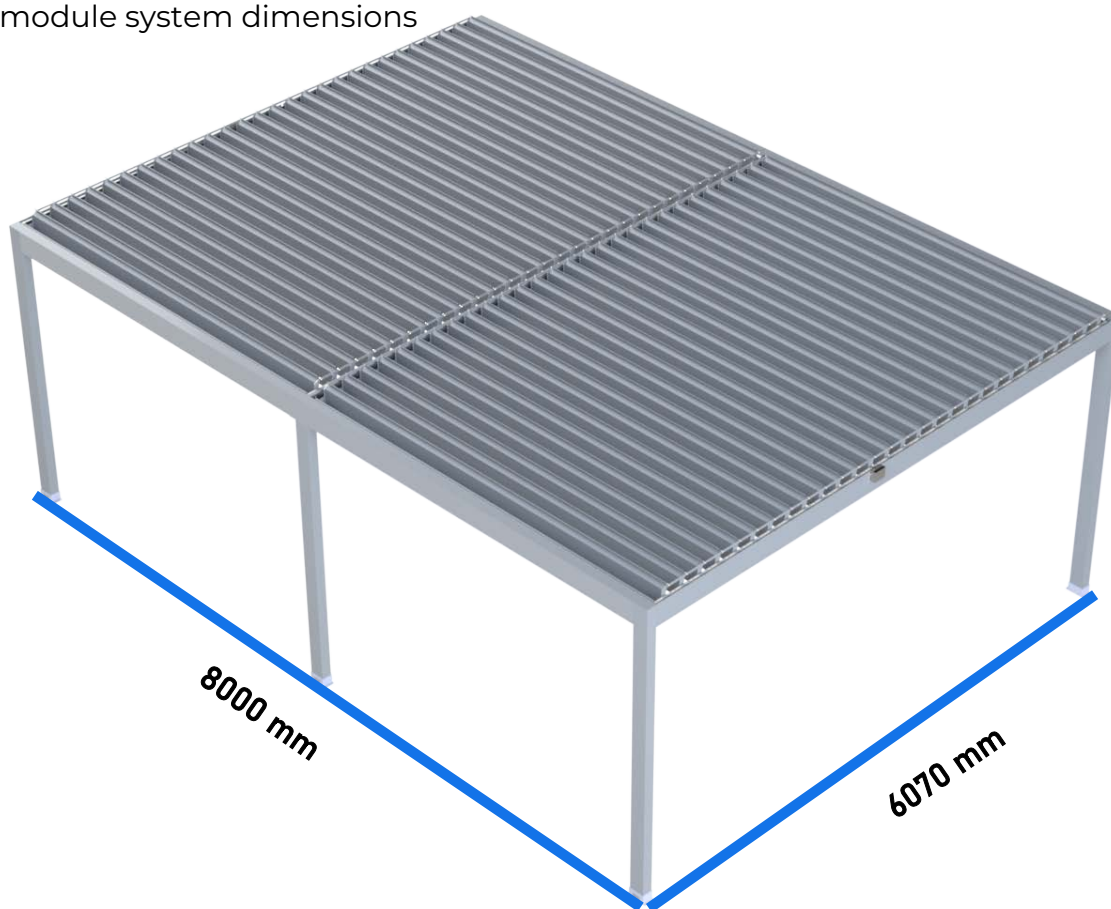


Note: Due to the modular nature of our systems, they can be manufactured in the desired dimensions by adding modules side by side if a larger size is required. The number of front posts is calculated according to what our company deems appropriate for the project.


## Profile section details

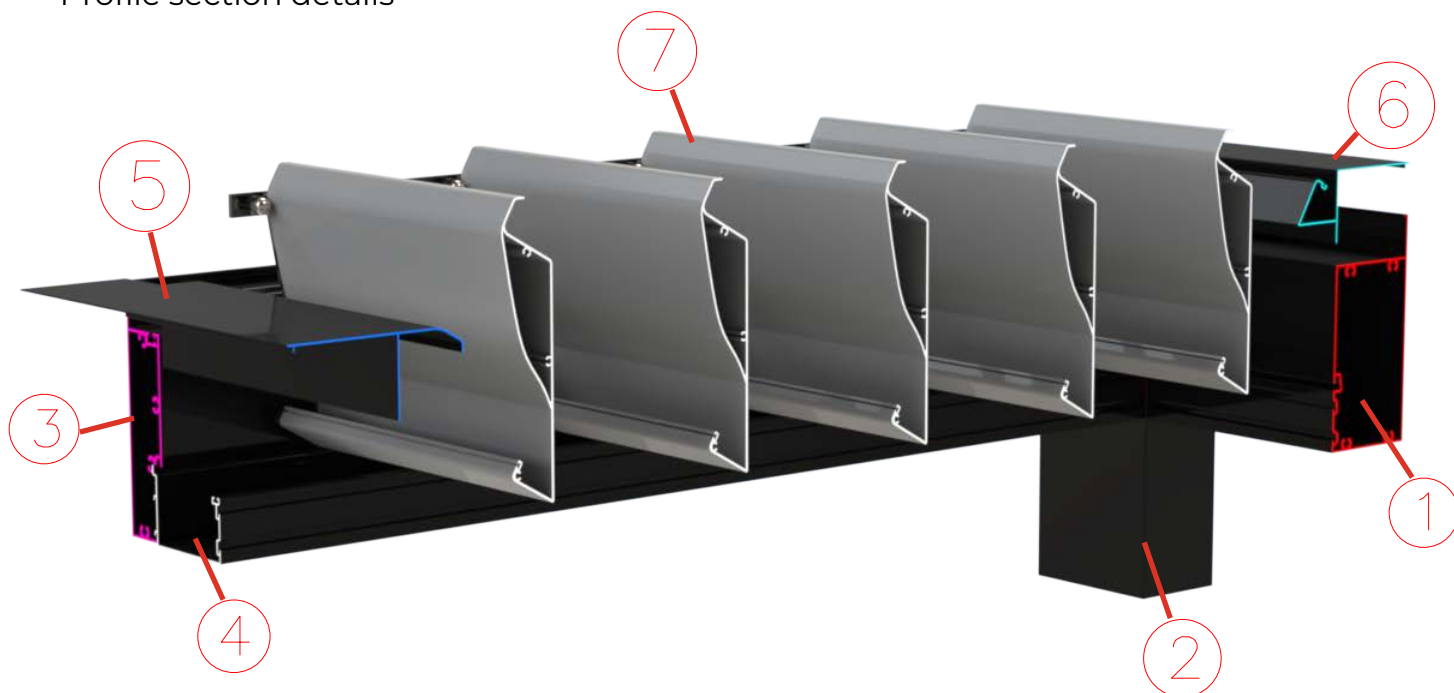


① FRONT/BACK PROFILE

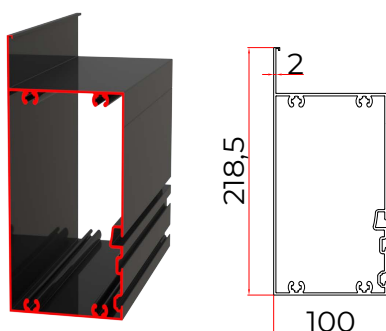


② POST PROFILE

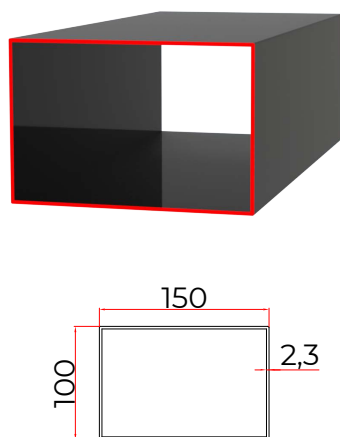


③ SIDE PROFILE

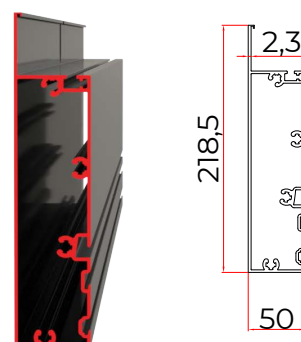


④ GUTTER PROFILE

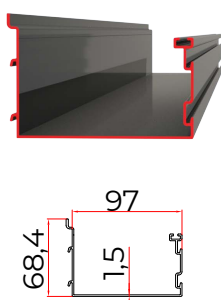


⑤ REAR CLOSING PROFILE

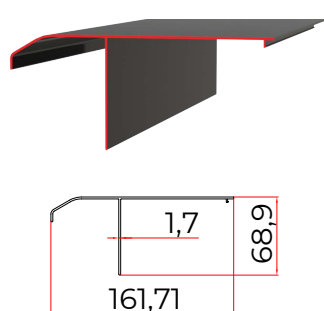


⑥ FRONT CLOSING PROFILE

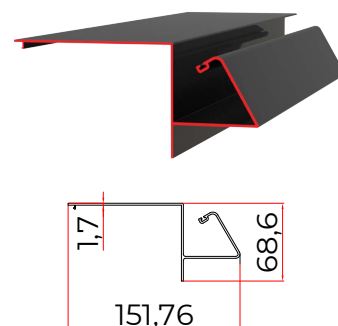


⑦ LOUVRE PROFILE

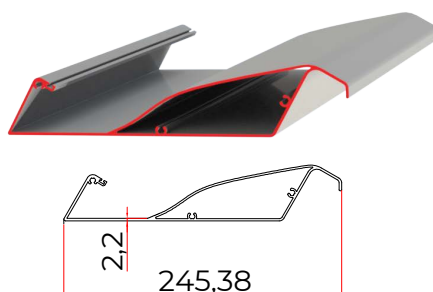

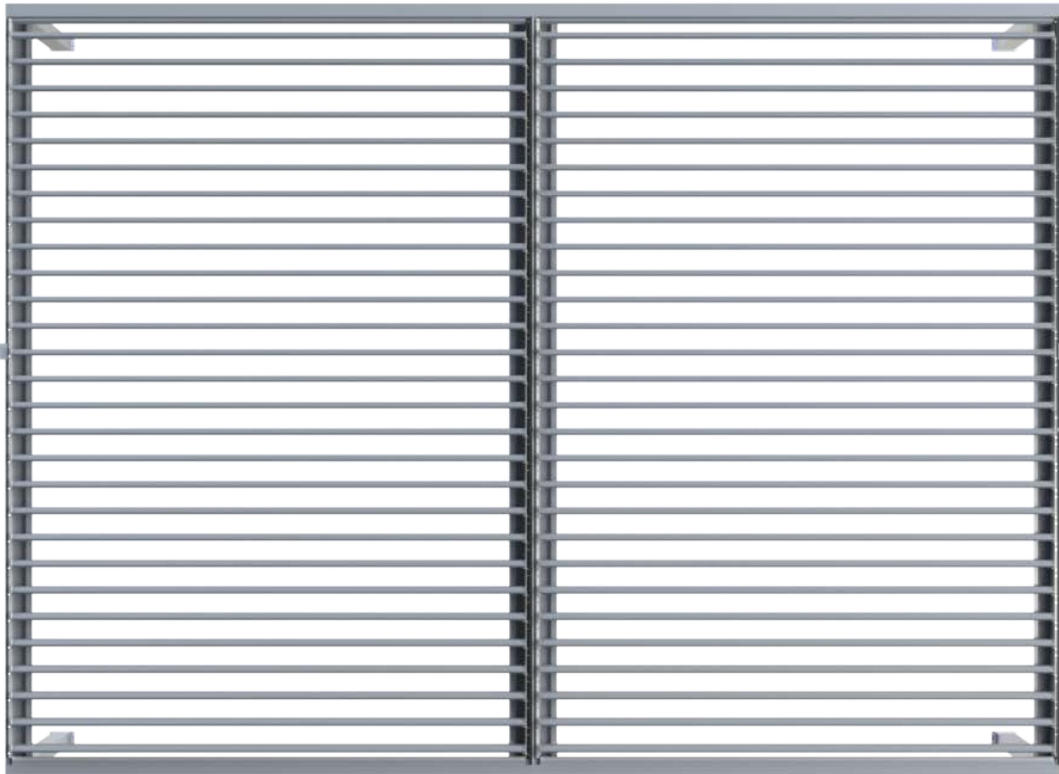

Note: Due to the modular nature of our systems, they can be manufactured in the desired dimensions by adding modules side by side if a larger size is required. The number of front posts is calculated according to what our company deems appropriate for the project

Side section panel distances and quantities

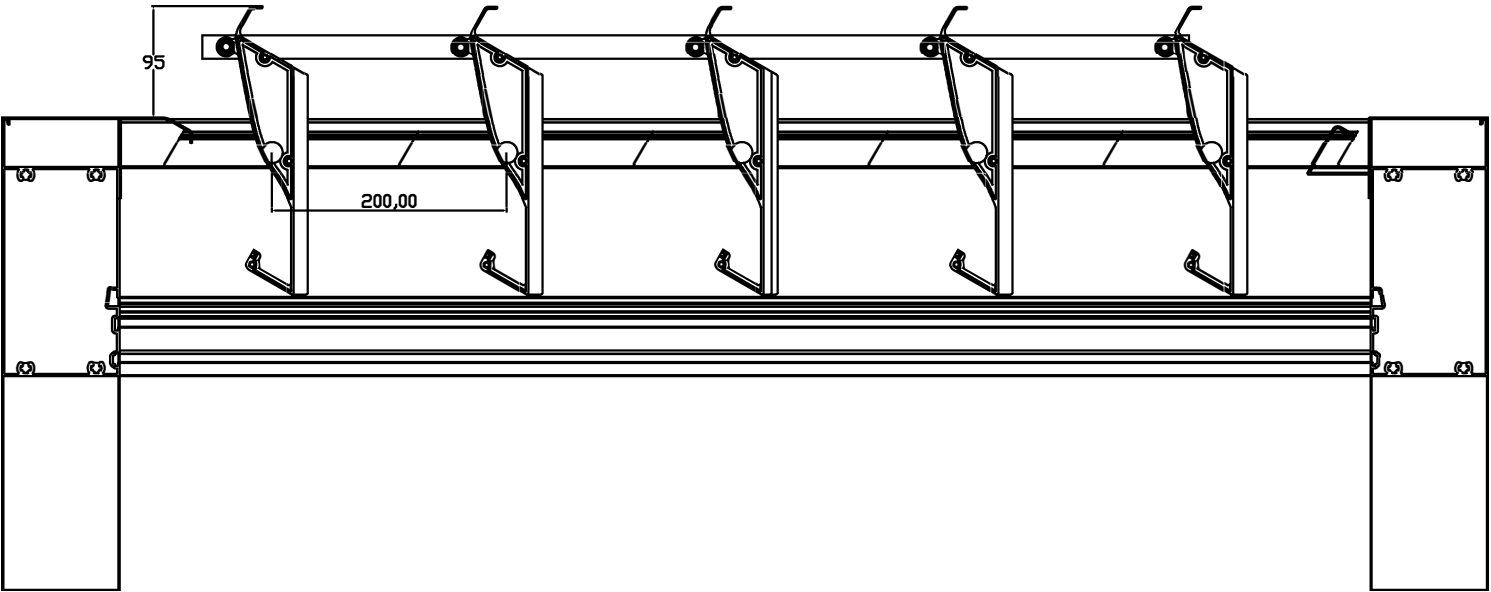


| NUMBER OF LOUVRE | PROJECTION |
|------------------|------------|
| 5                | 127        |
| 6                | 147        |
| 7                | 167        |
| 8                | 187        |
| 9                | 207        |
| 10               | 227        |
| 11               | 247        |
| 12               | 267        |
| 13               | 287        |
| 14               | 307        |
| 15               | 327        |
| 16               | 347        |
| 17               | 367        |
| 18               | 387        |
| 19               | 407        |
| 20               | 427        |
| 21               | 447        |
| 22               | 467        |
| 23               | 487        |
| 24               | 507        |
| 25               | 527        |
| 26               | 547        |
| 27               | 567        |
| 28               | 587        |
| 29               | 607        |



Product projections are determined according to the number of panels

## Louvre Angles

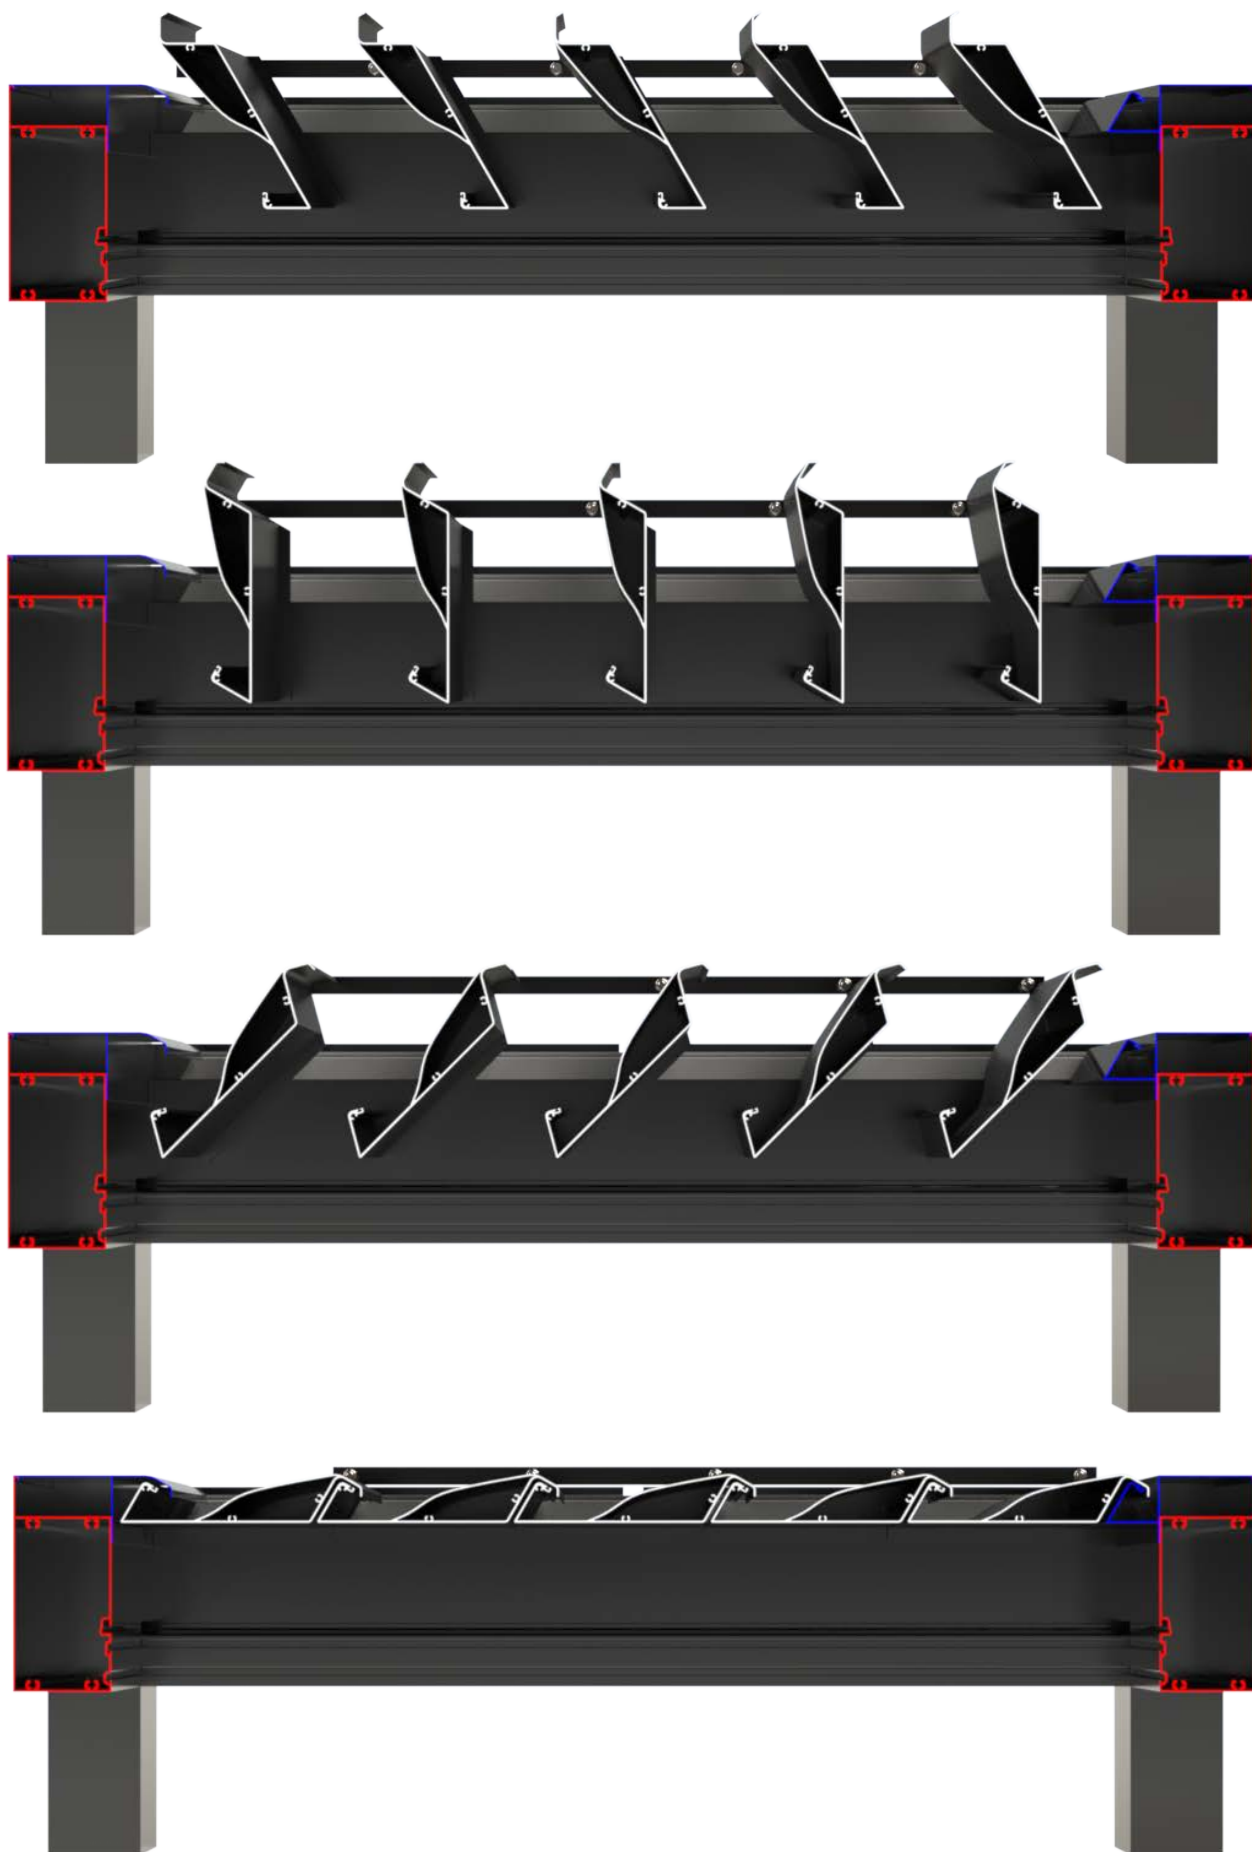

Louvre angles can move from 0 to 120 degrees. In motorized products, this angle is limited to 90 degrees


## Water flow and sealing details



The gutters in the side frames allow for the drainage of water coming to the product.



## Details

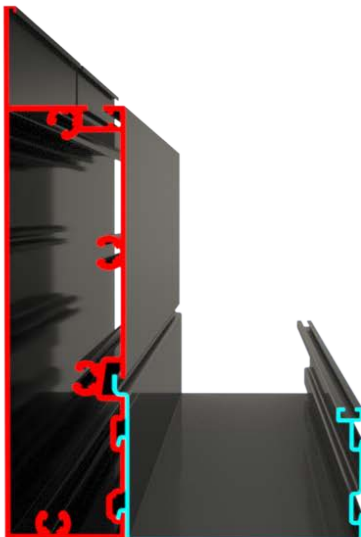

Thanks to the integrated gutter design in the side profiles, silicone is not applied between the profile and gutters during the assembly process.

The Bio Rise product has 3 different types of lighting



The strip LED system surrounding the product

Magnetic LED and integrated powerful sound system





The sound-sensitive LED system specially placed under the panels

Bio Rise can be manufactured in manual and motorized versions


Manual




Thanks to the special reducer system in Bio Rise, the product can be used without the need for electricity

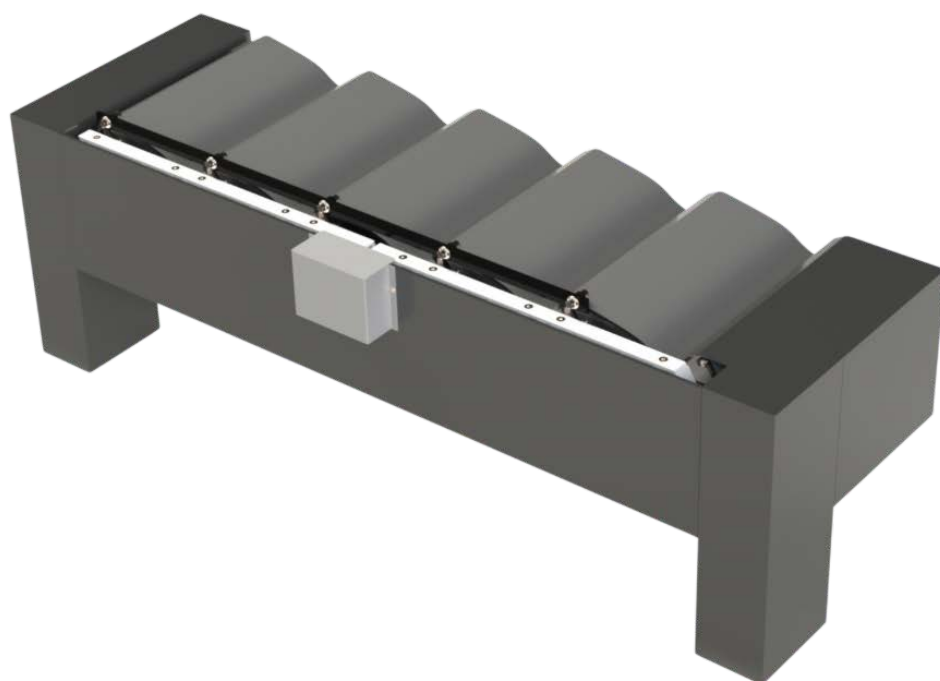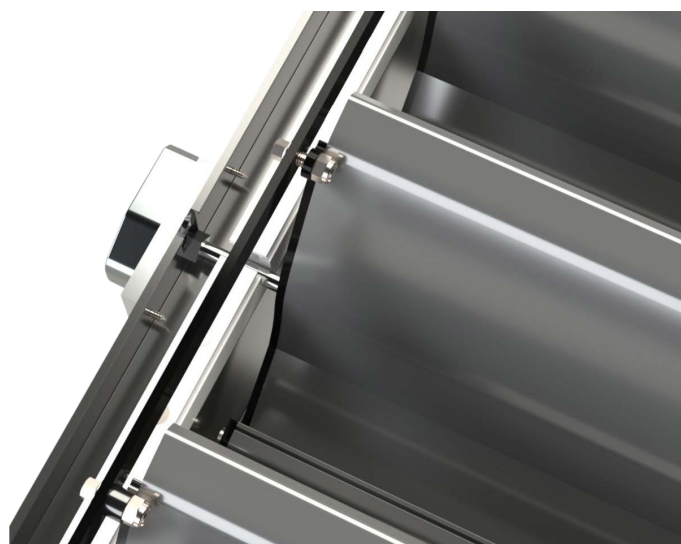

## Motorised

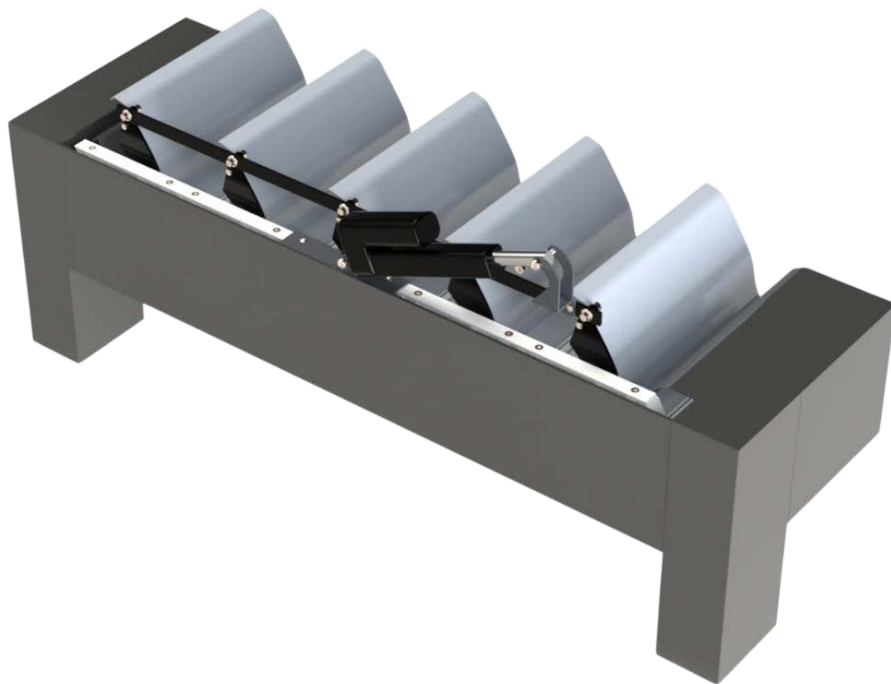

The motorized model of Biorise allows you to use the product without the need for any physical movement

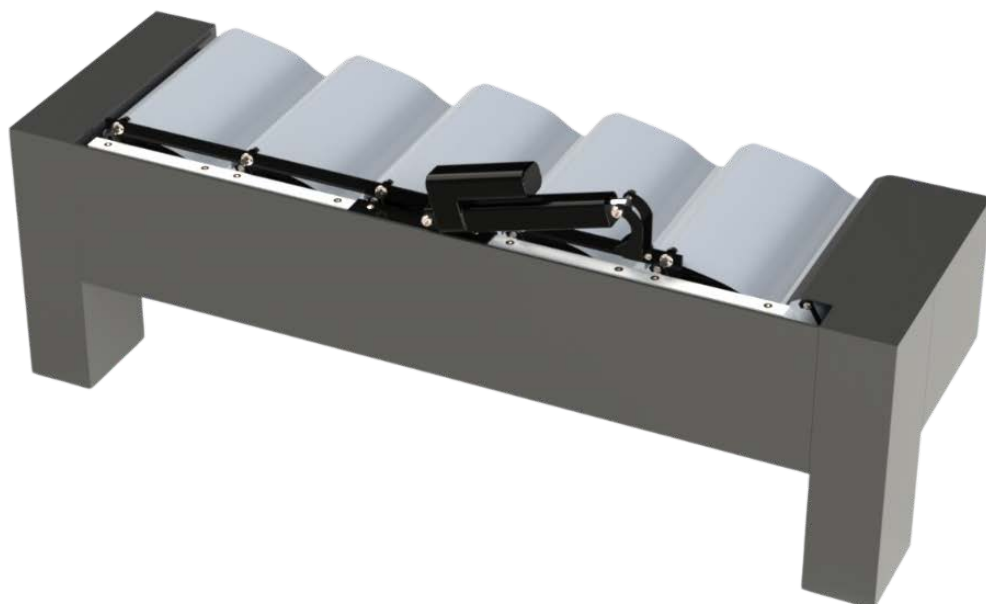



Akçaburgaz Mh. 3132 Sk. No:11-13  
Esenyurt 34522 İstanbul / Türkiye

risingoutdoor.com |    risingoutdoor | 90 212 444 1 886