


Nama : Ayu Andira Etterwan
 Nim : 09010282327022
 Kelas : MI3A
 Mata kuliah : prkatikum jaringan komputer

LAPORAM PRAKTIKUM

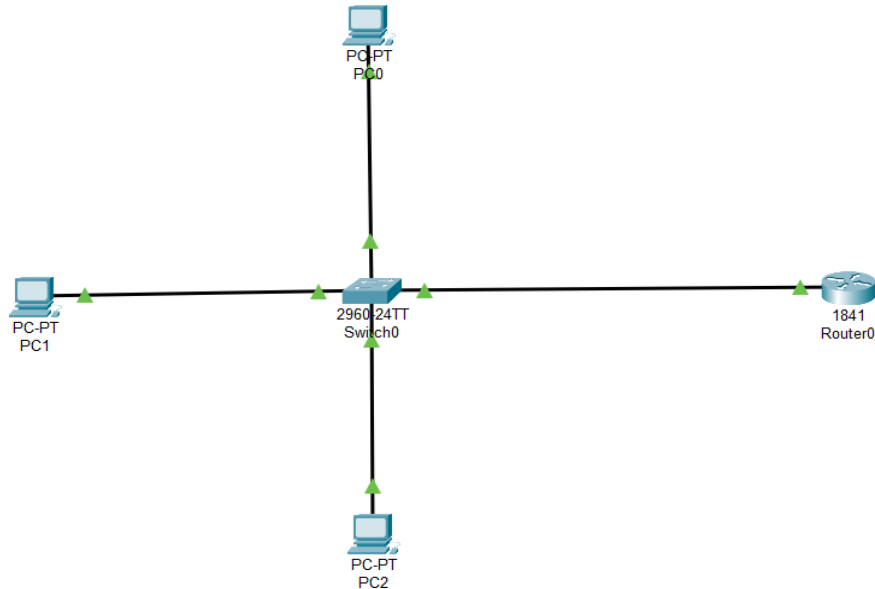

```

switch_09010282327022#copy run start
Destination filename [startup-config]?
Building configuration...
[OK]
switch_09010282327022#show vlan
  
```

VLAN	Name	Status	Ports
1	default	active	Fa0/4, Fa0/5, Fa0/6, Fa0/7 Fa0/8, Fa0/9, Fa0/10, Fa0/11 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/22, Fa0/23 Fa0/24, Gig0/1, Gig0/2
2	humas	active	Fa0/1
3	keuangan	active	Fa0/2
4	IT	active	Fa0/3
5	pimpinan	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
2	enet	100002	1500	-	-	-	-	-	0	0

--More--

Vlan	Name	Status	Port
1	Default	Active	Fa0/4, Fa0/5, Fa0/6, Fa0/7, Fa0/8, Fa0/9, Fa0/10, Fa0/11, Fa0/12, Fa0/13, Fa0/14, Fa0/15, Fa0/16, Fa0/18, Fa0/19, Fa0/20, Fa0/21, Fa0/22, Fa0/23, Fa0/24, Gig0/1, Gig0/2
2	Humas	Active	Fa0/1
3	Keuangan	Active	Fa0/2
4	IT	Active	Fa0/3
5	Pimpinan	Active	

No	Sumber	tujuan	Hasil	
			Ya	Tidak
1	PC 1	Pc 2	Ya	
		Pc 3	Ya	

2	PC 2	Pc 1	Ya	
		Pc 3	Ya	

3	PC 3	Pc 1	Ya	
		Pc 2	Ya	

PC 1

```
C:\>ping 192.168.100.2

Pinging 192.168.100.2 with 32 bytes of data:

Reply from 192.168.100.2: bytes=32 time<1ms TTL=127
Reply from 192.168.100.2: bytes=32 time<1ms TTL=127
Reply from 192.168.100.2: bytes=32 time<1ms TTL=127
Reply from 192.168.100.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.100.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.150.2

Pinging 192.168.150.2 with 32 bytes of data:

Reply from 192.168.150.2: bytes=32 time<1ms TTL=127
Reply from 192.168.150.2: bytes=32 time<1ms TTL=127
Reply from 192.168.150.2: bytes=32 time=16ms TTL=127
Reply from 192.168.150.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.150.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 16ms, Average = 4ms
```

PC 2

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.200.2

Pinging 192.168.200.2 with 32 bytes of data:

Reply from 192.168.200.2: bytes=32 time=1ms TTL=127
Reply from 192.168.200.2: bytes=32 time<1ms TTL=127
Reply from 192.168.200.2: bytes=32 time<1ms TTL=127
Reply from 192.168.200.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.200.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.150.2

Pinging 192.168.150.2 with 32 bytes of data:

Reply from 192.168.150.2: bytes=32 time=3ms TTL=128
Reply from 192.168.150.2: bytes=32 time=10ms TTL=128
Reply from 192.168.150.2: bytes=32 time=7ms TTL=128
Reply from 192.168.150.2: bytes=32 time=8ms TTL=128

Ping statistics for 192.168.150.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 3ms, Maximum = 10ms, Average = 7ms
```

PC 3

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.200.2

Pinging 192.168.200.2 with 32 bytes of data:

Reply from 192.168.200.2: bytes=32 time<1ms TTL=127
Reply from 192.168.200.2: bytes=32 time=1ms TTL=127
Reply from 192.168.200.2: bytes=32 time<1ms TTL=127
Reply from 192.168.200.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.200.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.100.2

Pinging 192.168.100.2 with 32 bytes of data:

Reply from 192.168.100.2: bytes=32 time=18ms TTL=128
Reply from 192.168.100.2: bytes=32 time=7ms TTL=128
Reply from 192.168.100.2: bytes=32 time=8ms TTL=128
Reply from 192.168.100.2: bytes=32 time=8ms TTL=128

Ping statistics for 192.168.100.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 7ms, Maximum = 18ms, Average = 10ms
```