


Three-bay three-storey frame elevation

Edited grid: x = 4000 mm · N3_3 vertical load: −68000 N · Undeformed member centrelines

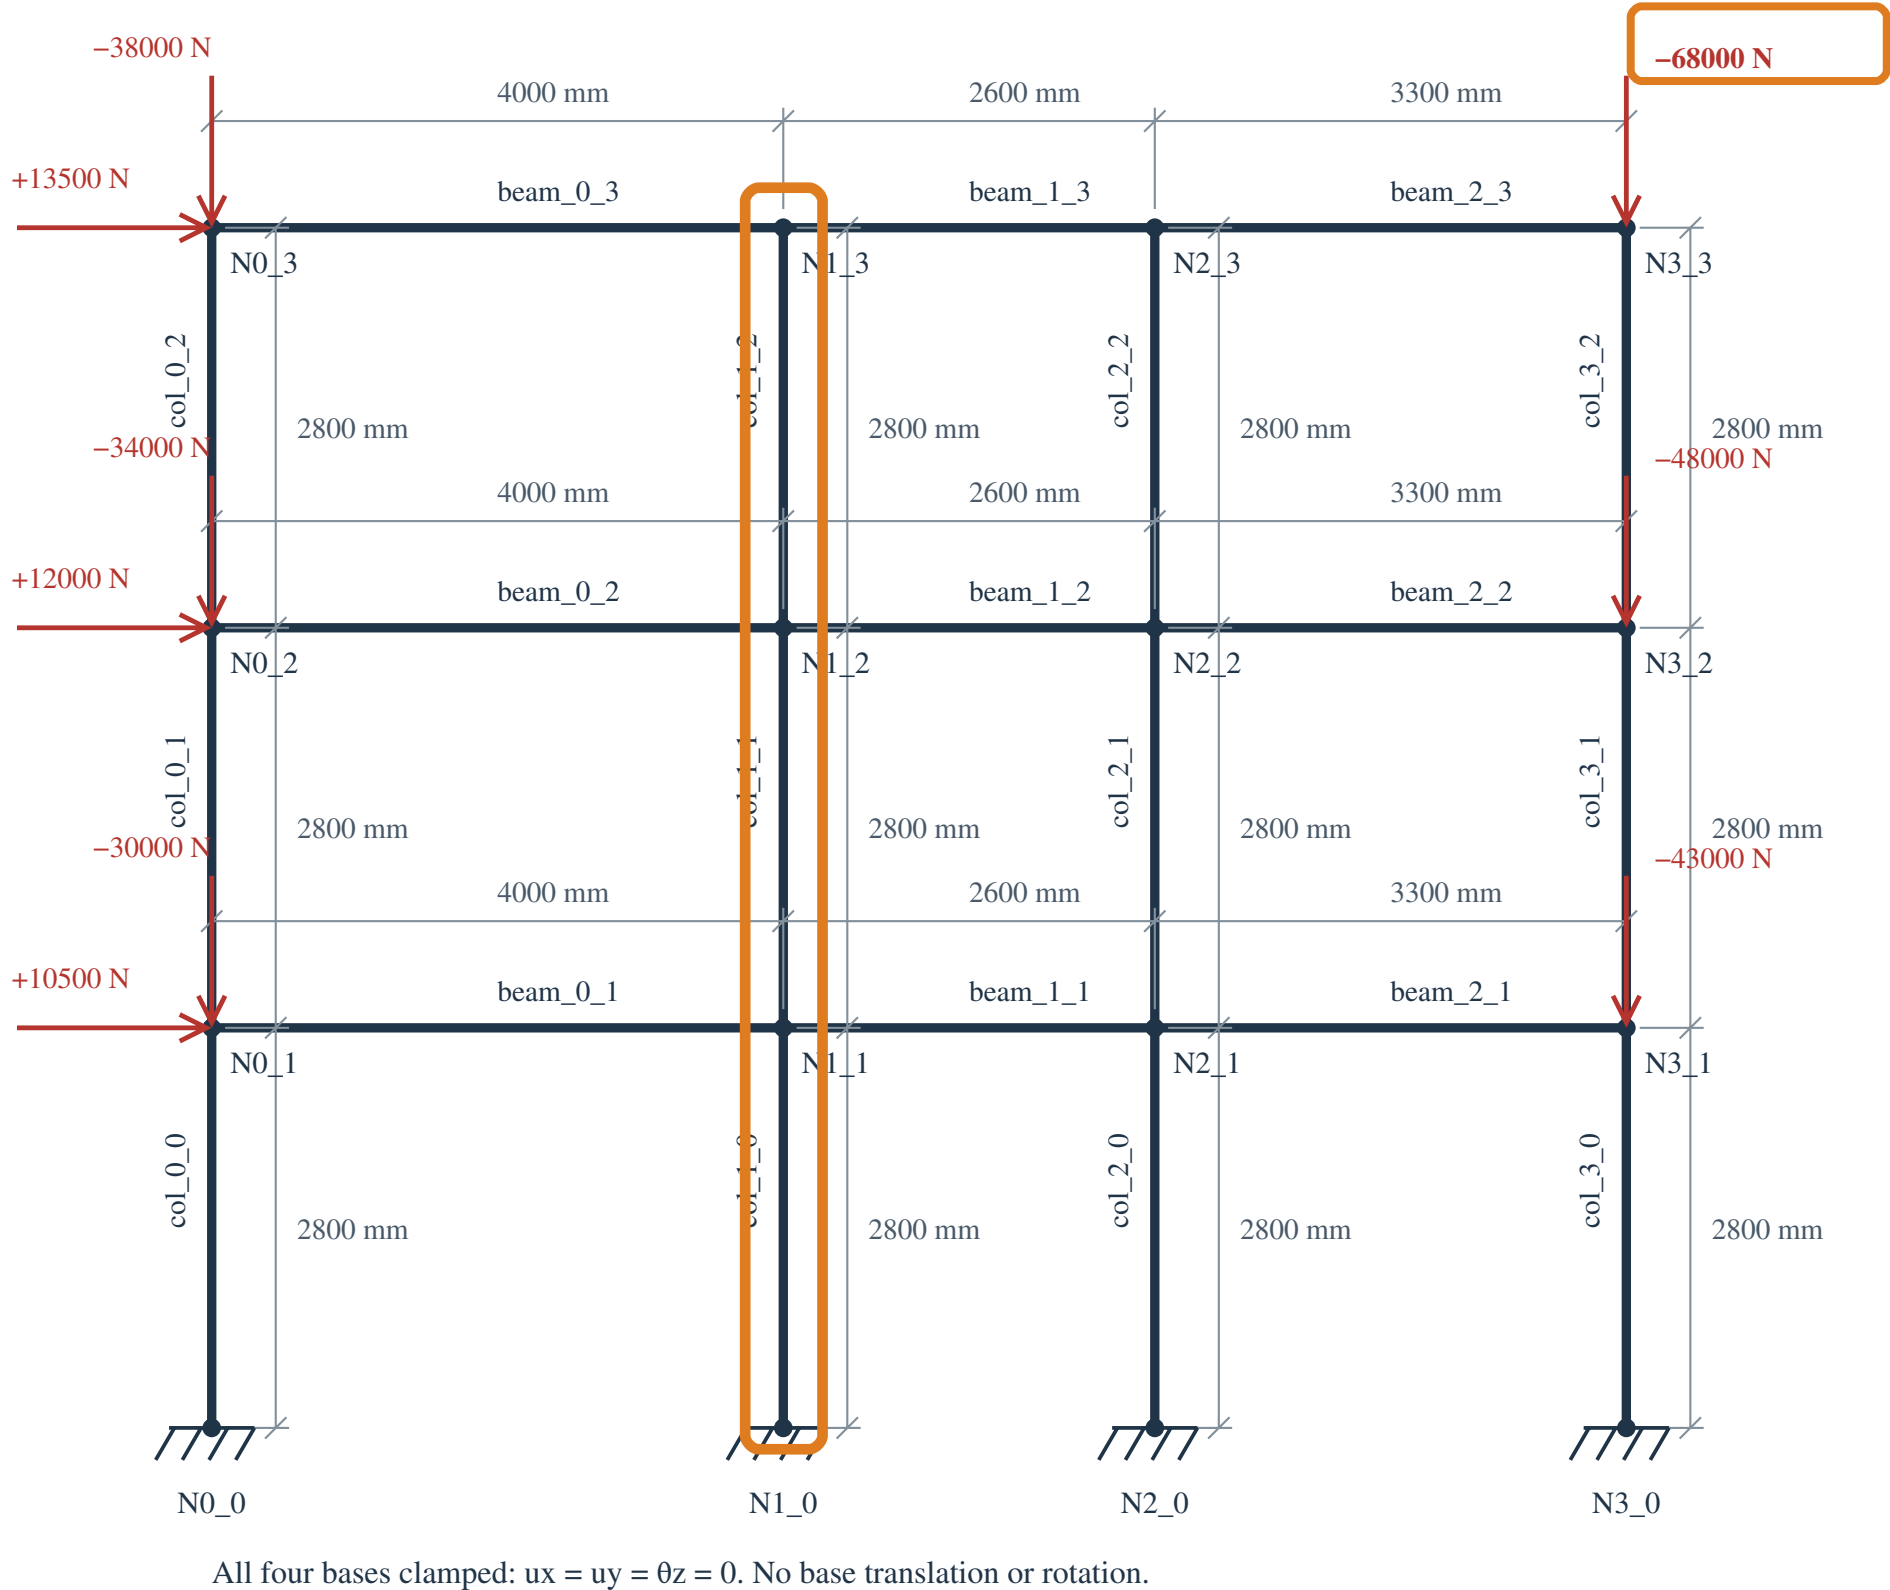

SECTION SCHEDULE

Solid rectangles · b × h in mm

col_i_0	160 × 200
col_i_1	140 × 180
col_i_2	140 × 160
beam_i_1	140 × 260
beam_i_2	140 × 240
beam_i_3	140 × 220

Columns: i = 0...3; beams: i = 0...2.

h in plane; b out of plane.

All members: E = 200000 N/mm².

RESULTS — EDITED FRAME

Probe N3_3 · +ux right · +uy upward

ux: unavailable

uy: unavailable

Peak normal stress: unavailable

Edited-frame stiffness analysis not evaluated.

Original drawing results have not been reused.

LIMIT CHECKS — NOT DETERMINED

|uy(N3_3)| ≤ 12.0 mm: undetermined

Peak stress ≤ 180.0 MPa: undetermined

Stress definition, across all member ends:

max [|N|/A + |M|(h/2)/I], I = bh³/12

MODEL AND DRAWING NOTES

Rigid joints; linear elasticity and small displacements; axial and Euler–Bernoulli bending only. Loads act at the indicated nodes only.

Omitted: shear deformation, self-weight, buckling, out-of-plane behaviour and connection flexibility. Applied nodal moments are zero.

Dimensions are physical centreline lengths in mm. Load arrows are schematic, not force-scaled. All other nodes, sections and loads are unchanged.

Coordinate map: X = 100 + (3/56)x; Y = 610 − (3/56)y. Physical x and y in mm; drawing coordinates in SVG units.

Only the stated 2D frame is represented. Any future pass applies only to its named check, not to complete object or building safety.