


Held-out H100 CAD edits: partial / failed edits


propeller bore widen compute | T4 | IoU 0.63155

Remove one of the two propeller blades; keep the hub, spinner, and the remaining blade.


SOURCE

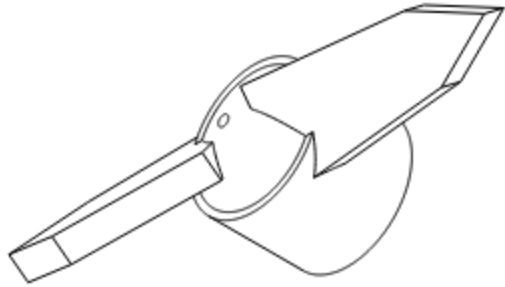

RELEASED TARGET




H100 PREDICTION

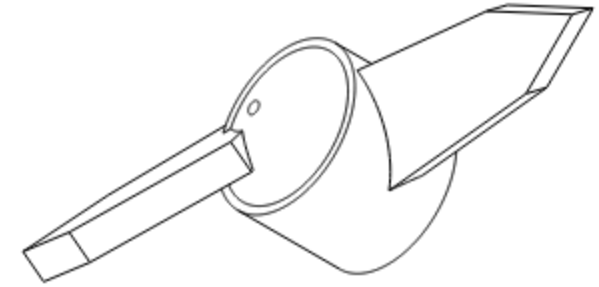


t5hard pan head screw U a | T5 | IoU 0.58449

Replace the round pan head of the screw with a square head of the same across-flats width and the same thickness, keeping the threaded shaft, the screwdriver slot, and the rounded top edge unchanged.


SOURCE

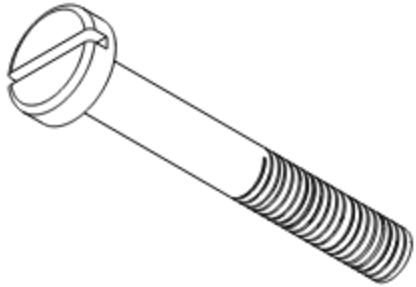

RELEASED TARGET

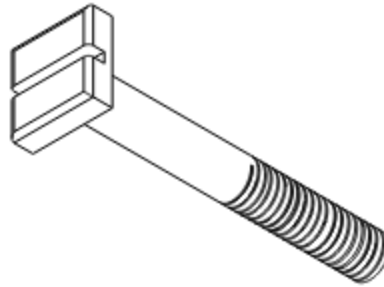

H100 PREDICTION

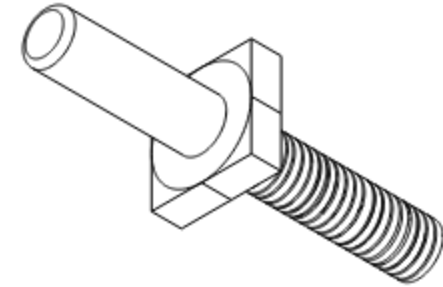

t5hard round flange V a | T5 | IoU 0.92018

Change the ring of 4 polar mounting through-passages on the flange face to a ring of 6 mounting through-passages of the same diameter, evenly spaced around the central axis at the same radius.

SOURCE



RELEASED TARGET



H100 PREDICTION

