



Scenario-defined FEM: target and actual H100 output

mounting angle box x f130
Released target

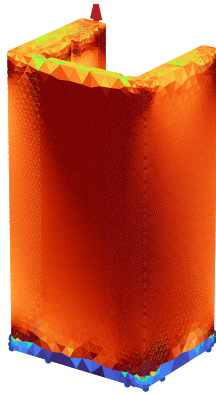


C = 7.484e-07 N mm; 141,883 tets

locator block box y f130
Released target

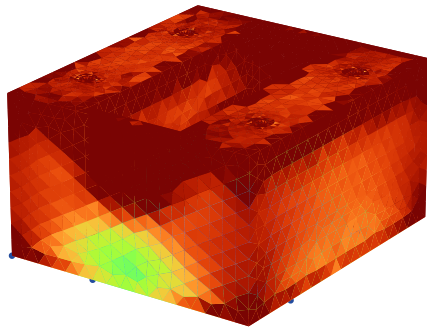


C = 3.742e-08 N mm; 54,450 tets

t3medplus stepped shaft rot diag60
Released target

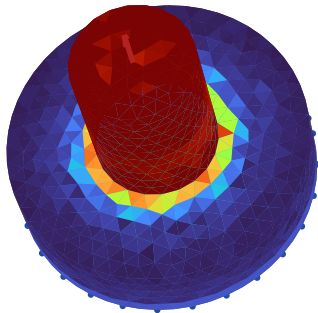


C = 5.287e-07 N mm; 6,866 tets

mounting angle box x f130
Actual final-adapter prediction

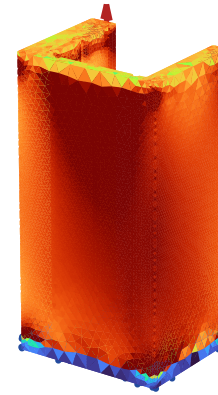


C = 7.464e-07 N mm; 143,709 tets

locator block box y f130
Actual final-adapter prediction



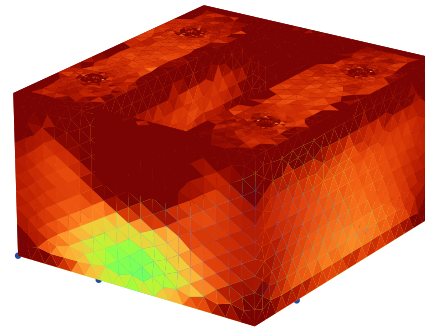


C = 3.742e-08 N mm; 54,621 tets

t3medplus stepped shaft rot diag60
Actual final-adapter prediction

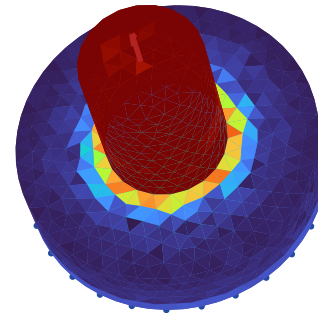

C = 5.291e-07 N mm; 6,825 tets

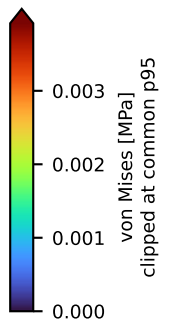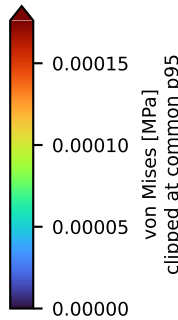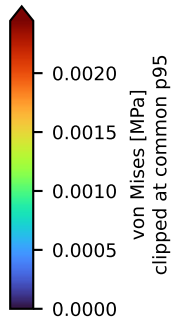

Assumed E = 210,000 MPa, nu = 0.3; 1 N test load. Blue: fixed nodes; red: load direction.
Undeformed meshes; compliance mesh check only. Stress fields are diagnostic, not a strength/safety verdict.