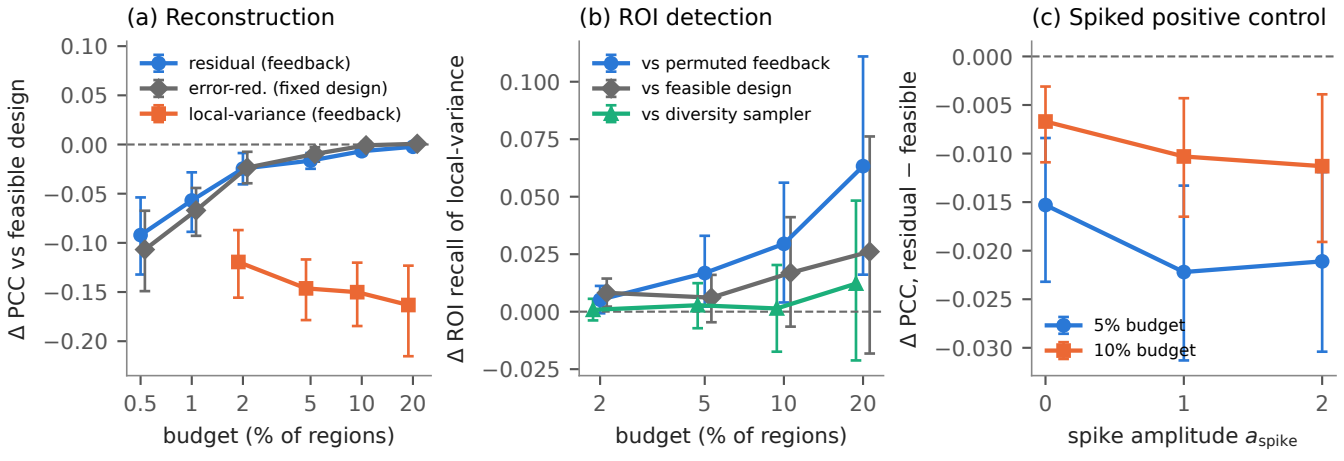
(a) Reconstruction
residual (feedback)
error-red. (fixed design)
local-variance (feedback)
Δ PCC vs feasible design
budget (% of regions)
(b) ROI detection
vs permuted feedback
vs feasible design
vs diversity sampler
Δ ROI recall of local-variance
budget (% of regions)
(c) Spiked positive control
5% budget
10% budget
Δ PCC, residual − feasible
spike amplitude a_{spike}