

GATE VALVE

DESIGN STANDARD	: API 600/BS 1414
FACE TO FACE DIMENSIONS	: ANSI B 16.10/ BS 2080
PRESSURE RATING	: 150/300/600 PSIG.
ENDS	: FLANGED TO ANSI B16.5 BW TO ANSI B16.25
TESTING STANDARD	: API 598/ BS 5146

MATERIAL SPECIFICATION

SR.NO.	PART NAME	MATERIAL OF CONSTRUCTION
1	BODY	ASTMA-216 GR WCB.
2	BONNET	ASTMA-216 GR WCB.
3	WEDGE	ASTMA-216 GR WCB. WITH 13% CR. DEPOSIT.
4	SEATRING	CARBON STEEL WITH 13% CR. FACING.
5	STEM	AISI 410
6	GLAND	AISI 410
7	BONNET BUSH	AISI 410
8	GASKET	CAF/SS-304 SPIRAL WOUND/SOFT IRON.
9	PACKING	GRAFITED ASBESTOS
10	STUDS	ASTMA-193 B7.
11	NUTS	ASTMA-194 2H.
12	SLEEVE	BRASS OR S. G. IRON
13	HANDWHEEL	MALLEABLE IRON.

OTHER MATERIAL AVAILABLE ON REQUEST	: ASTM A- 351 CF8/CF8M CF3/CF3M ALLOY-20, HASTALLOY B&C
--	---

GATE VALVE DIMENSIONS

GATE VALVE CLASS 150				GATE VALVE CLASS 300				GATE VALVE CLASS 600			
SIZE	A	FO	H	SIZE	A	FO	H	SIZE	A	FO	H
25	127	108	210	25	165	124	210	25	216	124	210
40	165	127	275	40	191	156	350	40	241	156	365
50	178	152	410	50	216	165	430	50	292	165	445
65	190	178	480	65	241	191	515	65	330	191	520
80	203	191	530	80	283	210	540	80	356	210	517
100	229	229	640	100	305	254	640	100	432	273	725
125	254	254	750	125	381	279	800	125	508	330	970
150	267	279	820	150	403	318	850	150	559	356	1060
200	292	343	1055	200	419	381	1095	200	660	419	1150
250	330	406	1275	250	457	445	1280	250	787	508	1446
300	356	483	1525	300	502	521	1550	300	838	559	1640
350	381	533	1636	350	762	584	1635	350	889	603	1910
400	406	597	1835	400	838	648	1835	400	991	686	2020

A-FACE TO FACE DISTANCE F O FLANGE DIA. H HEIGHT.

SALIENT FEATURES

1. Outside screw rising stem construction, threads are away from the line fluid and easy to lubricate.
2. Yoke sleeve and handwheel assembly is so arranged in the yoke that removal of handwheel from the yoke sleeve would not cause wedge gate to fall down.
3. Backseating feature facilitate repacking of the stuffing box on line with the valve in fully open position.
4. Swinging eye bolt facilitate easy access to the stuffing box.
5. Seating screwed in to the body are replaceable.
6. Stellited wedge & seating can also be offered on special request.
7. In built wear life for long duration of service.
8. Body & bonnet made from high quality casting with liberal sections.
9. The valves of higher pressure and bigger sizes are provided with thrust bearings and also with gear drive arrangements.

BALL VALVE

DESIGN STANDARD : API 608, BS 5351

FACE TO FACE DIMENSIONS : ANSI B 16.10

MATERIAL OF CONSTRUCTION : a From Barstock in carbon steel or stainless steel (304, 316, 304L, 316L, 321), Hastalloy B & C & Alloy 20.

b Castings in carbon steel to ASTM A-216 GR. WCB.

c Castings in Stainless steel to ASTM A-351 GR. CF8/CF8M/CF8C/CF3/CF3M. Alloy 20, Hastalloy B & C.

SIZE RANGE

: 15 mm TO 250 mm

PRESSURE


: 150/300 psig

DESIGN

: Fire safe design available.

ENDS

: Screwed to BSP/BSPT/NPT for Sizes 15 mm to 50 mm, flanged to ANSI, DIN or BS standard for Sizes 15 MM to 250 MM, socket weld to ANSI B16.11 for Sizes 15 mm to 50 mm, butt weld to ANSI B16.25 for sizes 15 mm to 250 mm

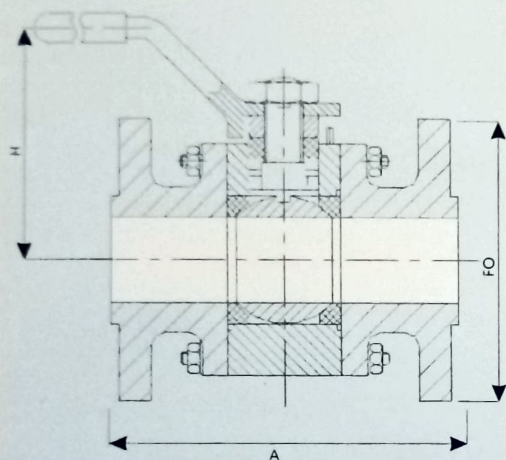

BALL VALVE DIMENSIONS

ASA - 150#				TABLE 'E'				TABLE 'F'			
SIZE	A	FO	H	SIZE	A	FO	H	SIZE	A	FO	H
15	108	95	95	15	108	95	95	15	108	95	95
20	118	86	100	20	118	101	100	20	118	101	100
25	127	108	105	25	127	114	105	25	127	120	105
40	165	127	125	40	165	133	125	40	165	140	125
50	178	152	145	50	178	152	145	50	178	165	145
65	190	178	190	65	190	165	190	65	190	184	190
80	203	191	190	80	203	184	190	80	203	203	190
100	229	229	260	100	229	216	260	100	229	228	260
150	267	279	340	150	267	279	340	150	267	305	340

A-FACE TO FACE DISTANCE, F O FLANGE DIA. H HEIGHT.

SALIENT FEATURES

1. Positive shut off
2. Longer life
3. Quick in action
4. No lubrication
5. Visual on/off indication
6. Compact design
7. Corrosion resistant
8. Low pressure drop
9. Simplicity

GLOBE VALVE


DESIGN STANDARD	: BS 1873
FACE TO FACE DIMENSIONS	: ANSI B 16.10
PRESSURE RATING	: 150/300/600 PSIG.
ENDS	: FLANGED TO ANSI B16.5 BW TO ANSI B16.25
TESTING STANDARD	: API 598/ BS 5146

MATERIAL SPECIFICATION

SR.NO.	PART NAME	MATERIAL OF CONSTRUCTION
1	BODY	ASTMA-216 GR WCB.
2	BONNET	ASTMA-216 GR WCB.
3	DISC	13% CR. FACING.
4	SEATRING	13% CR. FACING.
5	DISC NUT	AISI- 410
6	STEM	AISI - 410
7	GLAND	AISI - 410
8	BONNET BUSH	AISI 410
9	GASKET	SPRIAL WOUND SS-304
10	PACKING	GRAFITED ASBESTOS
11	STUDS	ASTMA-193 GR B7.
12	NUTS	ASTMA-194 GR 2H.
13	YOKE BUSH	BRASS OR S.G. IRON
14	HANDWHEEL	MALLEABLE IRON.

OTHER MATERIAL
AVAILABLE ON REQUEST

: ASTM A- 351 CF8/CF8M/ CF3/CF3M
ALLOY-20, HASTALLOY B&C

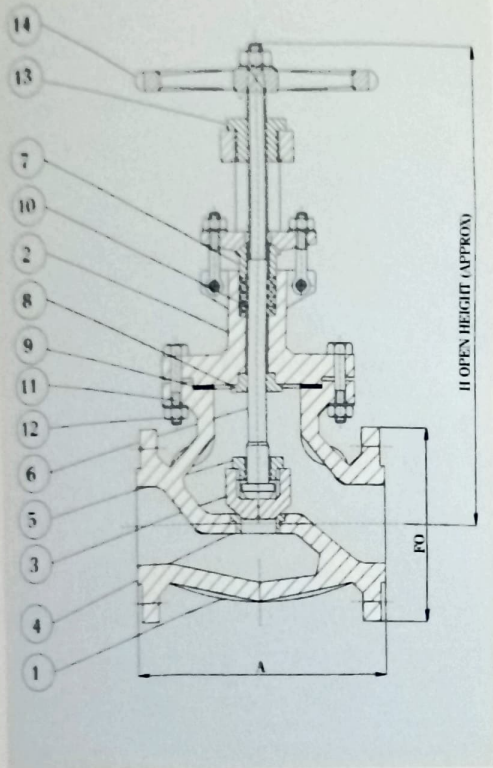

GLOBE VALVE DIMENSIONS

GLOBE VALVE CLASS 150

SIZE	A	FO	H
25	127	108	207
40	165	127	275
50	203	152	320
65	216	178	360
80	241	191	380
100	292	229	480
125	356	254	510
150	406	279	550
200	495	343	620
250	622	406	720
300	699	483	850

GLOBE VALVE CLASS 300

SIZE	A	FO	H
25	203	124	207
40	229	156	310
50	267	165	385
65	292	191	395
80	318	210	465
100	356	254	510
125	400	279	560
150	445	318	605
200	559	381	670
250	622	445	730
300	711	521	900

GLOBE VALVE CLASS 600

SIZE	A	FO	H
25	216	124	207
40	241	156	336
50	292	165	385
65	330	191	395
80	356	210	465
100	432	273	550
125	508	330	575
150	559	356	615
200	660	419	685
250	787	508	780
300	838	559	950

A-FACE TO FACE DISTANCE FO FLANGE DIA. H HEIGHT.

SALIENT FEATURES

1. Outside screw rising stem rising handwheel construction threads are away from fluid and easy to lubricate.
2. Body & bonnet made from high quality casting with liberal sections.
3. Seating screwed in to the body are replaceable.
4. Back seating feature facilitate repacking of the stuffing box on line with valve in fully open position.
5. Swinging eye bolt facilitate easy access to the stuffing box.
6. Plug type disc designed to give leak tight seating over a long period of in built wear life.
7. Stellite seating and disc can also be offered on special request.
8. The valves of higher pressure and bigger sizes are provided with gear drive arrangements.


NON RETURN VALVE

DESIGN STANDARD	: BS 1868
FACE TO FACE DIMENSIONS	: ANSI B 16.10
PRESSURE RATING	: 150/300/600 PSIG.
ENDS	: FLANGED TO ANSI B16.5 BW TO ANSI B16.25
TESTING STANDARD	: API 598/ BS 5146

MATERIAL SPECIFICATION

SR.NO.	PART NAME	MATERIAL OF CONSTRUCTION
1	BODY	ASTMA-216 GR WCB.
2	COVER	ASTMA-216 GR WCB.
3	DISC	ASTMA-216 GR WCB. WITH 13% CR. DEPOSIT.
4	HINGE	ASTMA-216 GR WCB
5	BRACKET	ASTMA-216 GR WCB
6	SEATRING	CARBON STEEL WITH 13% CR. FACING.
7	HINGE PIN	AISI 410
8	GASKET	SPRIAL WOUND SS-304
9	STUDS	ASTM A-193 B7.
10	NUTS	ASTMA-194 2H.

OTHER MATERIAL
AVAILABLE ON REQUEST : ASTM A- 351 CF8/CF8M /CF3/CF3M
ALLOY-20, HASTALLOY B&C

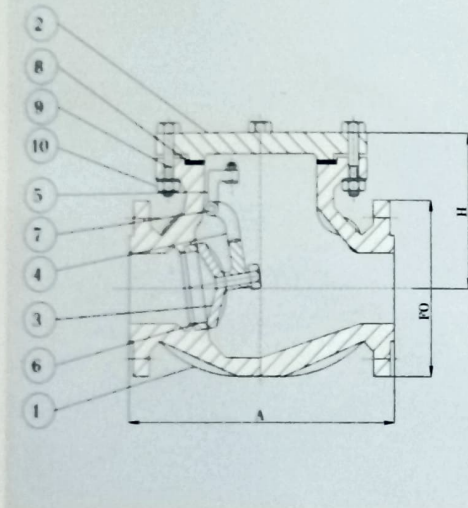

NON RETURN VALVE DIMENSIONS

NRV CLASS 150				NRV CLASS 300				NRV CLASS 600			
SIZE	A	FO	H	SIZE	A	FO	H	SIZE	A	FO	H
25	127	108	-	25	203	124	-	25	216	124	-
40	165	127	-	40	229	156	-	40	241	156	-
50	203	152	320	50	267	165	160	50	292	165	160
65	216	178	360	65	292	191	175	65	330	191	205
80	241	191	380	80	318	210	190	80	356	210	225
100	292	229	480	100	356	254	210	100	432	273	245
125	330	254	510	125	400	279	230	125	508	330	290
150	356	279	550	150	445	318	250	150	559	356	325
200	495	343	620	200	533	381	300	200	660	419	405
250	622	406	720	250	622	445	395	250	787	508	490
300	699	483	850	300	711	521	430	300	838	559	530

A-FACE TO FACE DISTANCE F O FLANGE DIA. H HEIGHT.

SALIENT FEATURES

1. Body seating and disc machined to close Tolerances providing smooth action and accurate seating
2. Low centre of gravity in the disc ensures prompt return of the disc to its seat against the back pressure.
3. Screwed in Seating is replaceable.
4. Stellite seating and disc can also be offered on special request.
5. In built wear life for long duration in service.