

Problem Set-4

✓ **Problem.1** A router has the following (CIDR) entries in its routing table:

Address/mask	Next hop
135.46.56.0/22	Interface 0
135.46.60.0/22	Interface 1
192.53.40.0/23	Router 1
default	Router 2

For each of the following IP addresses, what does the router do if a packet with that address arrives?

- a. 135.46.63.10
 - b. 135.46.57.14
 - c. 135.46.52.2
 - d. 192.53.40.7
 - e. 192.53.56.7
- 11111100 and 00111001 = 00111000

✓ **Problem.2** A large number of consecutive IP address are available starting at 198.16.0.0. Suppose that four organizations, A, B, C, and D, request 4000, 2000, 4000, and 8000 addresses, respectively, and in that order. For each of these, give the first IP address assigned, the last IP address assigned, and the mask in the w.x.y.z/s notation.

✓ **Problem.3** Suppose that host A is connected to a router R 1, R 1 is connected to another router, R 2, and R 2 is connected to host B. Suppose that a TCP message that contains 900 bytes of data and 20 bytes of TCP header is passed to the IP code at host A for delivery to B. Show the Total length, Identification, DF, MF, and Fragment offset fields of the IP header in each packet transmitted over the three links. Assume that link A-R1 can support a maximum frame size of 1024 bytes including a 14-byte frame header, link R1-R2 can support a maximum frame size of 512 bytes, including an 8-byte frame header, and link R2-B can support a maximum frame size of 512 bytes including a 12-byte frame header.

pending

Problem.4 Consider the network shown below, with the indicated link costs. Use Dijkstra's shortest path algorithm to compute the shortest path from F to all network nodes. Show all the iteration in different steps.

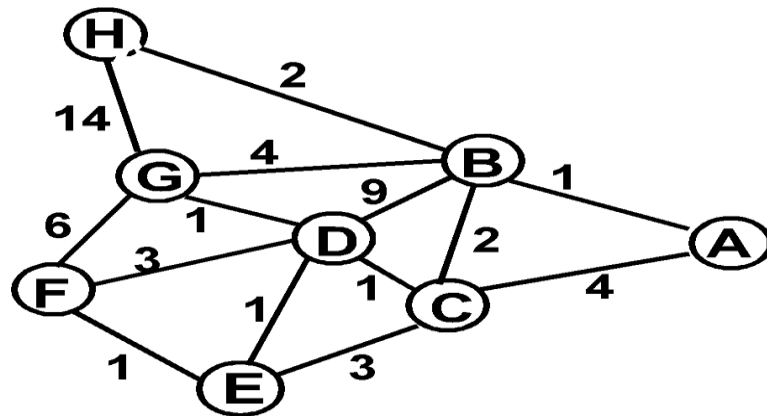


Figure-1

Problem.5 Consider the subnet of Fig. 2. Distance vector routing is used, and the following vectors have just come in to router C: from B: (5, 0, 8, 12, 6, 2); from D: (16, 12, 6, 0, 9, 10); and from E: (7, 6, 3, 9, 0, 4). The measured delays to B, D, and E, are 6, 3, and 5, respectively. What is C's new routing table? Give both the outgoing line to use and the expected delay.

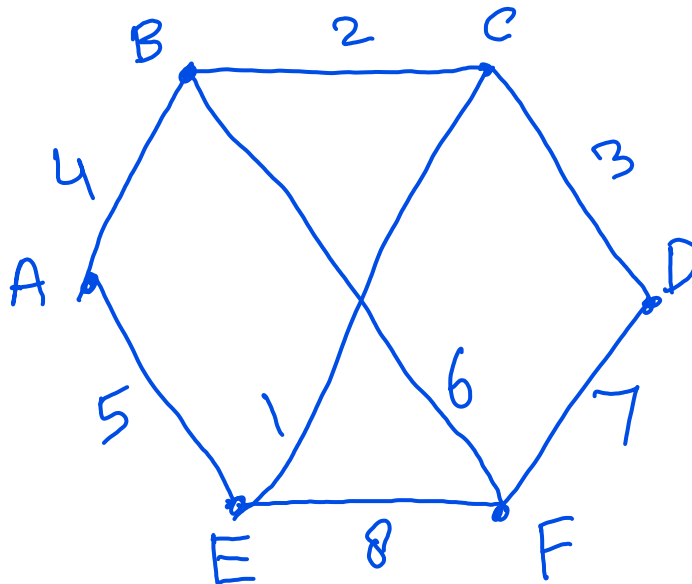


Figure-2