


## ORDERING INFORMATION

INSERTION/EXTRACTION FORCE PER CONTACT : 5 N Max./ 0.3 N Min.

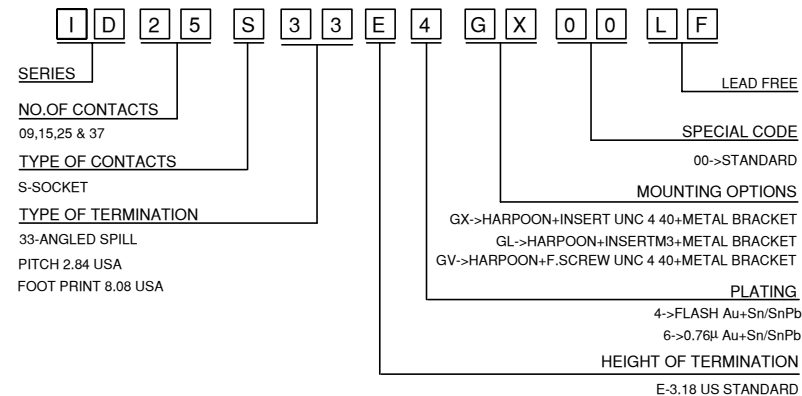

The housing will withstand exposure to 260°C peak temperature for 3.5 seconds in a wave solder application with a 1.6mm minimum thick circuit board.  
Packaging as per GS-14-920

Printed: Jan 18, 2011.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

[ID09S33E4GX00LF](#) [ID15S33E4GX00LF](#)