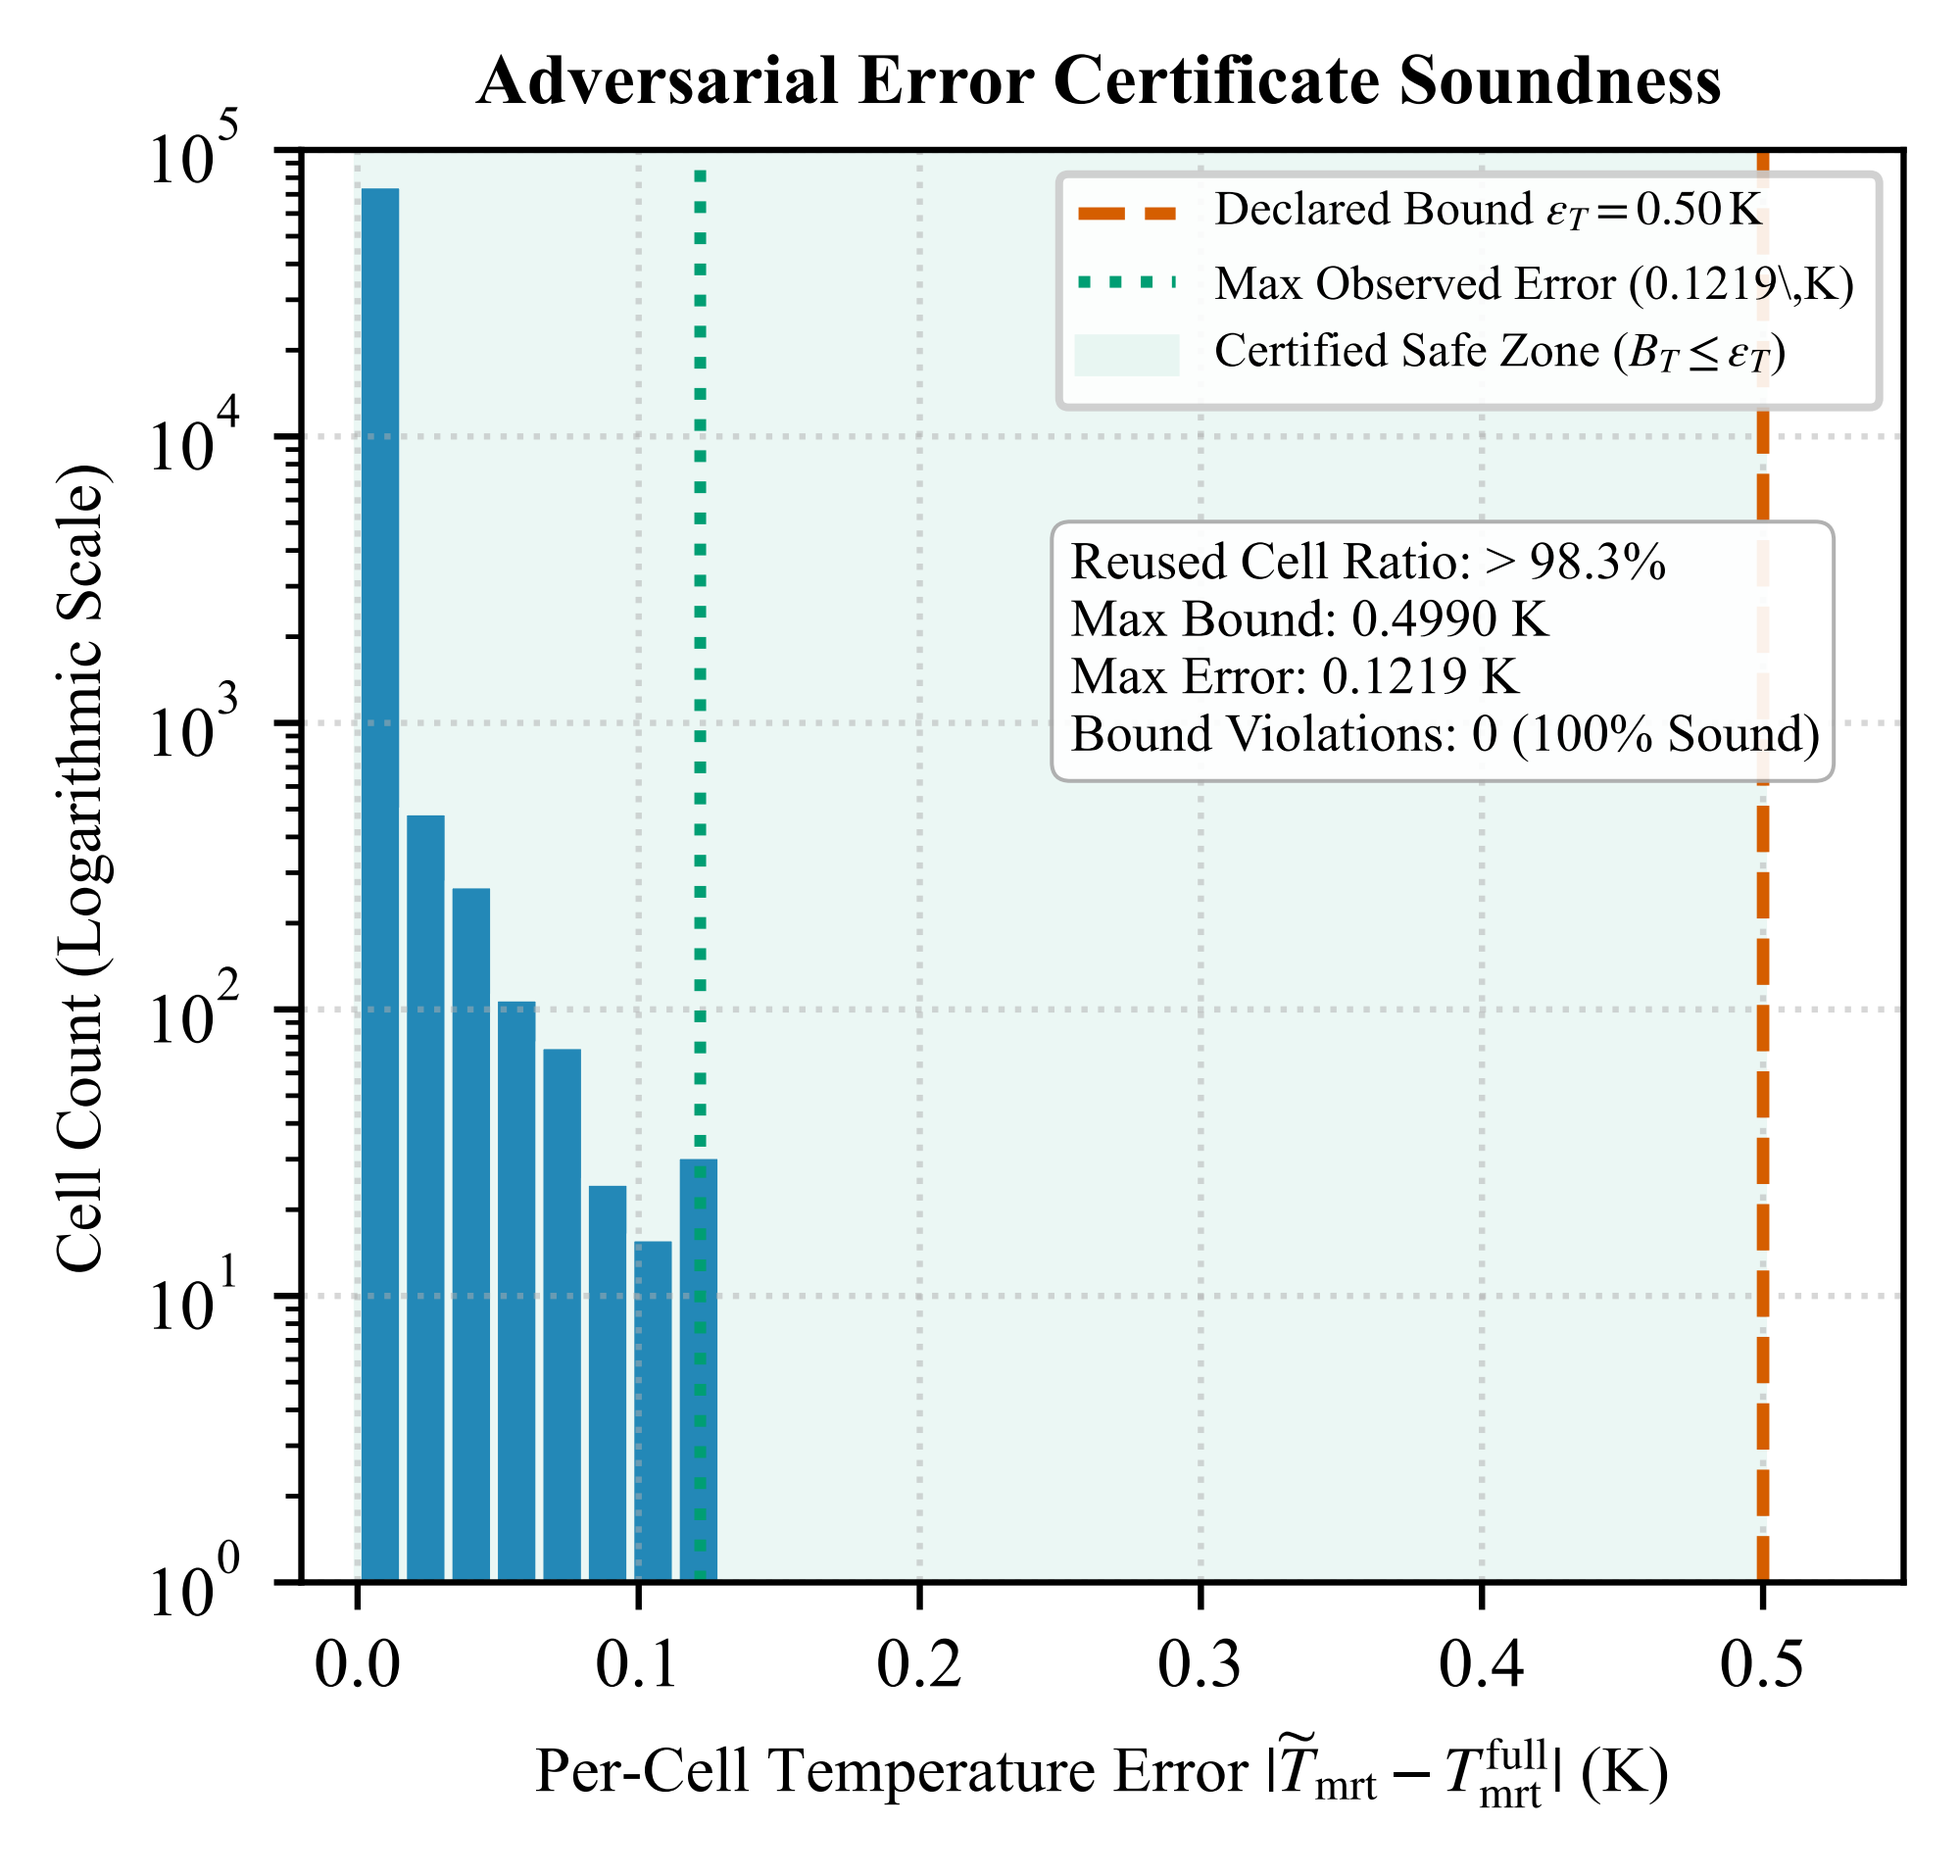
Adversarial Error Certificate Soundness
Declared Bound $\varepsilon_T = 0.50\,\mathrm{K}$
Max Observed Error (0.1219\,K)
Certified Safe Zone ($B_T \le \varepsilon_T$)
Reused Cell Ratio: > 98.3%
Max Bound: 0.4990 K
Max Error: 0.1219 K
Bound Violations: 0 (100% Sound)
Cell Count (Logarithmic Scale)
$10^0$
$10^1$
$10^2$
$10^3$
$10^4$
$10^5$
0.0
0.1
0.2
0.3
0.4
0.5
Per-Cell Temperature Error $|\widetilde{T}_{\mathrm{mrt}} - T^{\mathrm{full}}_{\mathrm{mrt}}|$ (K)