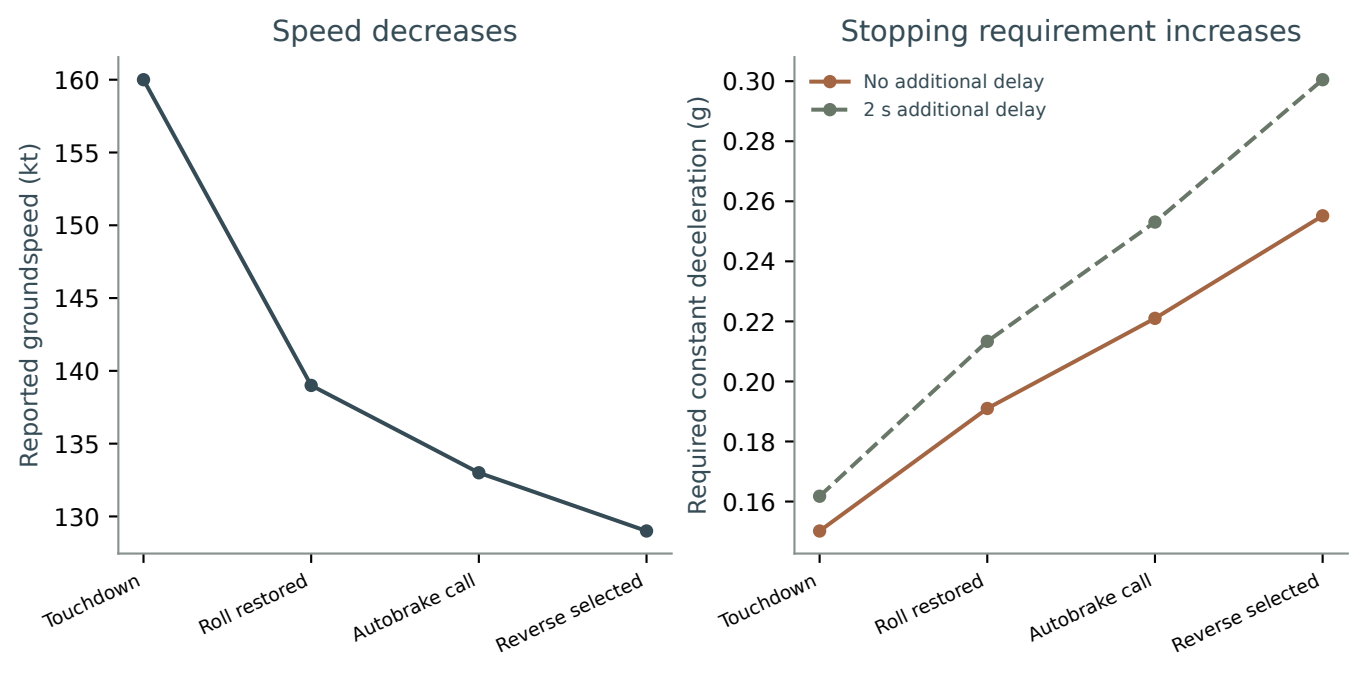
Speed decreases
Reported groundspeed (kt)
160
155
150
145
140
135
130
Touchdown
Roll restored
Autobrake call
Reverse selected
Stopping requirement increases
Required constant deceleration (g)
No additional delay
2 s additional delay
0.30
0.28
0.26
0.24
0.22
0.20
0.18
0.16
Touchdown
Roll restored
Autobrake call
Reverse selected