



EEE-3506: Programmable Logic Controllers

Prof. Dr. Sırrı Sunay Gürleyük

Arş. Gör. Ali Can Erüst

Design Project

Automated Industrial Glass-Processing
System

Group Members

Ahmet BARUT

Ahmad Zameer NAZARI



Automated Industrial Glass Processing System


Table of Contents

- Overview
- Process Flow
- Process Steps with Ladder Logic
 - Glass Handling
 - Conveyor to Glass Processor
 - Glass Processing
 - Cleaning
- HMI Page

Overview


The machining process is time-consuming, with steps like cutting, sorting, grinding, and washing. If all these processes are done on a single machine, we save a lot of time. This means we can have a faster overall process.

Process Flow

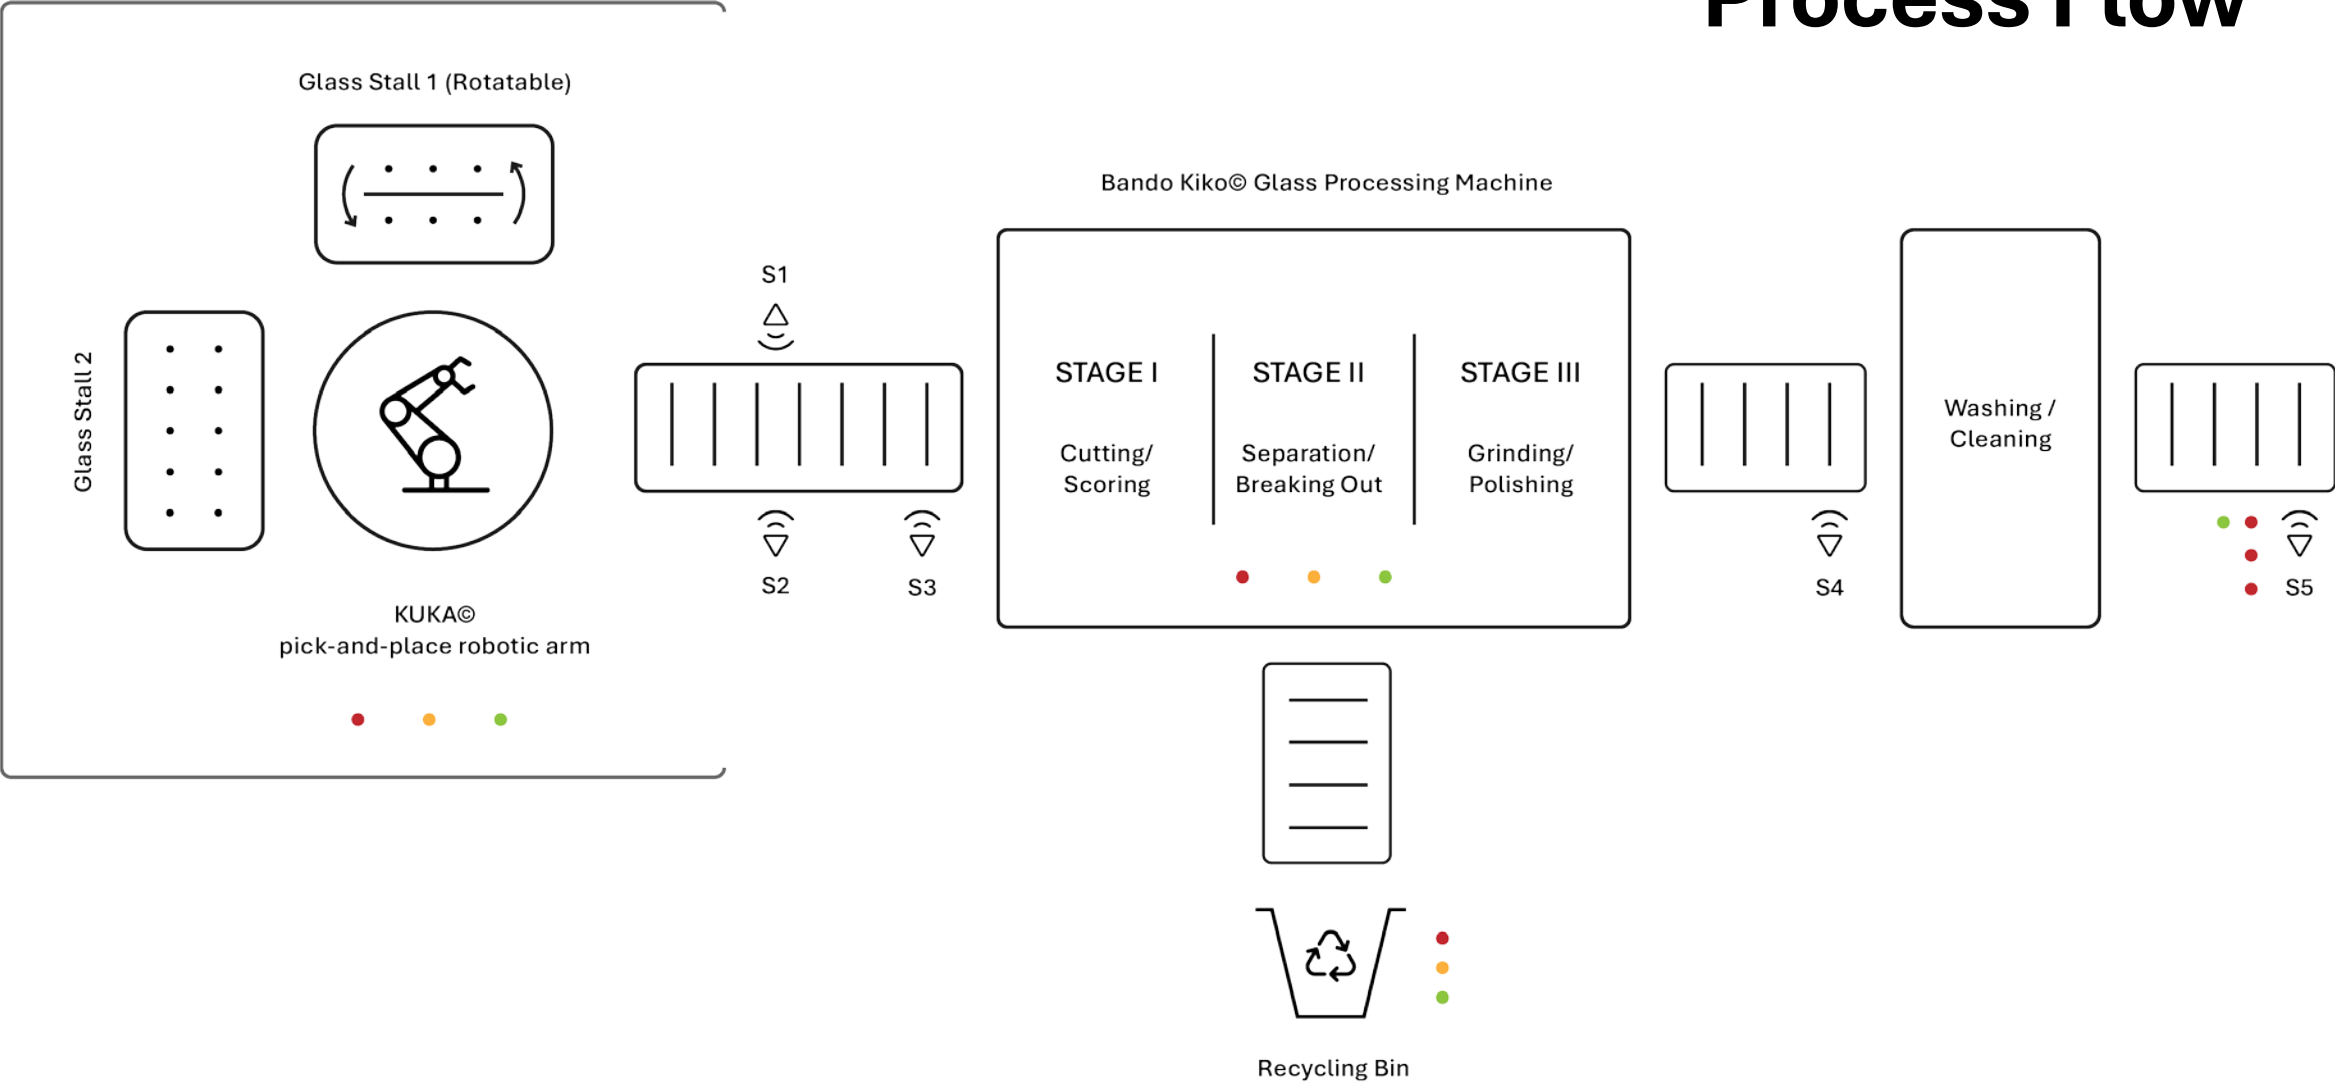

Ladder Logic


- START push button starts the entire process. It is latched by coil M00
- STOP ends it

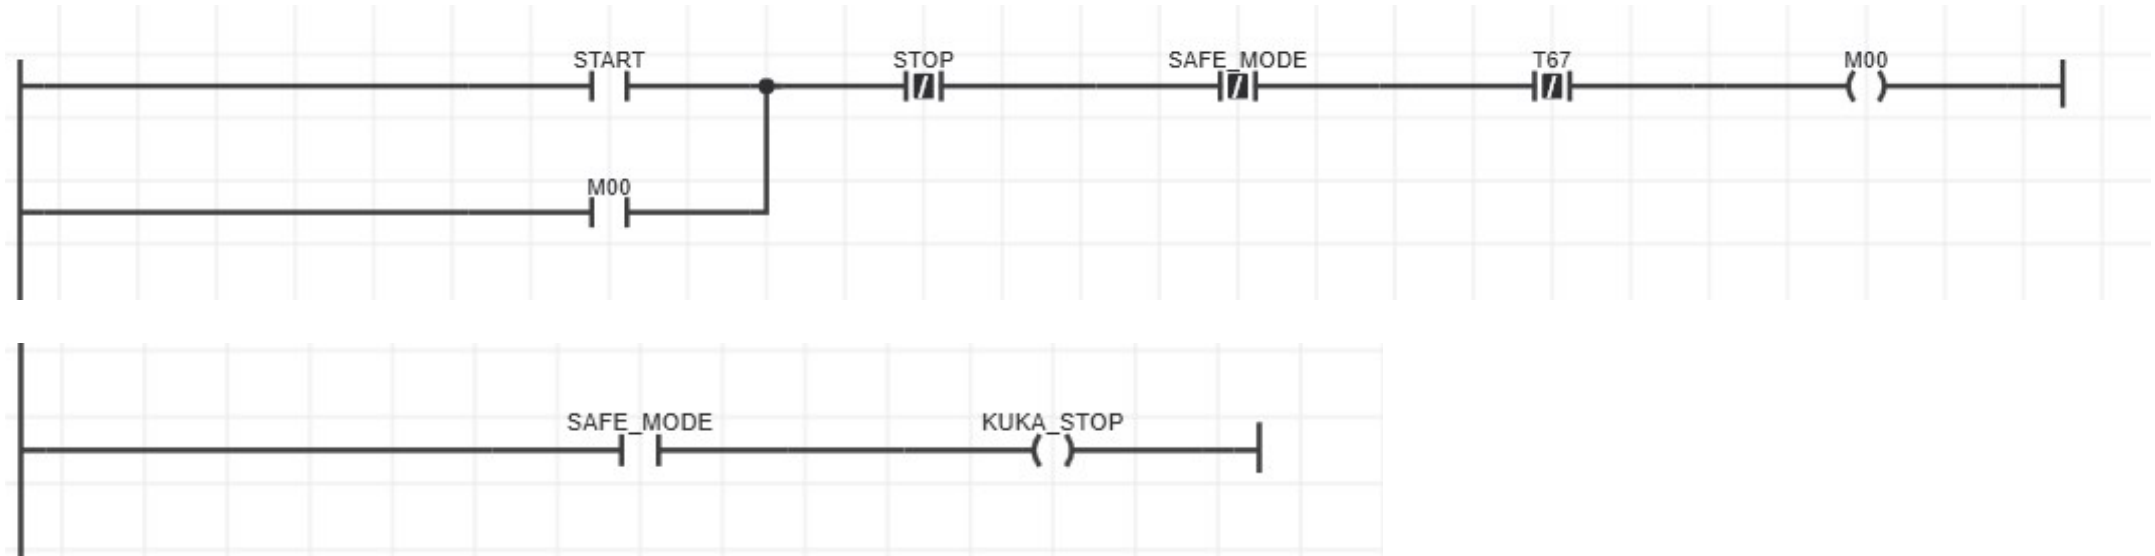


- Since the process begins with the KUKA robotic arm fetching glass from glass stalls, It is a potentially dangerous environment for a human operator to be around,
- So, the SAFE_MODE input stops the process and enables KUKA_STOP.

Glass Handling

- First, with the dexterity of the automated robotic arm, glass items are taken from the present glass trays and placed gently on the conveyer following it
- Glass stall 1 is rotatable and has 2 slots, while 2nd glass stall is fixed.
- Three lights of color green, yellow and red serve as indicators

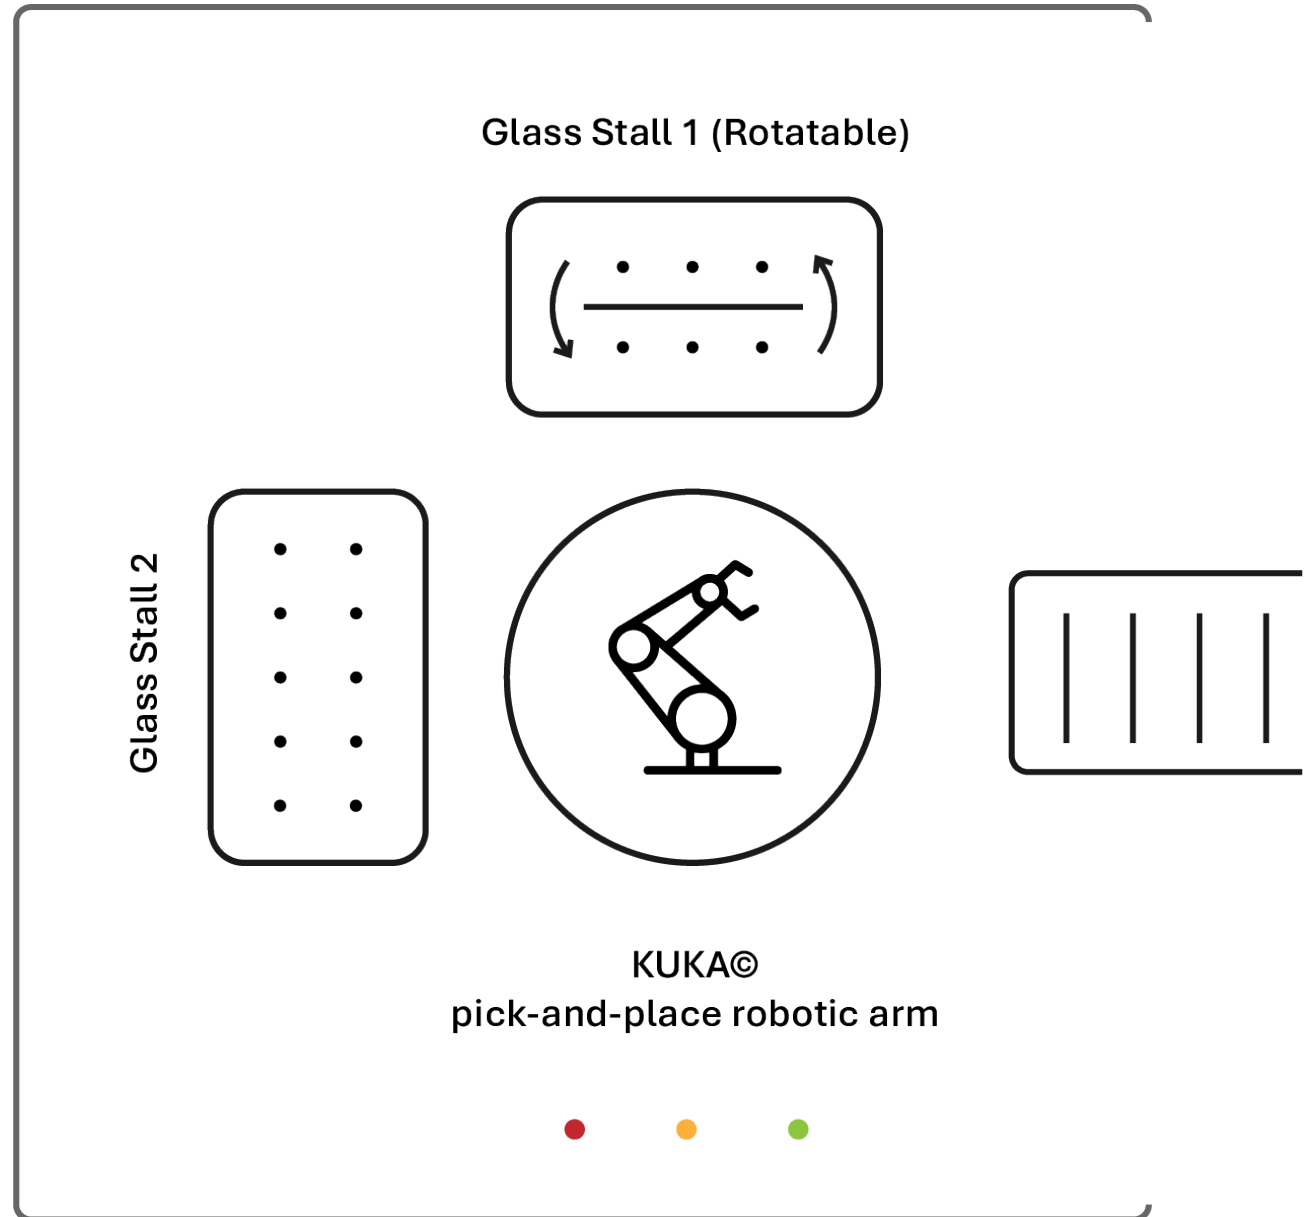


- KUKA has 3 modes:
- Slow (MOD_1), Moderate Speed (MOD_2) and Fast (MOD_3),
that each activate and latch output coils TIME_13, TIME_9 and TIME_6 respectively

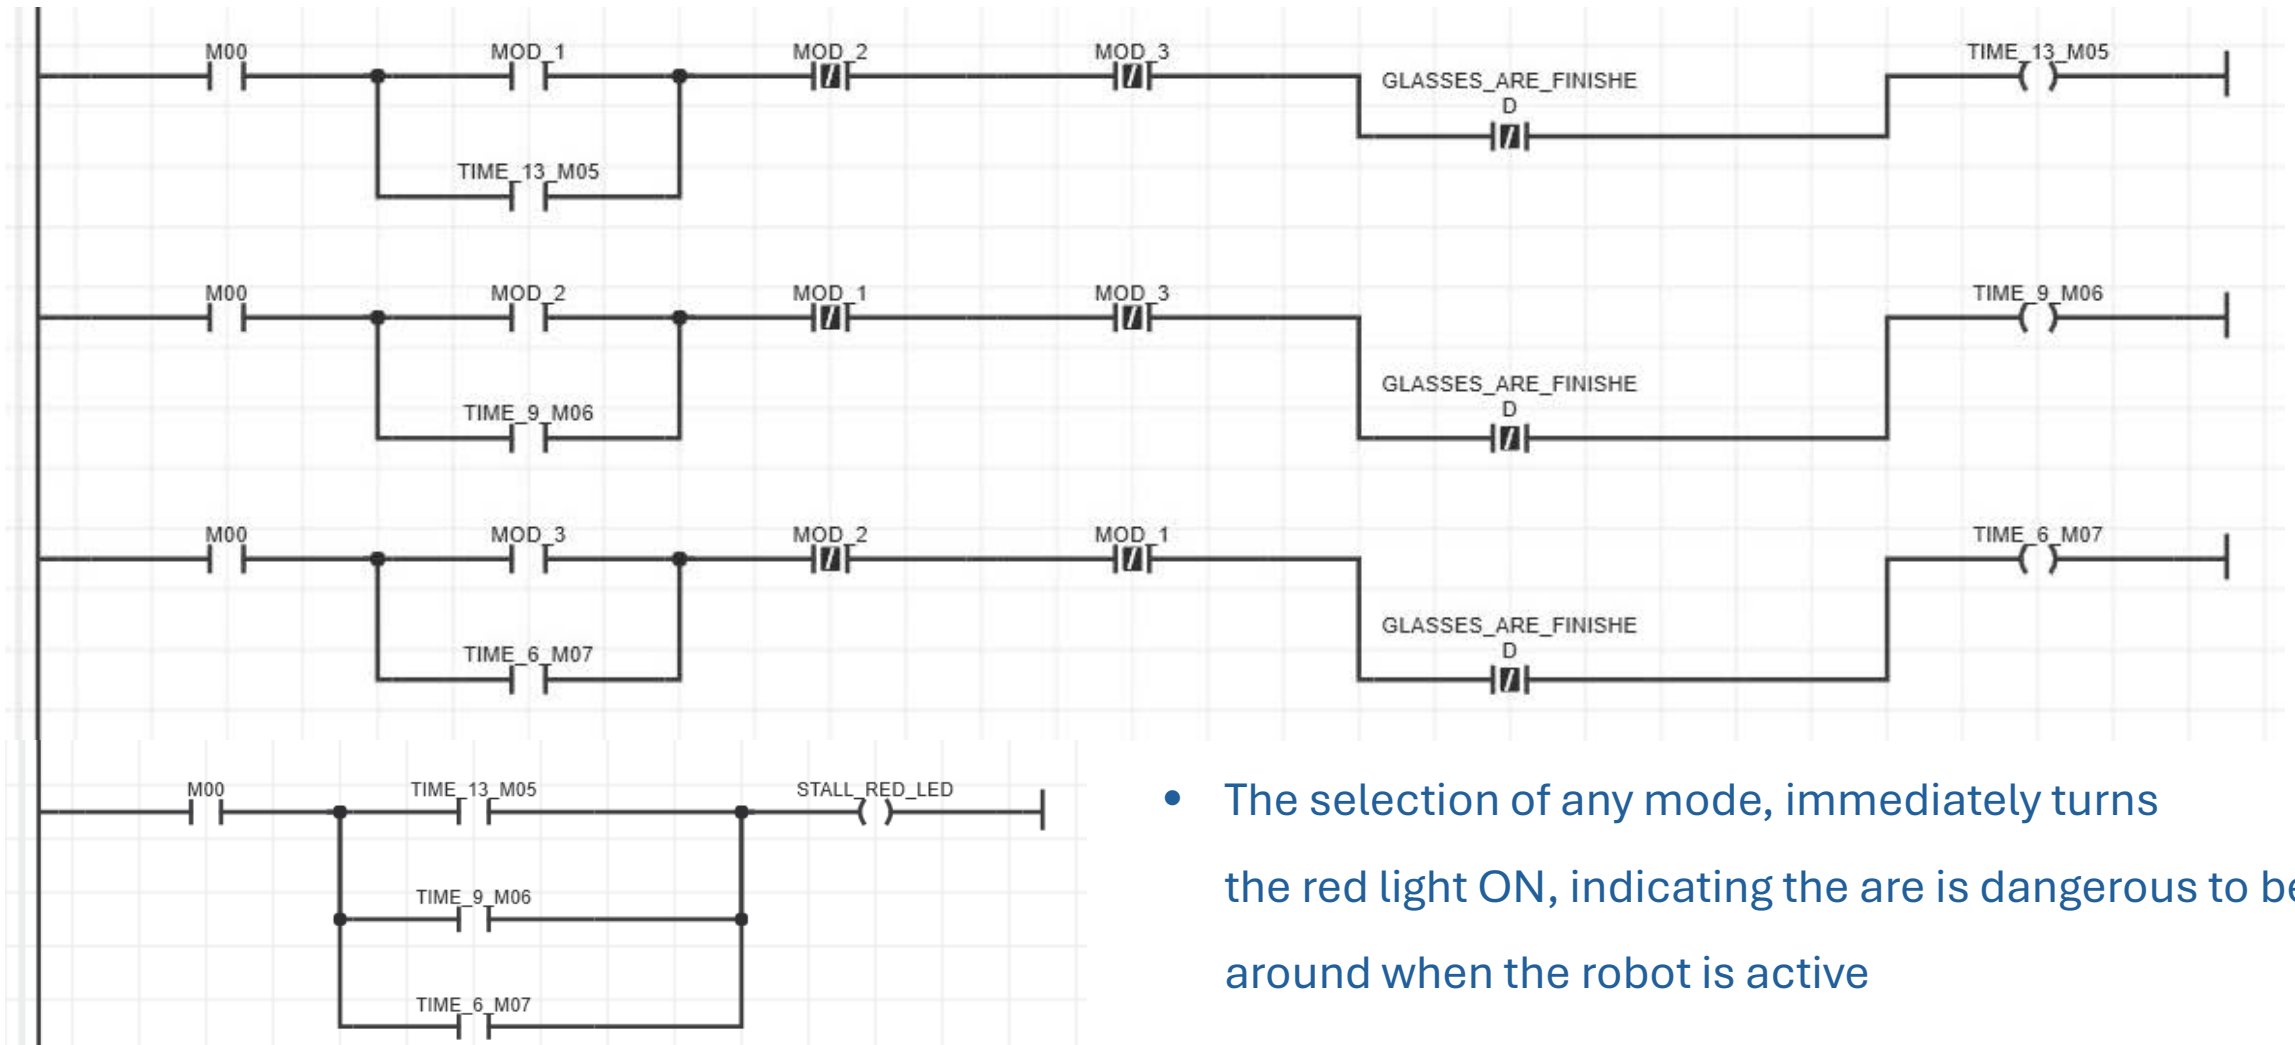


- The selection of any mode, immediately turns the red light ON, indicating the area is dangerous to be around when the robot is active


- Say, slow mode has been selected (TIME_13)
- It is represented here by the On Delay Timer TON1, taking it T#13sec to take a glass from a glass stall and place it on the conveyor before it
- TON2 with output T38 allows the robotic arm to place it gently in a span of T#2sec.
- The same case applies when the other modes are selected, but with their respective speed rate.

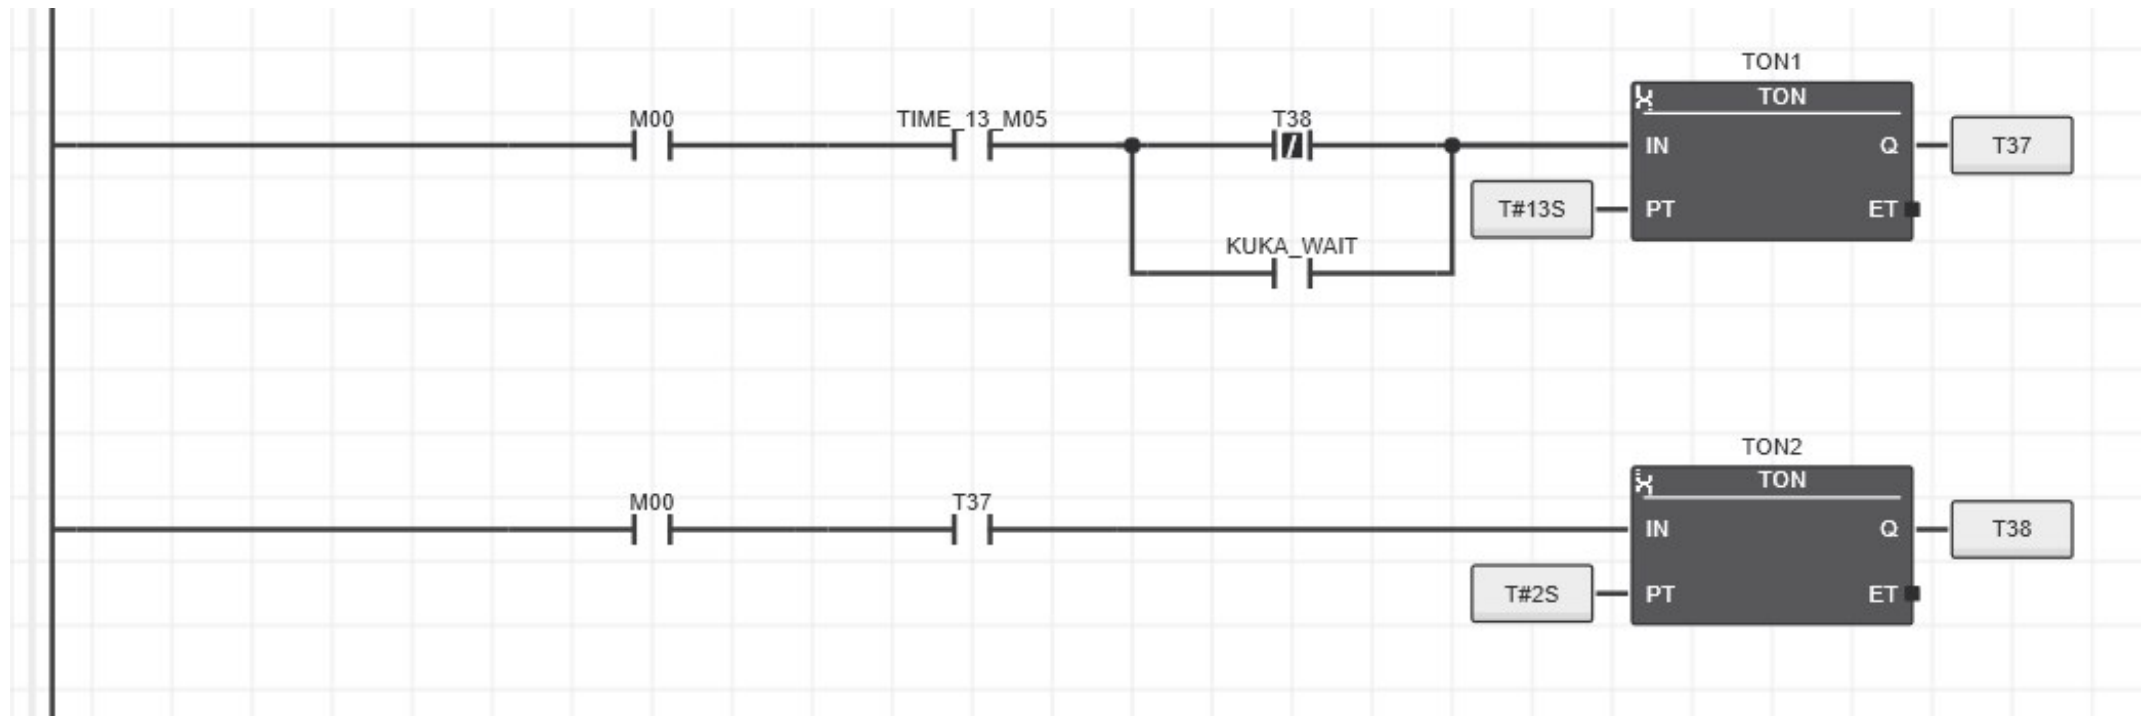


- Counters keep track of the amount of glass items taken from the glass tray
- As soon as an item is taken (T37 or others activated) R_TRIG enables counting
- Here the counter shown CTD1, counts glasses from the first slot C1, which holds 5 items
(for the purposes of this test)

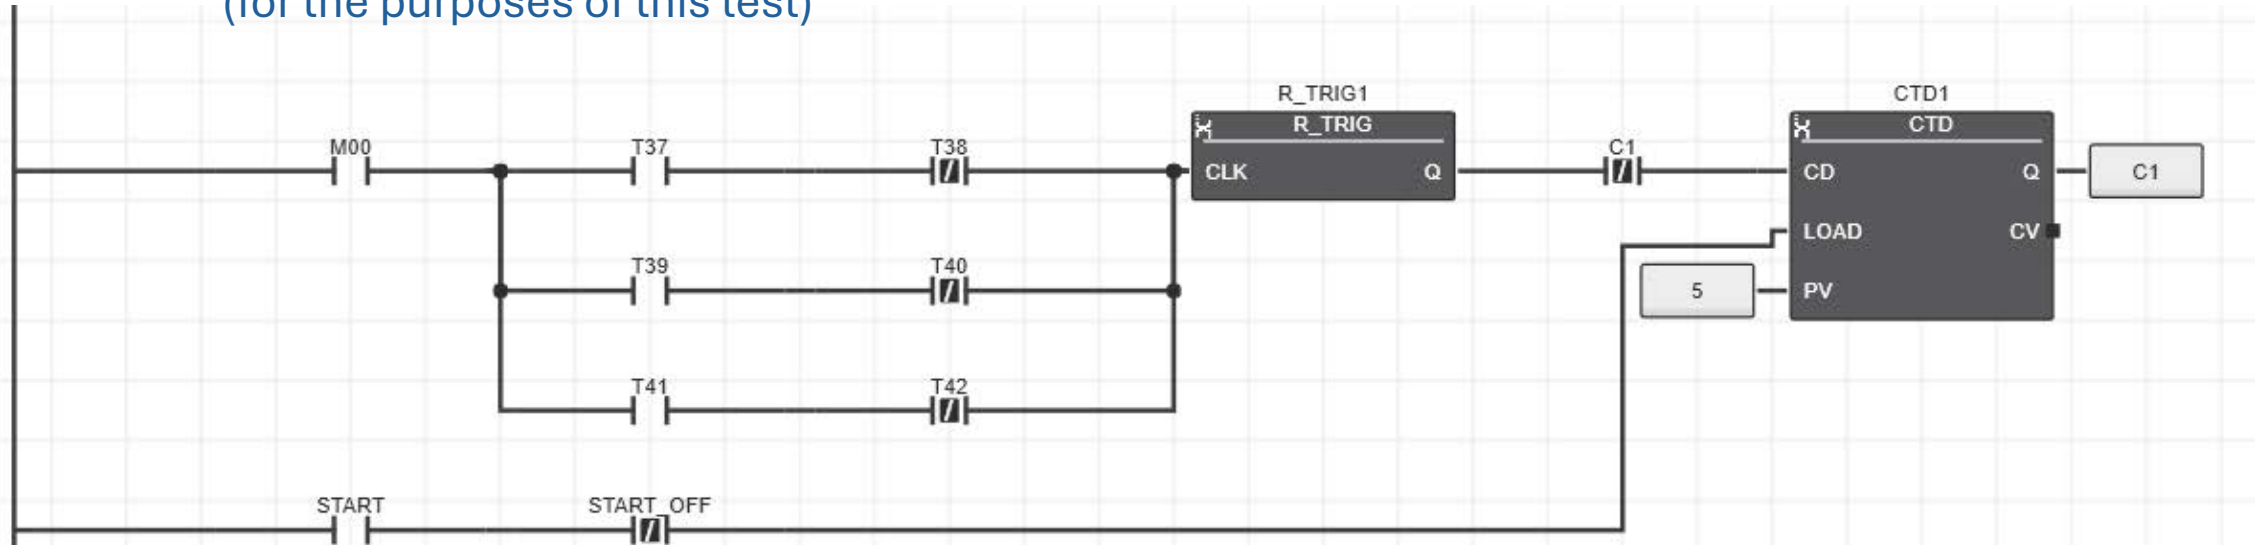


- START_OFF is enabled by default, which loads 5 items into the counter to count down from
- it gets disabled when all glasses are emptied

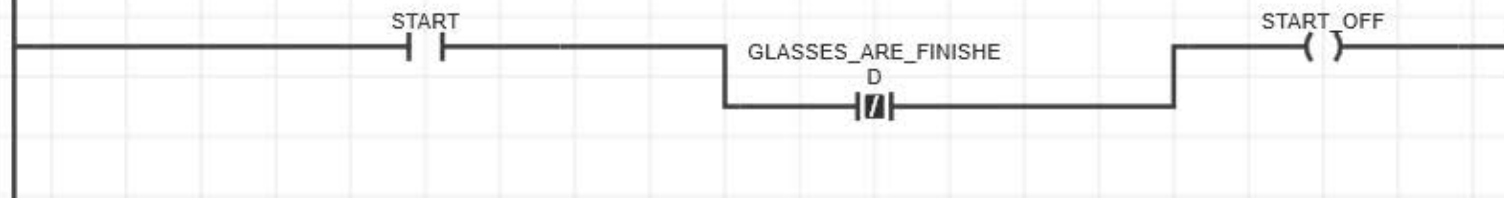

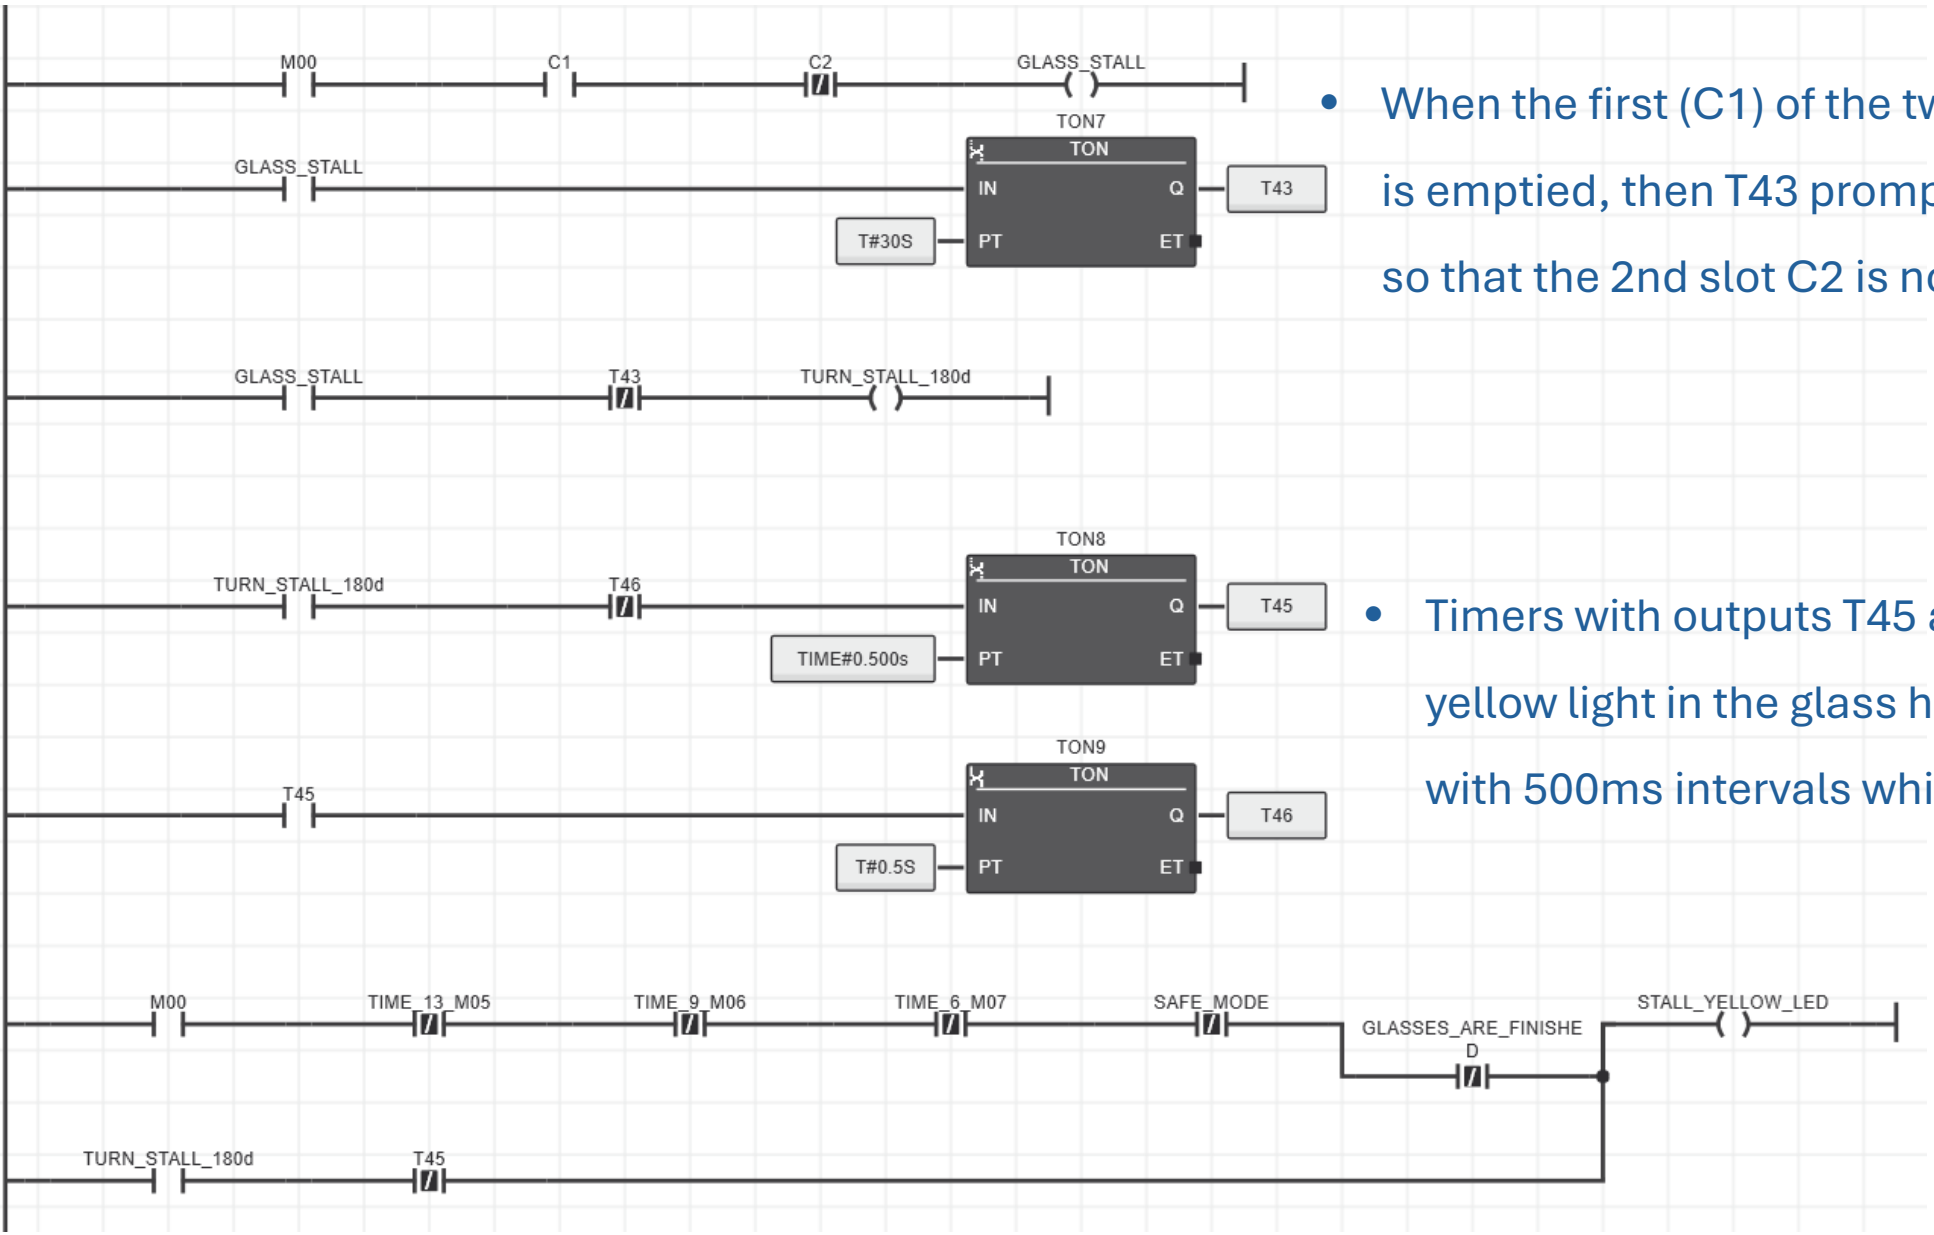

- When the first (C1) of the two slots in the first tray is emptied, then T43 prompts the stall to rotate so that the 2nd slot C2 is now facing the robot.


- Timers with outputs T45 and T46 enable yellow light in the glass handling section to flash with 500ms intervals while the stall is turning

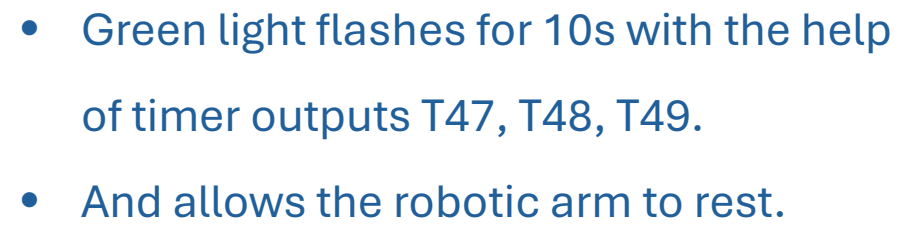


- Green light flashes for 10s with the help of timer outputs T47, T48, T49.
- And allows the robotic arm to rest.

Conveyor to Glass Processor

- Sensors S1 and S2 detect glass items in the rear end of the conveyor where they have been placed by the robot.
- Sensor S3 scans for glass jut before the glass processing machine

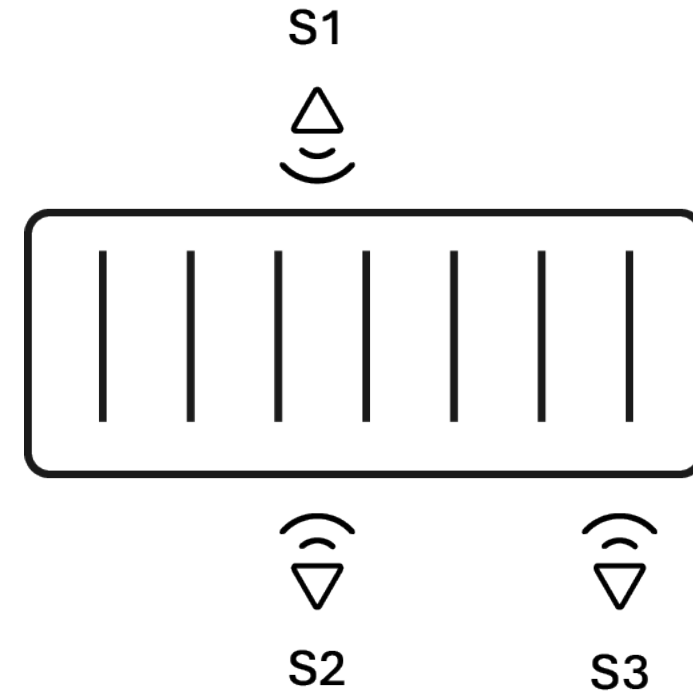


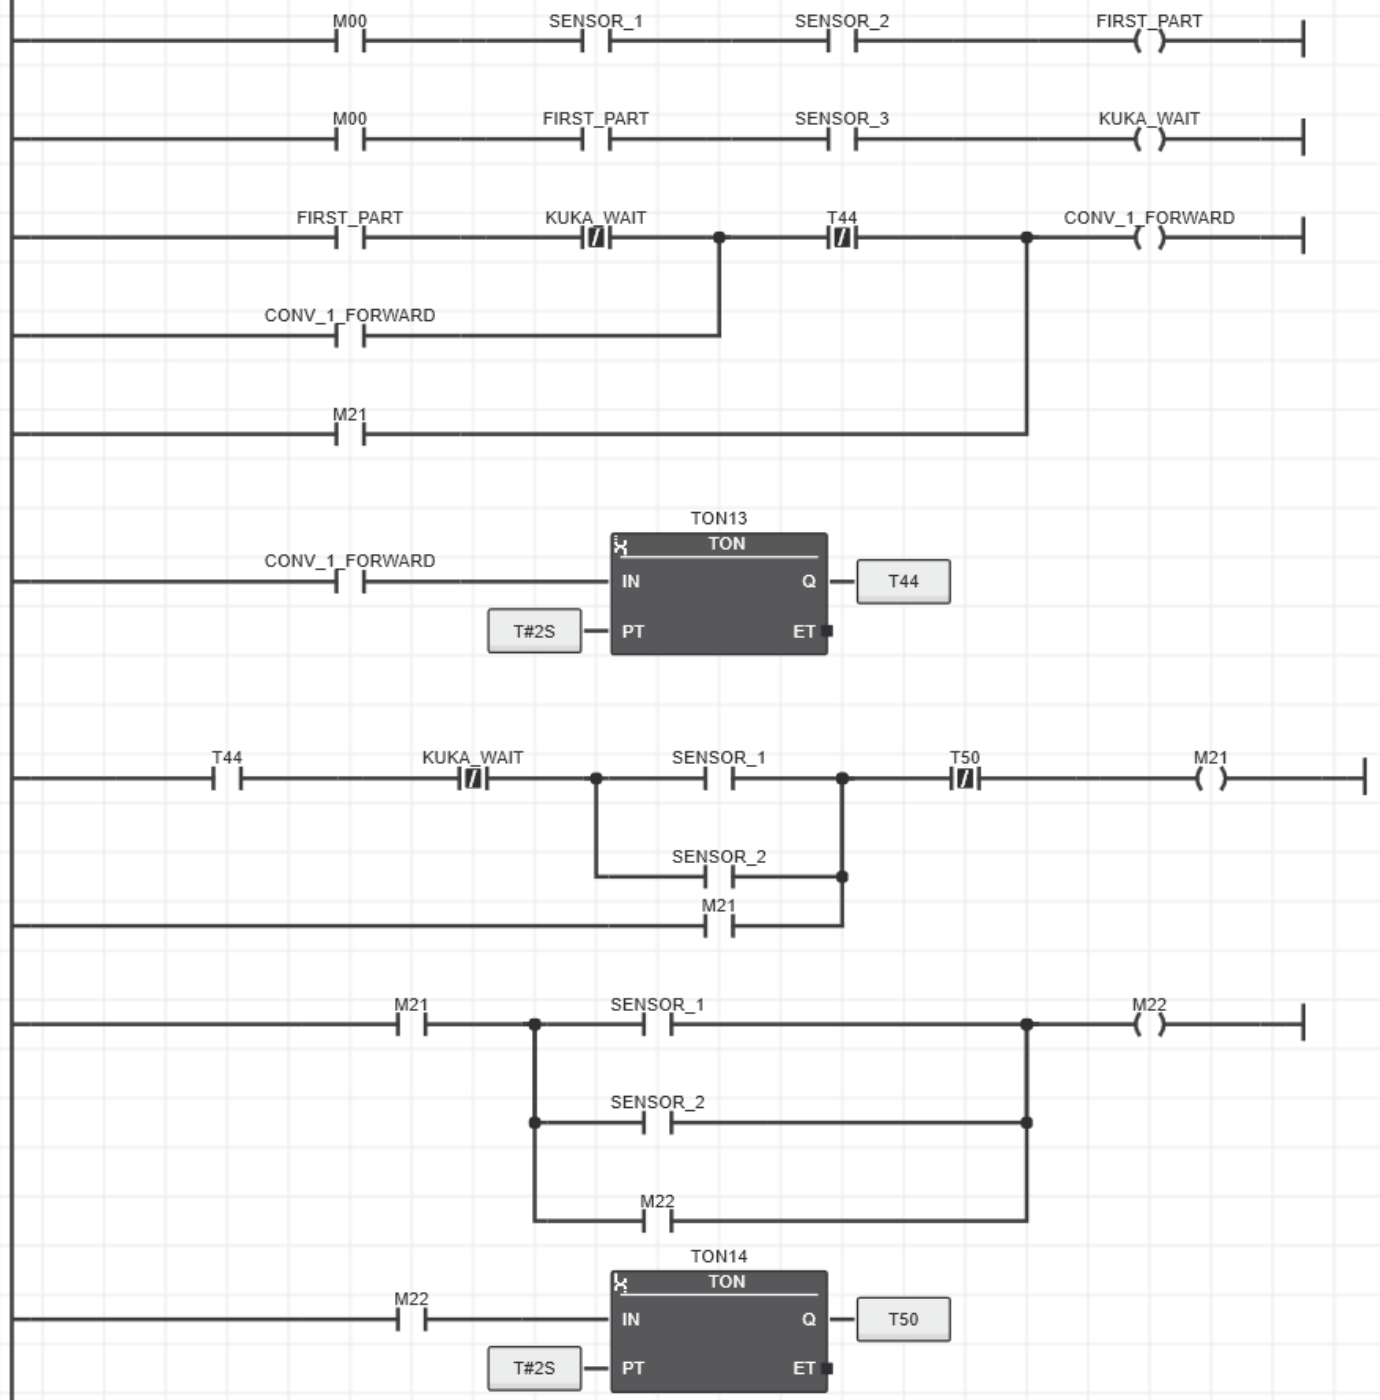


- When both the sensors, 1 and 2, detect glass, the conveyor is prompted to move forward (for 2s by T44) to clear space for the robotic arm to place more items
- If, in addition to glasses occupying the first area, the latter part also detects glass with the help of sensor 3, then KUKA_WAIT is enabled.


Glass Processing

- Bando Kiko is a Japanese company that develops glass processing machines.
- A typical glass processor handles three principal operations:
 - Glass material is cut/scored into the desired shape.
 - The excess unwanted parts are separated along the score lines, called 'Breaking Out'.
 - Glass edges are ground and polished for a smooth finish.
- A recycling bin has been added to hold the separated unwanted glass parts. Lights indicate how much it has been filled.

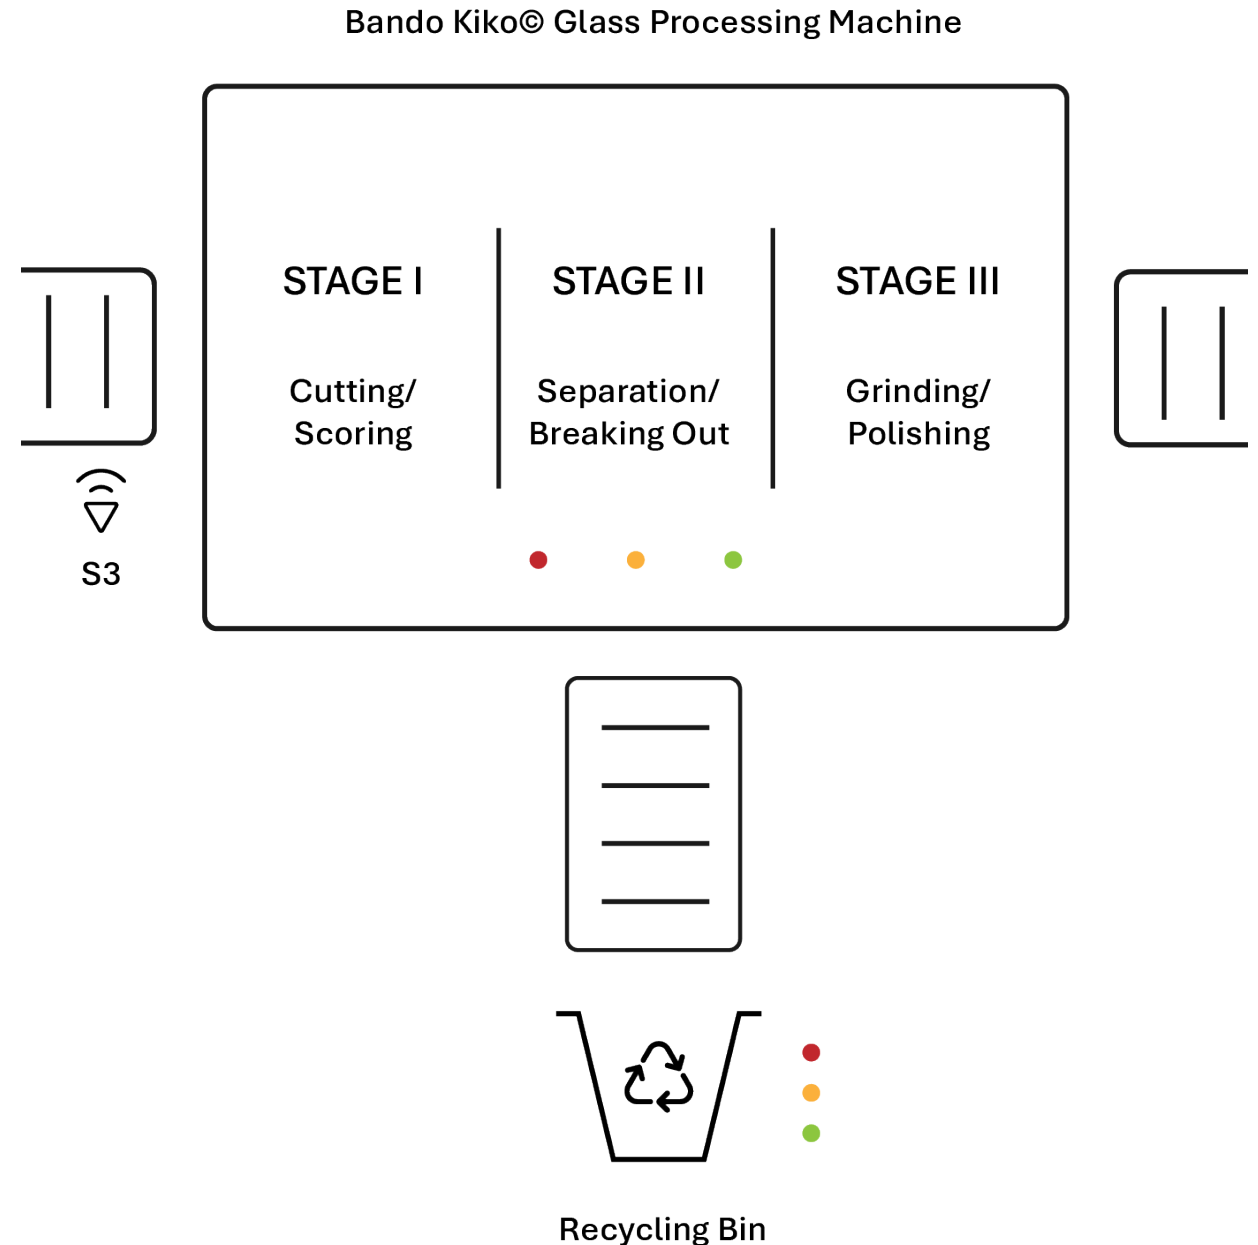

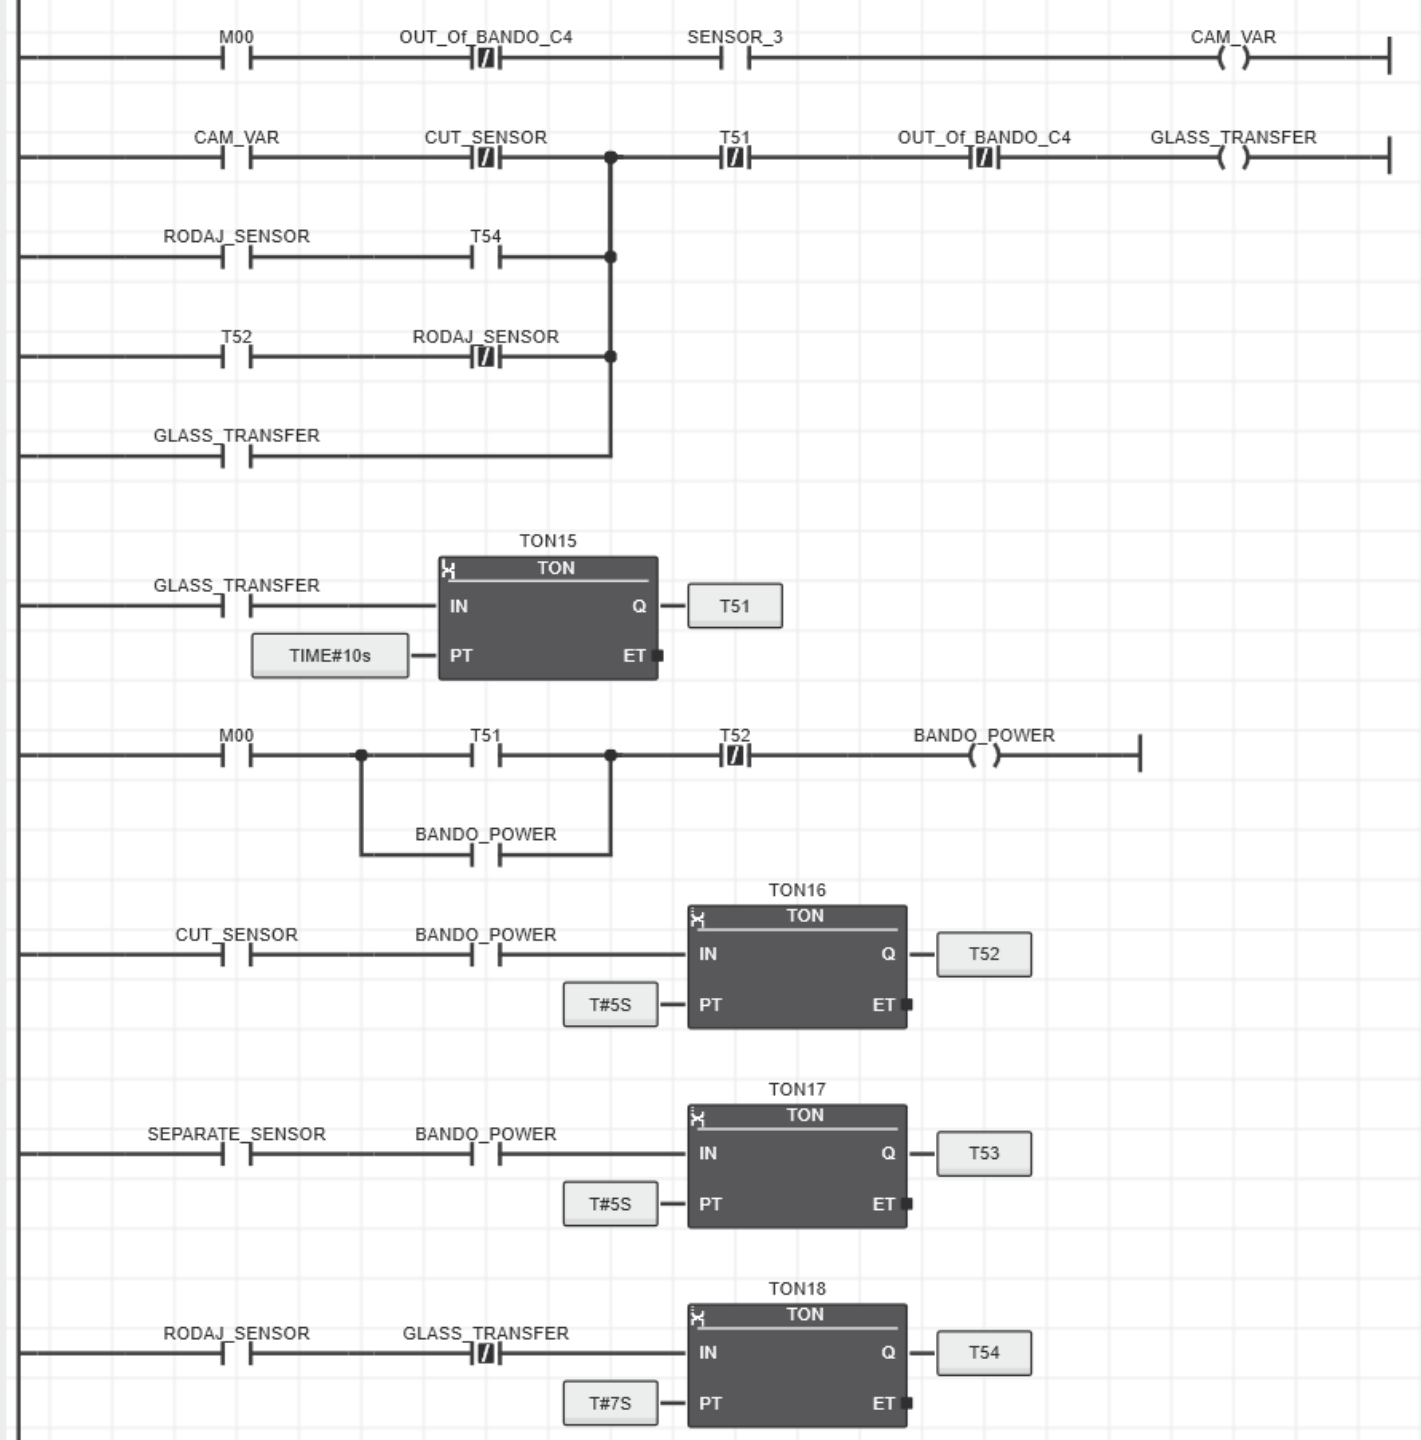


- Sensor 3 detects glass and turns on CAM_VAR, which activates GLASS_TRANSFER, facilitating the transfer of glass items into the processing machine
- The machine is then turned on (BANDO_POWER), which completes a batch in 10s (T51).
- Sensors at each stage, CUT, SEPARATE, and RODAJ, trigger the respective operations for certain amount of time.

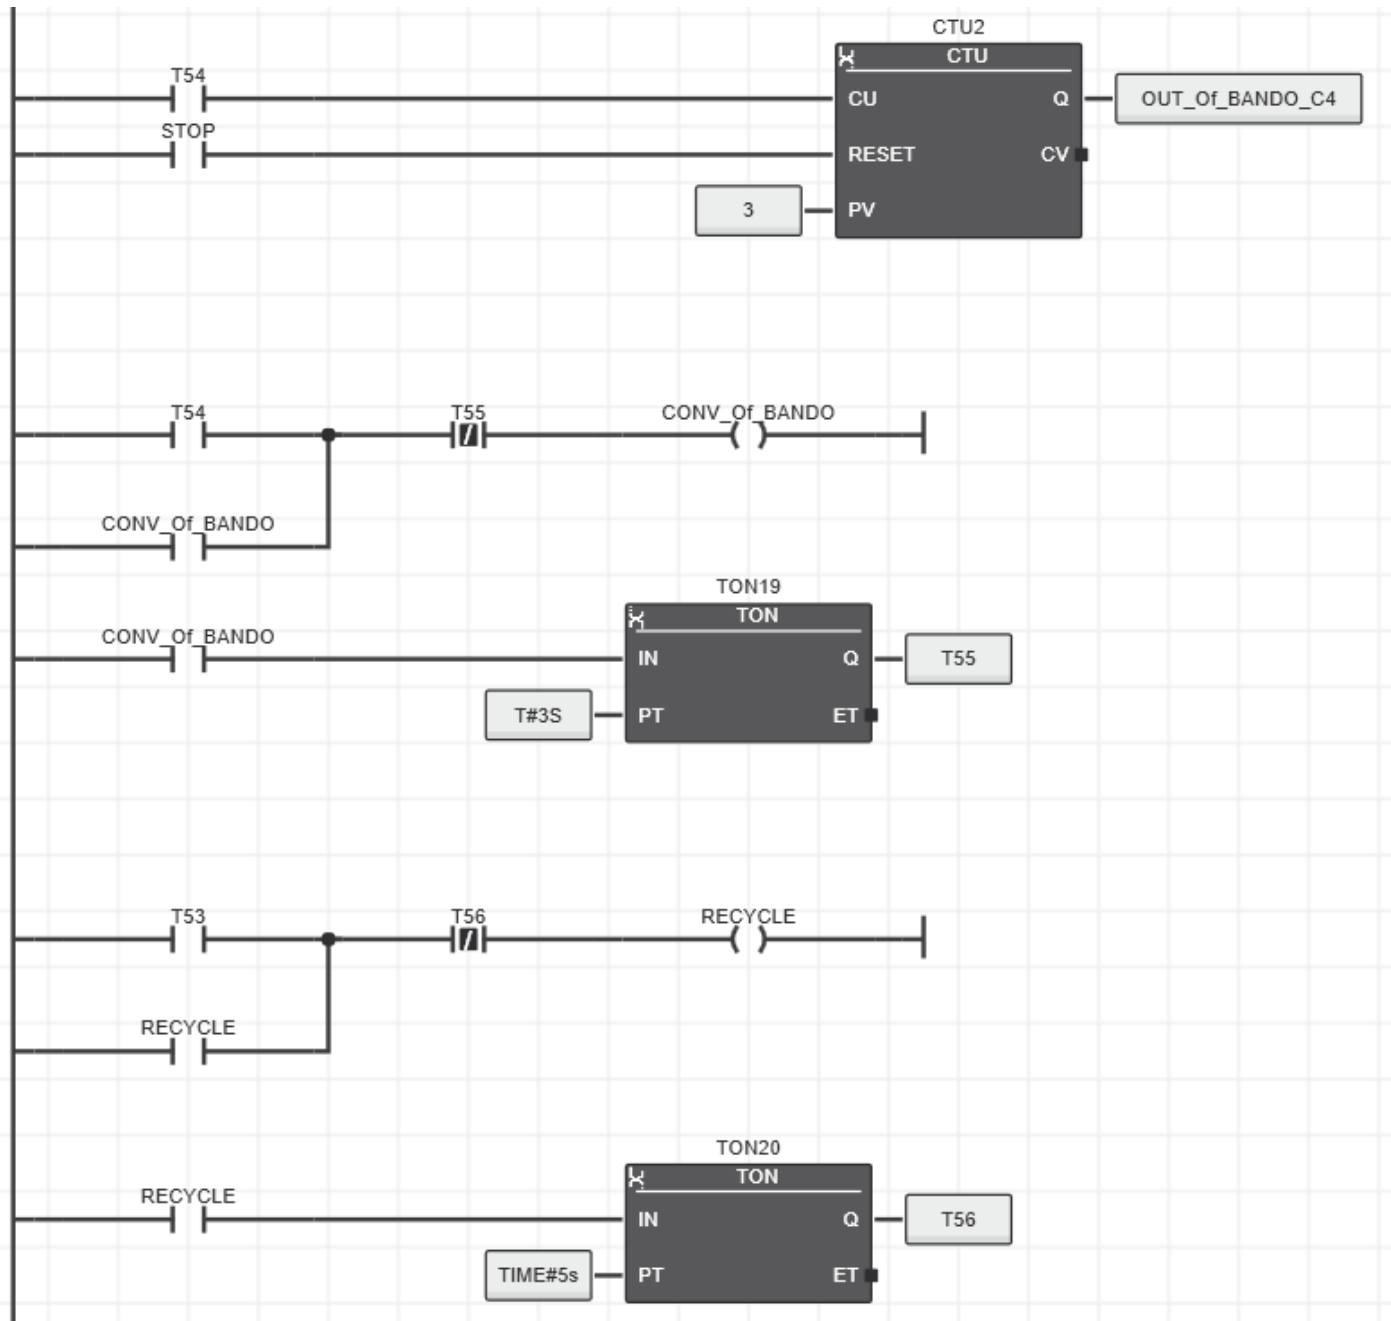


- When the final grinding operation is done (T54), items are ready to leave the machine, a counter (CTU2) counts maximum 3 items per batch before they're unloaded via CONV_Of_BANDO, which is latched for 3s (T55)
- On the other hand, when the process of glass separation is done (T53), RECYCLE is activated which discards the unwanted pieces during 5s (T56)

- The lights on the processing machine, mimic the lights on the glass tray section.
 - Red indicates that the machine is active
 - Yellow indicates work being done
 - Green shows the current batch has been processed

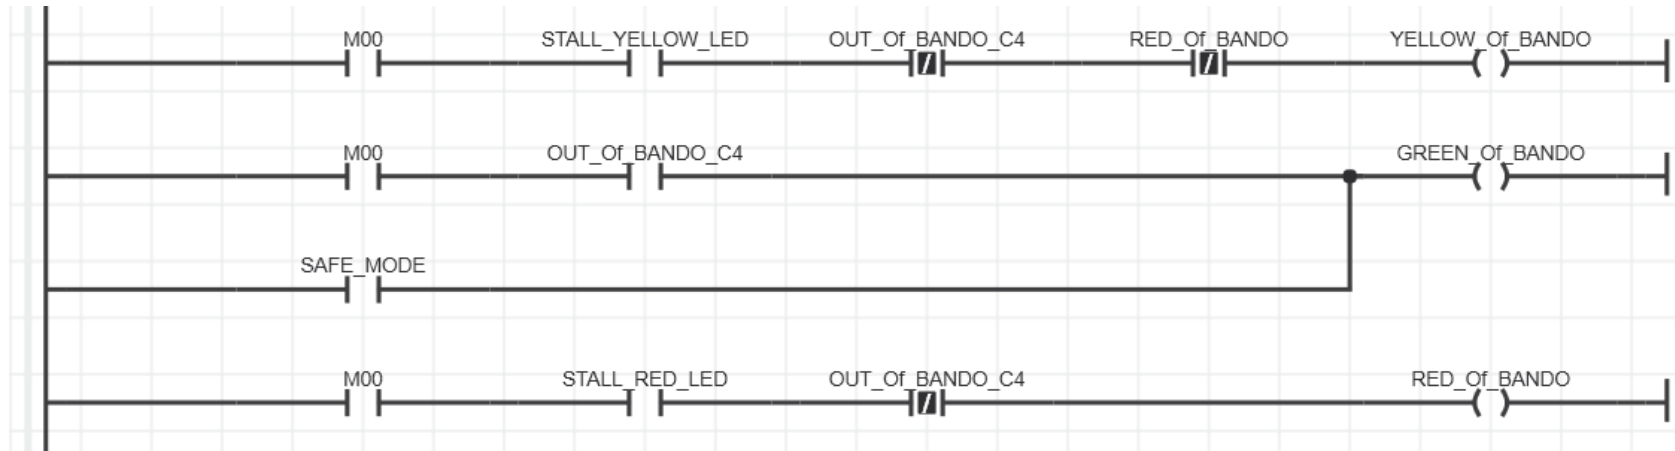



- The recycling bin has three lights of green, yellow and red on it, each of which activated by weight sensors indicate how full it has gotten, and thus suggesting the urgency of the bin to get emptied.

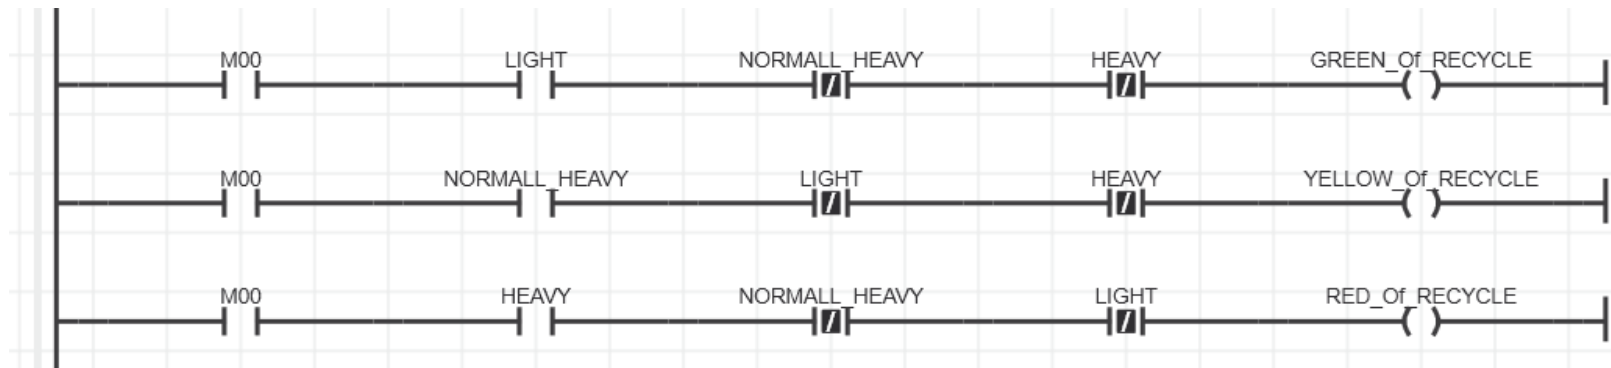

Final steps following processing


- Right after the glasses have been processed, a conveyor transfers them to a cleaning cabin to wash off all the residue.
- The conveyor slows down to facilitate gentle transfer
- Afterwards the final conveyor presents the completely processed glass ready to be taken.
- With the help of a sensor and some lights and a siren, urgency is indicated

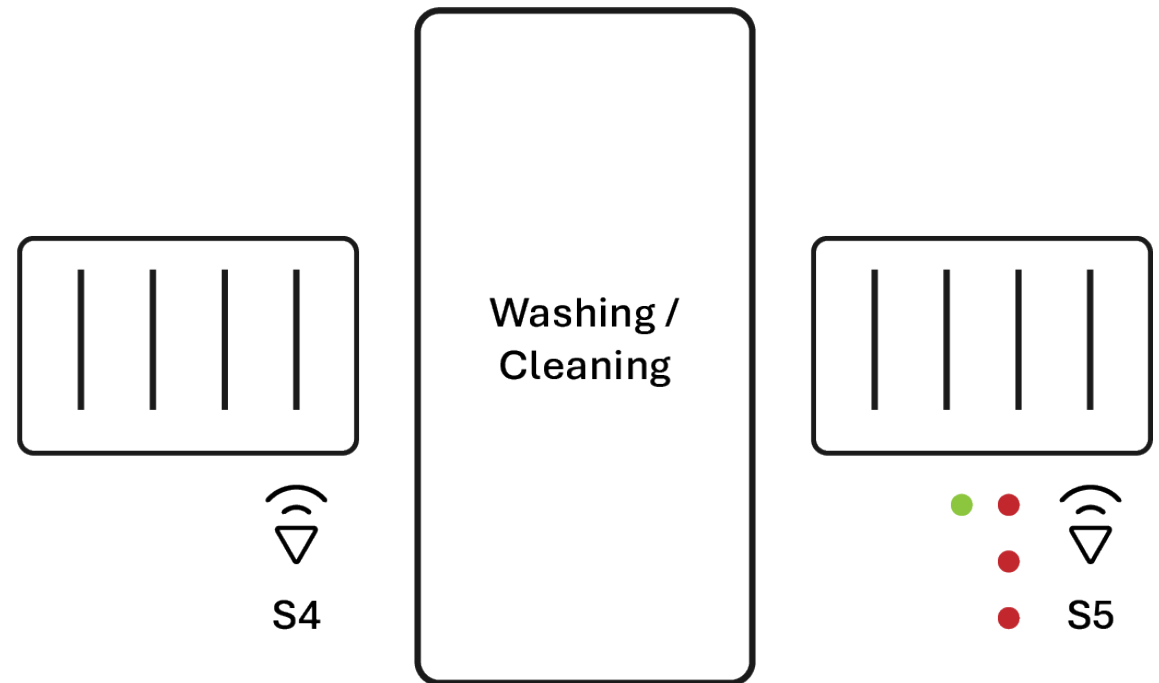


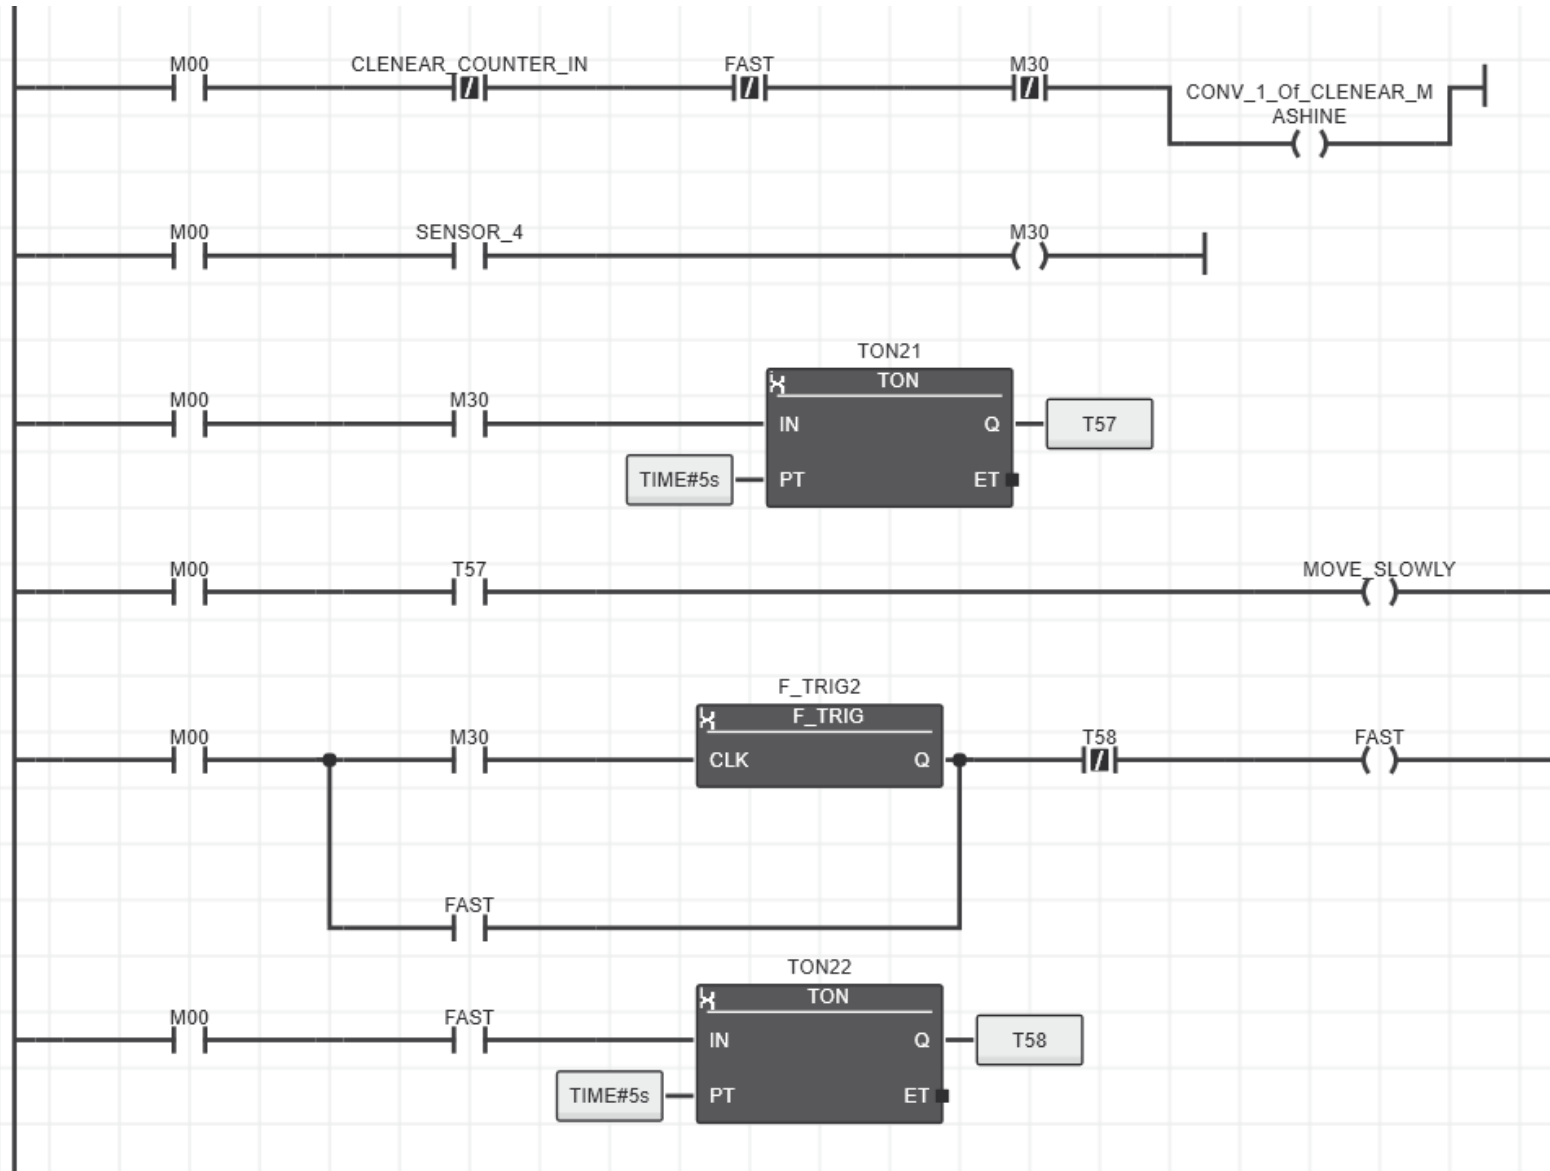


- By default, the conveyor right after the processing machine moves fast to keep up with the machine
- But when sensor 4 right before the cleaning section detects a glass, the conveyor is commanded to move slowly so as to drop them in gently, within 5s (T57).
- Conveyor defaults to fast motion as soon as (F_TRIG2) sensor stops detecting any glass (M30)

- Sensor 4 also serves to keep track of the number of glass items sent to be cleaned and those that are in wait.
- At any moment 5 items inside the cleaner is the limit. When there are more inside than outside, then caution is advised by 3 lights turned in succession for 1s each.

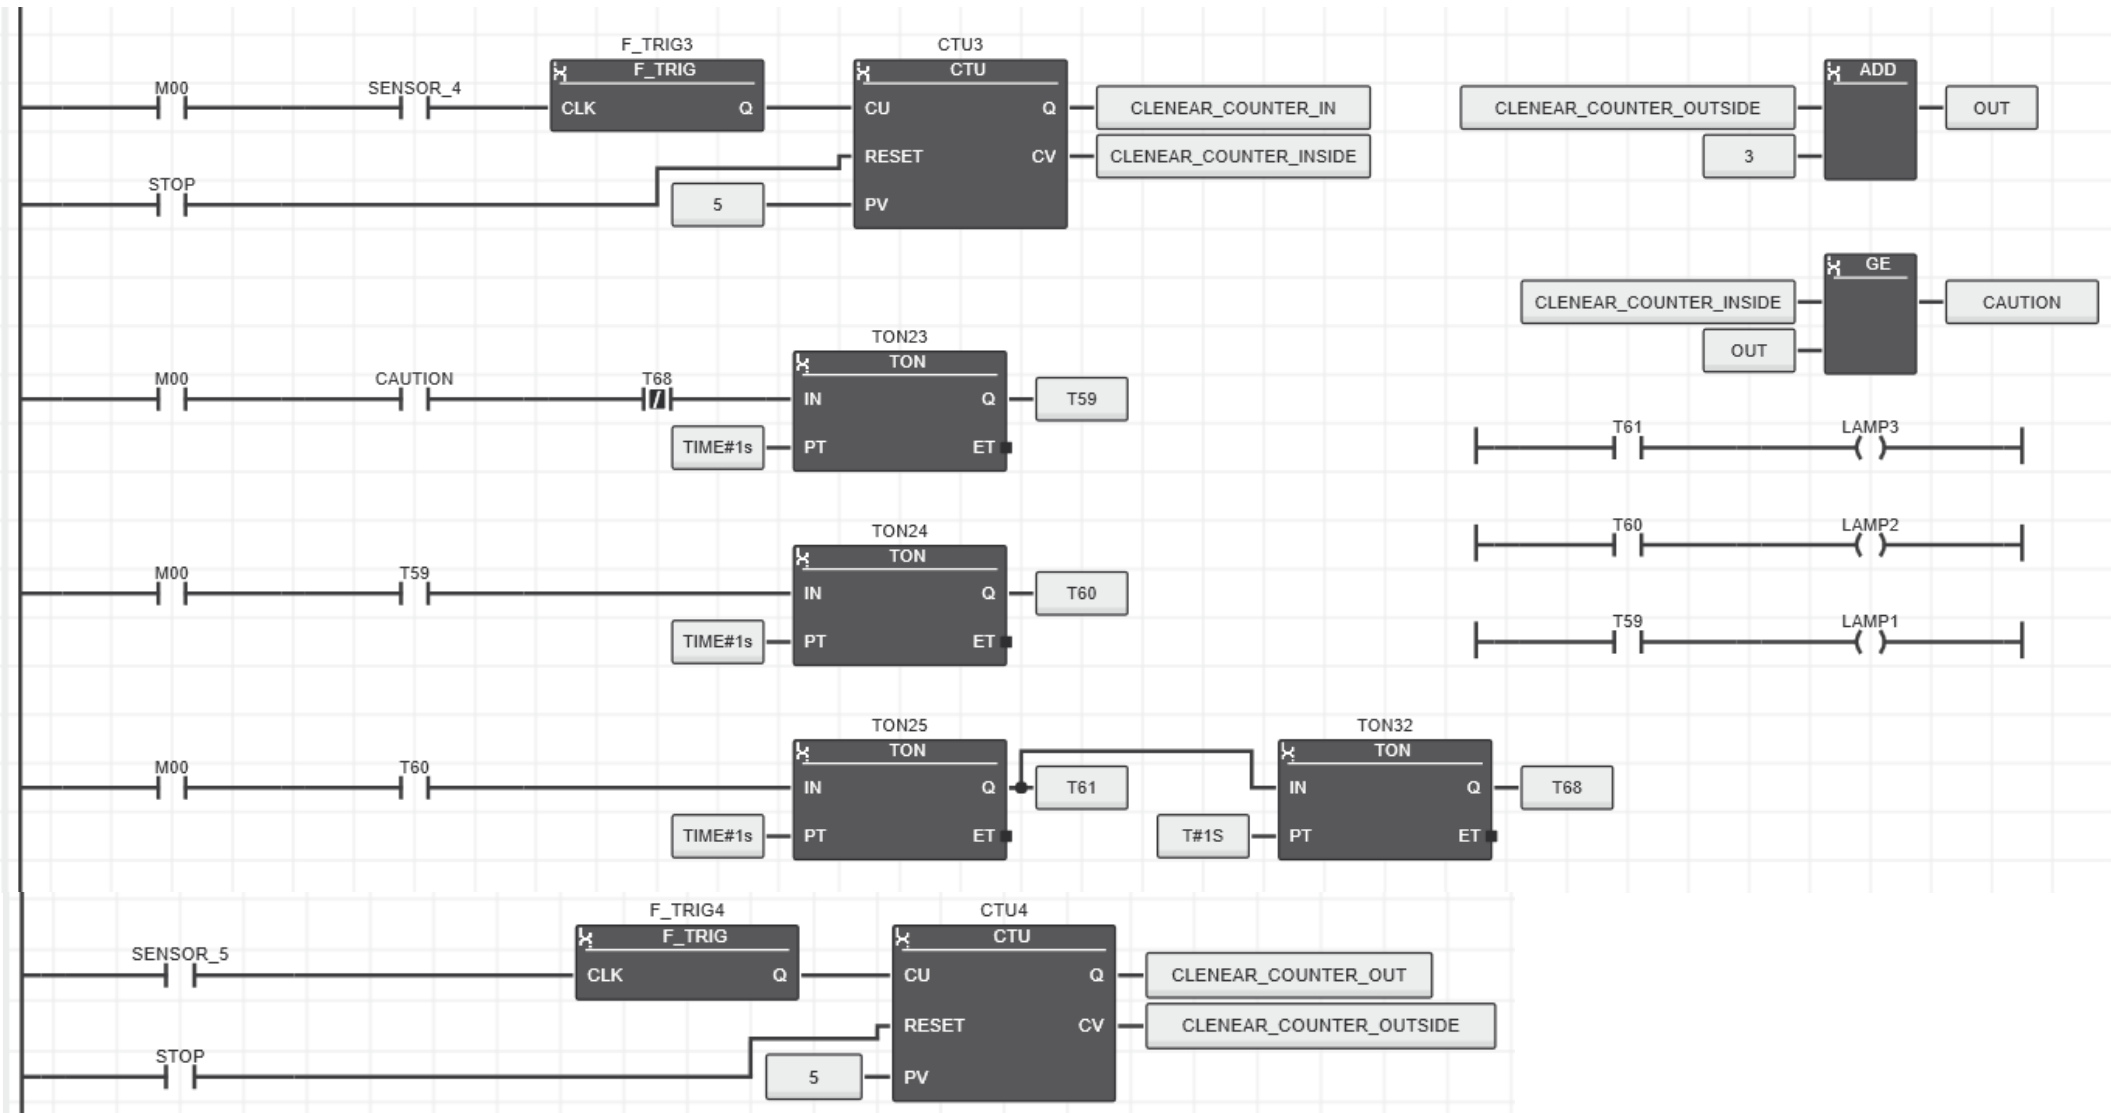

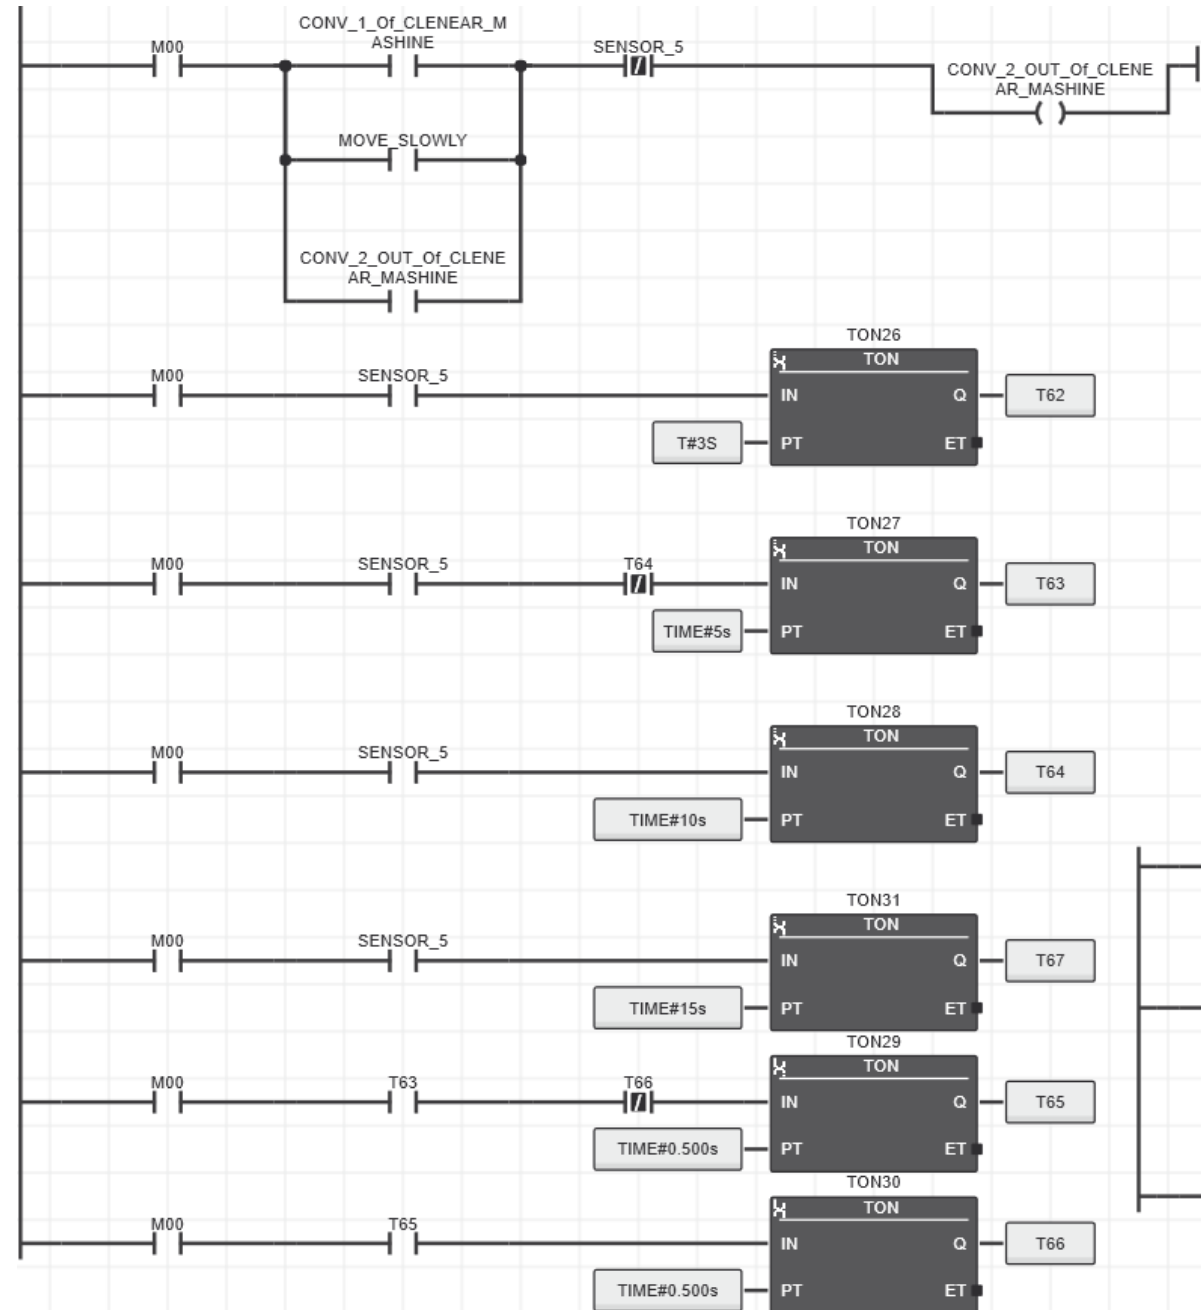

- Conveyor taking items into the cleaning machine also enables the conveyor taking them out, until sensor 5 located at the end of the conveyor detects glasses and to prevent them from falling down prompts the completely processed glasses to be taken away.
- When sensor 5 detects glass:
 - For 3 seconds (T62) green light is turned on.
 - After 5s (T63), green light starts flashing.
 - After 10s (T64), red light turns on and a siren is sounded

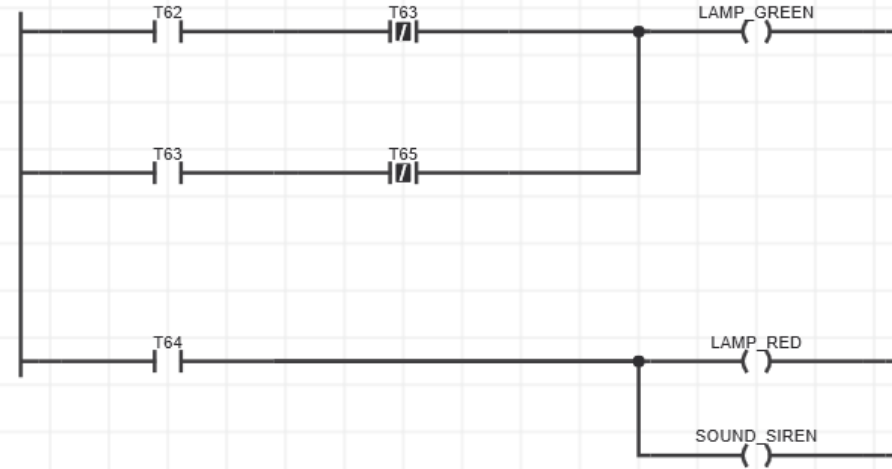


Human Machine Interface (HMI)

- The HMI module consists of 5 separate pages each representing the sections discussed above
- The main page begins the whole process




Human Machine Interface (HMI)

- Glass Handling Page

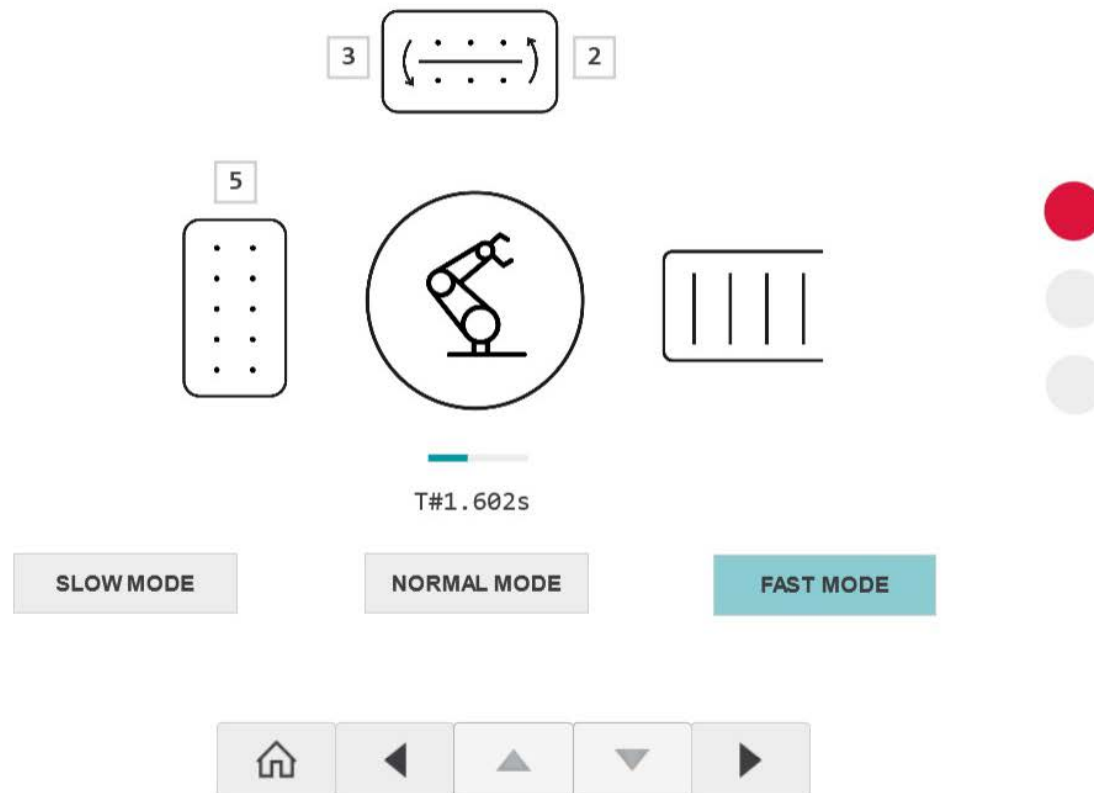


Human Machine Interface (HMI)

- Transferring glass items to glass processor

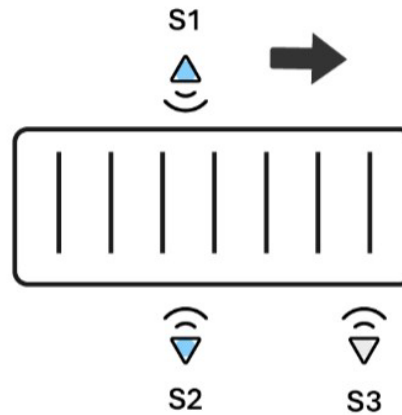


Human Machine Interface (HMI)

- Glass Processor

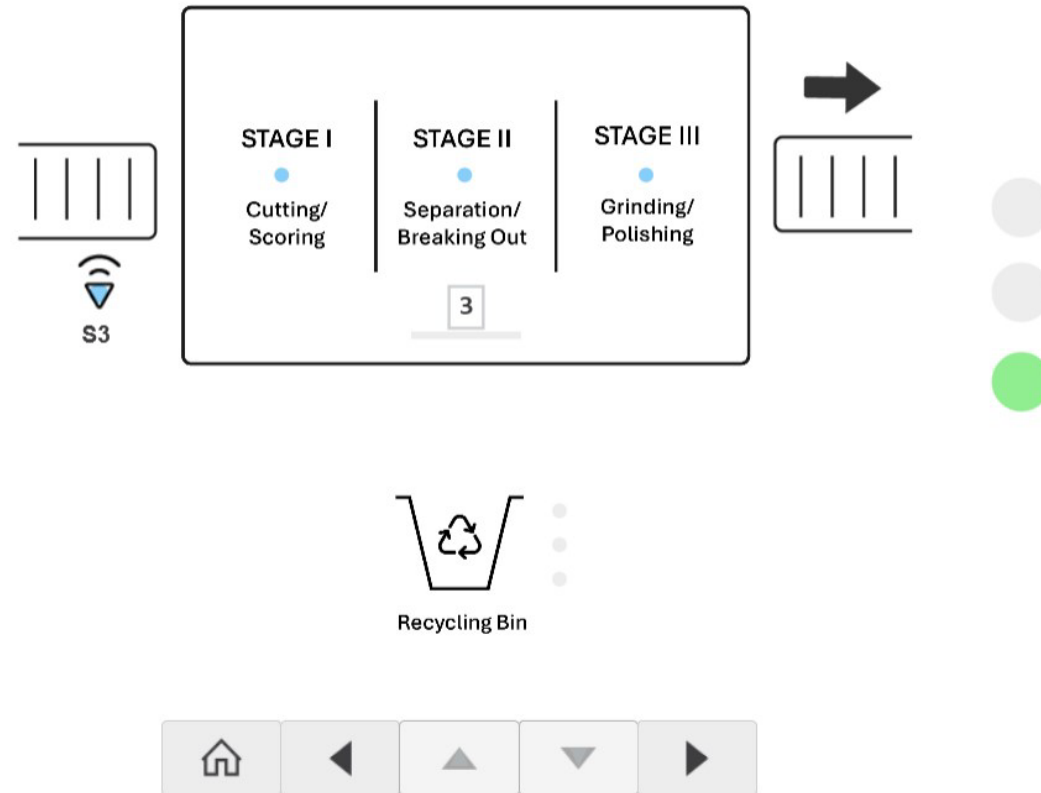

Human Machine Interface (HMI)

- Glass Cleaning

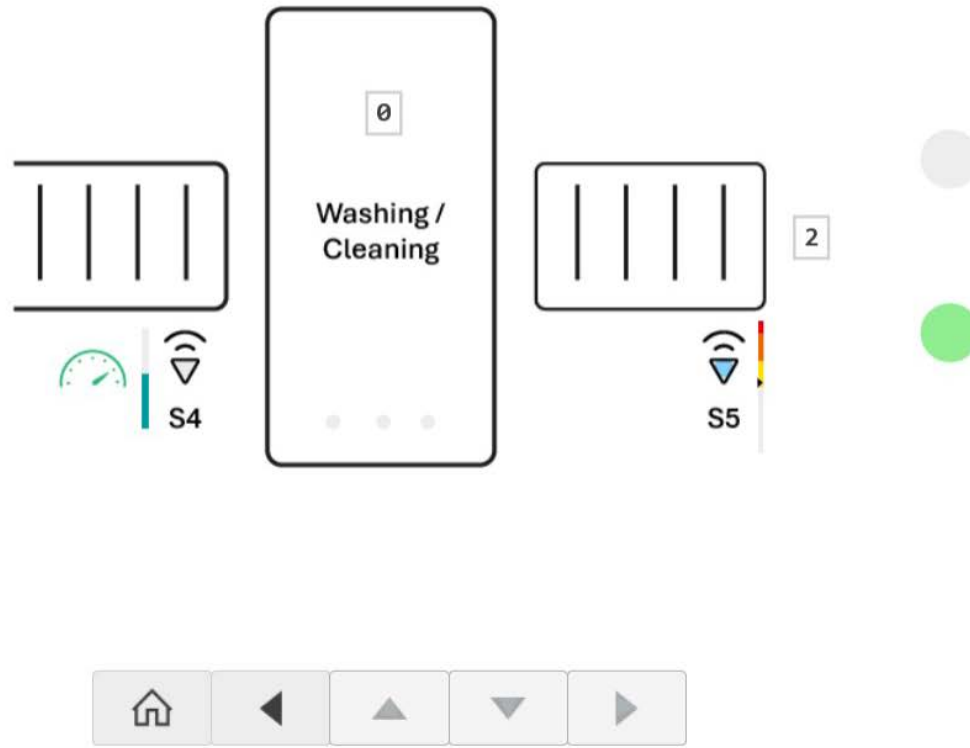

Thank You!

All files available at the repository:

<https://github.com/az-yugen/EEE-3506-PLC-Project>