


SYSTEM CABLES



M E S C
SPECIALIZED CABLES

FIRE ALARM SYSTEM

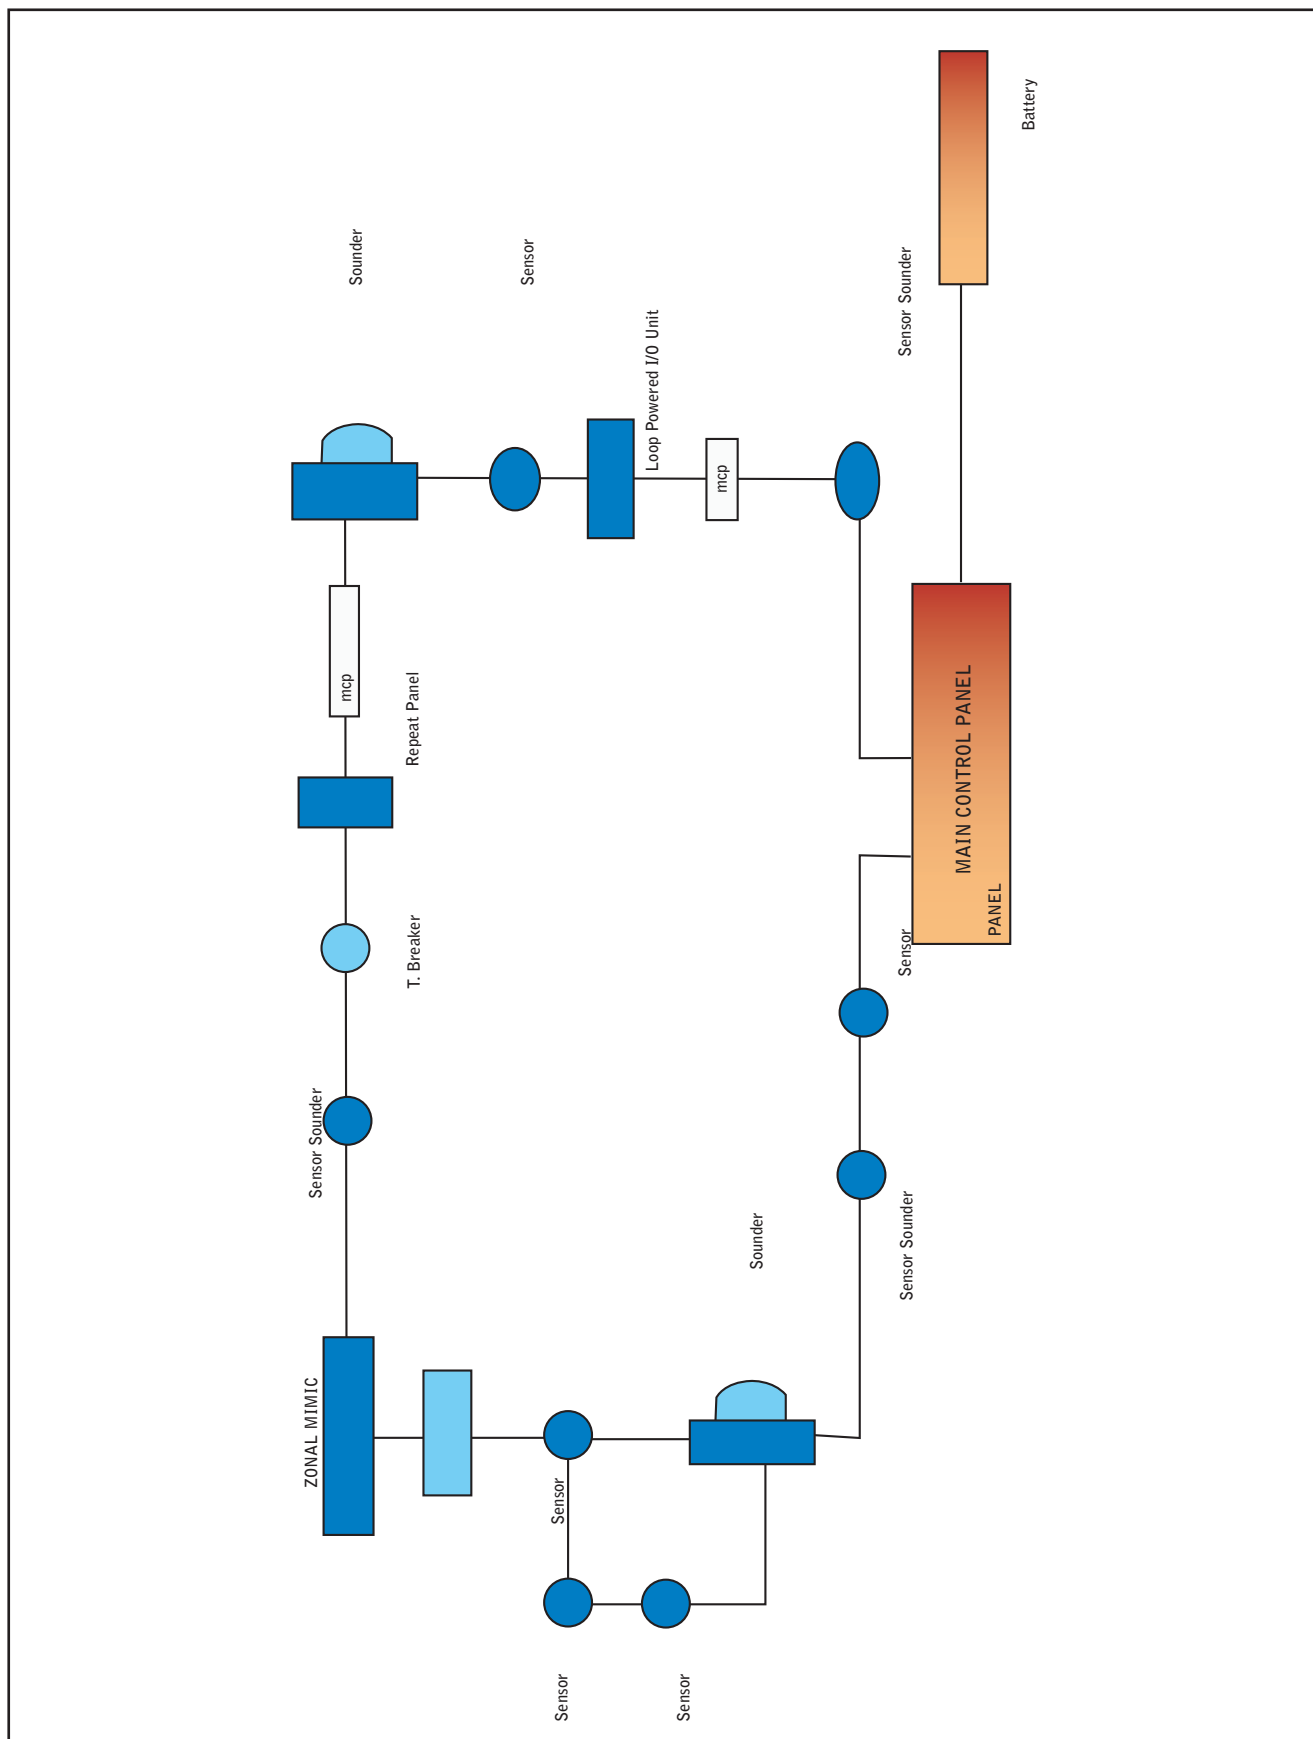

FIRE ALARM SYSTEM

FIRE ALARM CABLES (SHIELDED & UNSHIELDED) 105°C (UL 1424) POWER LIMITED FIRE PROTECTIVE SIGNALLING CIRCUIT CABLES 300 V

	FIRE ALARM CABLE (UL) FPLR MESC 2005

Application : Can be used as a fixed wiring within buildings in accordance with NEC Article 760 Power limited circuits. Also suitable as a power limited circuit cable in accordance with NEC Article 725 class 2 or 3 circuits.

Construction

- Conductor : Solid Annealed Copper Conductor as per ASTM B 3.
- Insulation : Extruded Solid PVC rated 105°C.
- Assembly : Colour coded insulated cores cabled. When the assembly is shielded an Aluminium Mylar Tape is used with a stranded tinned copper drain wire in contact with Aluminium part of the screen.
- Jacket : Red Coloured PVC jacketed passes the IEEE- 383 Flame Test.

COLOUR CODE

No. of Conductors	Colour	No. of Conductors	Colour
1	Black	4	Blue
2	Red	5	Brown
3	Yellow	6	Orange

UNSHIELDED CABLES

Order No.	MESC CODE	Size AWG	CORES NO.	Strands X diameter No. X mm	Insulation thickness mm	Sheath thickness mm	Approx. O. D. mm	Approx. Weight Kg / Km	Packing
41001	4111-02C18AWG-U ORD6-00	18	2	1 x 1.02	0.38	0.89	5.7	42	C,6
41002	4111-02C16AWG-U ORD6-00	16	2	1 x 1.29	0.38	0.89	6.2	55	C,6
41003	4111-02C14AWG-U ORD6-00	14	2	1 x 1.63	0.51	1.01	7.7	84	8,6
41004	4111-02C12AWG-U ORD6-00	12	2	1 x 2.05	0.51	1.01	8.6	113	8,6

SHIELDED CABLES

Order No.	MESC CODE	Size AWG	CORES NO.	Strands X diameter No. X mm	Insulation thickness mm	Sheath thickness mm	Approx. O. D. mm	Approx. Weight Kg / Km	Packing
42001	4211-02C18AWG-U ORD6-00	18	2	1 x 1.02	0.38	0.89	6.1	53	C,6
42002	4211-02C16AWG-U ORD6-00	16	2	1 x 1.29	0.38	0.89	6.6	66	C,6
42003	4211-02C14AWG-U ORD6-00	14	2	1 x 1.63	0.51	1.01	8.1	106	8,6
42004	4211-02C12AWG-U ORD6-00	12	2	1 x 2.05	0.51	1.01	9.0	136	8,6
42005	4211-04C18AWG-U ORD6-00	18	4	1 x 1.02	0.38	0.89	6.8	78	8,6
42006	4211-04C16AWG-U ORD6-00	16	4	1 x 1.29	0.38	0.89	7.7	107	8,6
42007	4211-04C14AWG-U ORD8-00	14	4	1 x 1.63	0.51	1.01	9.3	163	8
42008	4211-04C12AWG-U ORD8-00	12	4	1 x 2.05	0.51	1.01	10.8	233	8

Packing : 6 Ø 1000 ft Reel.
C Ø 1000 mtr Reel.
8 Ø 1000 mtr Drum.