

SPECIFICATIONS

FlowCon By-Pass Assembly¹


Static pressure:	2500 kPa / 360 psi
Media temperature:	-20°C to +120°C / -4°F to +248°F
Material:	
- Housings and cover:	Forged brass DZR ASTM CuZn36Pb2As (CW602N)
- O-rings:	EPDM
- By-Pass ball valves:	Chemically nickel-plated brass
- By-Pass handles, extended:	Painted aluminum
- Strainer mesh:	420μ (=40 mesh) stainless steel
- Drain valve:	Brass DZR ASTM CuZn36Pb2As (CW602N)
- Drain ball valve:	Chemically nickel-plated brass
- Drain valve handle:	Painted aluminum
- Insulation:	EPP
End connection:	Female ISO
Housing taps:	1/4" ISO

Note 1: Assembly comes complete and fully pressure tested.

PRINCIPLE OF OPERATION

NORMAL OPERATION:

During **normal operation** the bypass is closed (both handles are positioned parallel with water flow), and water will flow through the strainer, into the FCU and return through the PICV valve. During this operation the PICV will balance the flow from closed valve to design flow depending on actual requirements and corresponding actuator position.

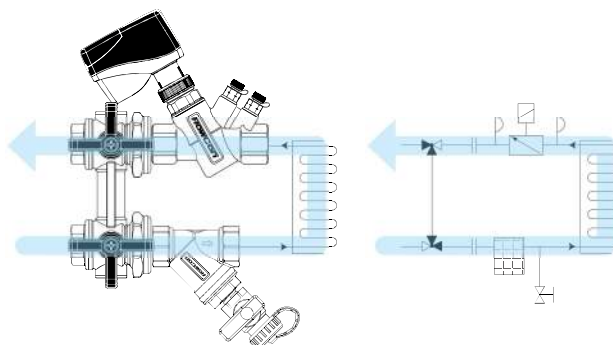


BYPASS OPERATION:

Option 1.

During **bypass operation** the FCU is isolated from the system. The FCU may, after draining, easily be serviced while the main system is running unaffectedly.

It will also be in bypass operation that the main system is flushed without compromising FCU components.

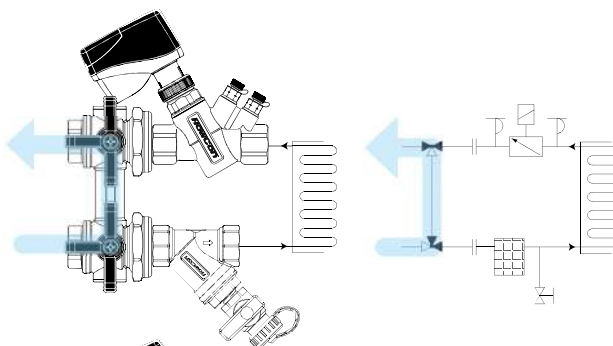

Option 2.

In addition, complete isolation of the FCU is possible providing closed bypass and isolated flow- and return-side.

