

PIPES DN 40 - 600

FEATURES

For STEEL,DI,UPVC,CI,and AC pipes or almost any other rigid pipe material.In the form of wide range (Up to 23mm) couplings,are designed to join pipes of various outside diameters with the same or different nominal bore.The ability of universal coupling to join dissimilar pipe materials is a bonus feature in both repair or permanent situations.

PN16 operating pressure.


MATERIAL

END RING : DUCTILE IRON GGG-40
BODY : CARBON STEEL / DUCTILE IRON

GASKET : EPDM / NBR / SBR

BOLTS & NUTS : CARBON STEEL

COATING : EPOXY coating.

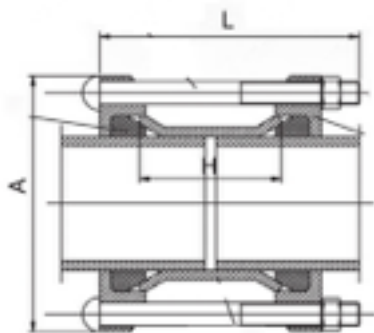

SIZE	OD RANGE	A	L	BOLTS	
				L	Qty
DN40	48-60	165	100	M12*180	2
DN50	59-72	180	95	M12*180	2
DN65	72-85	180	95	M12*180	3
DN80	88-103	190	95	M12*180	4
DN100	105-122	214	95	M12*180	4
DN100	109-128	214	95	M12*180	4
DN125	125-140	250	100	M12*180	4
DN125	132-146	250	100	M12*180	4
DN125	138-153	250	95	M12*180	4
DN150	155-175	278	105	M12*200	4
DN150	159-182	278	105	M12*200	4
DN175	192-210	300	130	M12*220	4
DN200	218-235	324	130	M12*220	4
DN225	230-247	357	130	M12*230	6
DN225	250-267	406	130	M12*230	6
DN250	265-280	406	130	M12*230	6
DN250	272-289	406	130	M12*230	6
DN300	315-332	440	130	M12*230	6
DN300	322-339	452	130	M12*230	6
DN300	332-349	463	130	M12*230	6
DN350	351-368	510	165	M16*250	6
DN350	374-391	510	165	M16*250	8
DN400	400-429	560	165	M16*250	8
DN400	410-436	560	165	M16*250	8
DN400	417-437	560	165	M16*250	8
DN400	425-442	560	165	M16*250	8
DN450	480-500	630	165	M16*250	8
DN500	500-535	700	165	M16*250	10
DN500	526-546	700	165	M16*250	10
DN600	600-630	830	165	M16*250	10
DN600	630-650	830	165	M16*250	10