



A Data Driven Toggling Gain Complementary Filtering Approach for Orientation Estimation

Network and Data Analysis Group

Samnun Azfar - 200041130

Ramisa Zaman Audhi - 200041131

Mir Md Inzamam - 200041240

Supervised by

Abu Raihan Mostofa Kamal

Professor

Department of CSE

Islamic University of Technology

Co-supervised by

Mohammad Ishrak Abedin


Lecturer

Department of CSE


Islamic University of Technology

Introduction


Orientation Algorithms in Real World Applications

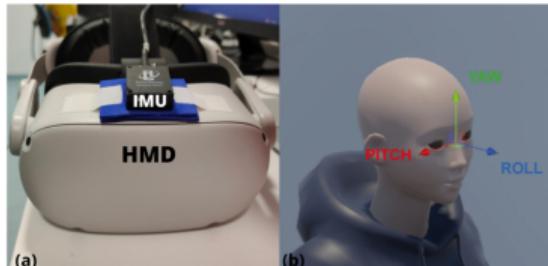

VR Head-mount

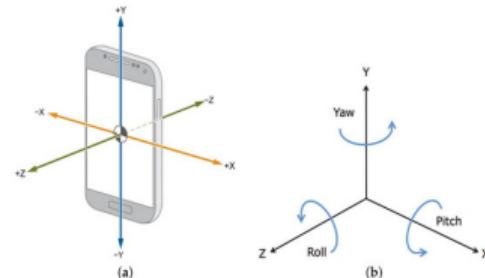

Smartphone orientation

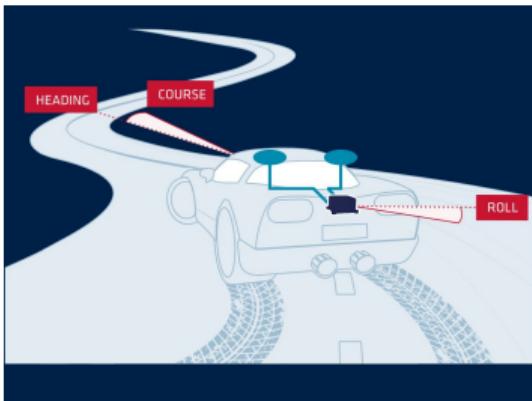

Autonomous vehicles


IMUs and MARG Sensors

Sensors Keep Motors Healthy



Anomaly Detection for Predictive Maintenance


Gesture Recognition




Step Counter App
Make Every Step Count!



Indoor Positioning

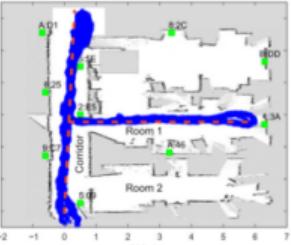

Gyroscope & Accelerometer



Applications

Precise Ball Data



A Data Driven Toggling Complementary Filtering Approach for Orientation Estimation

September 28, 2025

Sensor Fusion Concept

- Individual sensors have complementary strengths: - **gyroscopes** measure rotation but **drift over time**, **accelerometers** measure tilt via gravity but are **noisy during movement**, **magnetometers** give heading but are **disturbed by local fields**.
- Sensor fusion algorithms (e.g., Kalman[15][7][16] or complementary filters[11]) combine these readings to obtain a stable orientation estimate. By using multiple sensors, we can **“reduce orientation drift introduced through the gyroscope measurements”** using gravity and magnetic references.

Goal

The goal is to filter out noise and biases: high-frequency noise from accelerometers is smoothed, while low-frequency gyro drift is corrected by accelerometer/magnetometer data, yielding a robust attitude estimate.

Complementary Filter (CF) Approach

- The complementary filter **fuses gyro and accelerometer data** by applying a high-pass filter to the **gyro** (tracking quick changes) and a low-pass filter to the **accelerometer** (tracking slow changes)[11].

General Equation of the weighted sum

$$\theta(t) = (1 - \alpha) \text{ (gyro-integrated angle)} + \alpha \text{ (accel-derived angle)}$$

- The blending weight α (between 0 and 1) is tuned based on sensor characteristics.
- This yields the “**best of both worlds**”: the gyro provides a smooth angle during motion, and the accelerometer corrects long-term drift. Properly tuned, the CF can yield orientation with low noise and low.

Complementary Filter: Pros and Cons

Advantages

- Very simple and efficient to implement on micro-controllers.
- Requires minimal computation.
- Effectively reduces random noise (accelerometer) and drift (gyroscope)[18].

Disadvantages

- Fixed filter gains cannot adapt to changing dynamics or sensor conditions.
- Gyroscope biases over time introduce drift if not perfectly zeroed.
- Assumes a stable magnetic reference—magnetic disturbances cause yaw drift.

In summary, CF is computationally light and effective for many scenarios but can struggle during aggressive motion or magnetic interference, motivating adaptive extensions.

Uses and Applications

Consequences of Poor Orientation Estimation

- In VR/AR, incorrect orientation causes virtual objects to **lag or shift unexpectedly**, leading to **user disorientation or motion sickness**. The “reality” no longer matches the user’s motions.
- In navigation (drones, aircraft, robotics), bad attitude estimates can cause control errors or crashes. For example, a drone in strong magnetic interference may misread its yaw and slowly rotate off course.
- Inertial systems are immune to jamming (no external signals needed), but they rely on **sensor accuracy**. If magnetic disturbances occur, a MARG system “will over time result in a drift in the heading estimate”.

Therefore, improving orientation accuracy is critical for safety and user experience.

Data-Driven and Machine Learning Methods

- Modern approaches use **data analysis and machine learning** to enhance orientation filters. For example, auxiliary sensor data (like eye tracking) can be fused to detect motion phases and correct drift.
- Machine learning can learn **complex biases or map raw sensor patterns to orientation**, effectively “calibrating” IMUs from data. Recent studies show ML-tuned filters outperform fixed filters in sports and motion tracking.
- This aligns with the data science paradigm: extracting knowledge and patterns from data to make better. By analyzing large IMU datasets, ML models can improve orientation estimates beyond classic CF assumptions.

Best of both worlds?

Combining **traditional filters** with **data-driven tuning** offers more adaptive, accurate orientation estimation [19].

Literature Review

Literature Review (Paper 1)

Adaptive Attitude Estimation Using a Hybrid Model-Learning Approach (2022) [19]

Authors: Eran Vertzberger, Itzik Klein

Journal: IEEE Transactions on Instrumentation and Measurement

Overview:

Demonstrates a **hybrid adaptive complementary filter** that learns axis-specific accelerometer weights via neural networks. Quaternion gyro data is integrated and a complementary update is applied in each axis whose weight is predicted by a small neural network based on estimated linear accelerations.

Evaluation:

- Smartphone IMU dataset (60 two-minute sequences of walking activities in pocket, hand, etc., with VI-SLAM ground truth)

Benchmark:

- Fixed-gain filters (Mahony[14], Madgwick[13])

Contributions:

- Learned filter (DAE) yielded the lowest roll/pitch errors (10–37% better than classic filters).
- Adapts to dynamic motion via data-driven weight tuning.
- Outperforms fixed gains under varying conditions.

Disadvantages:

- Requires labeled training data and offline learning.
- Neural nets add complexity.
- Yaw is not addressed (no magnetometer fusion).

Literature Review (Paper 2)

A Robust Complementary Filter Approach for Attitude Estimation of Unmanned Aerial Vehicles using AHRS (2019) [1]

Authors: Johann Meyer, Kreelan Padayachee, Benjamin A. Broughton

Conference: CEAS EuroGNC 2019

Overview:

Explicitly detects when accelerometers are unreliable based on “steadiness” measure (using a low-pass on the accel magnitude) to decide if the vehicle is in steady flight. When unsteady, the filter relies on gyro propagation only; when steady, normal fusion occurs. A Gaussian random-walk model for gyro bias is implemented that rejects improbable bias drifts during maneuvers. **Evaluation:**

- Monte Carlo simulations (maneuvering UAV trajectories)

Contributions:

- Monte Carlo simulations show their filter tracks roll dynamics more accurately than standard CFs[11].
- Simple gating logic avoids gross errors from accelerometer disturbances.
- Robust gyro bias handling.

Disadvantages:

- Effectively disables accelerometer fusion during dynamics (so short-term drift may grow).
- Requires tuning of “steadiness” thresholds.
- Only tested in simulations.

Literature Review (Paper 3)

Adaptive Complementary Filtering Algorithm for IMU Based on MEMS (2020) [21]

Authors: Zhang Zhe, Wang Jian-bin, Song Bo, Tong Guo-feng

Conference: 2020 Chinese Control and Decision Conference, CCDC, IEEE

Overview:

An **adaptive sparse-interpolation CF (ASICF)** has been proposed for MEMS IMUs. A quaternion-based complementary filter is used to fuse gyro and accel, but an adaptive data-skip mechanism is added: the filter monitors consecutive accelerometer samples, assesses the “trustworthiness” of the accel (via its variation), and if the data are too noisy or dynamic, it performs an interpolation step rather than using the raw sample (downsampling).

Evaluation:

- Multiple datasets (drone, car, human motion)

Benchmark:

- Fixed-gain filters (Mahony[14], Madgwick[13])

Contributions:

- Reported significantly lower attitude errors under large disturbances (e.g. 20% smaller error than the Valenti CF [18]).
- Can handle sudden motions by effectively smoothing or skipping bad accelerometer readings.
- Retains quaternion CF structure.

Disadvantages:

- Performance depends on correctly detecting outliers.
- May introduce lagging when interpolating

Literature Review (Paper 4)

A Variable Gain Complementary Filtering Fusion Algorithm Based on Distributed Inertial Network and Flush Air Data Sensing (2023) [17]

Authors: Weiguang Shao, Jianwen Zang, Jin Zhao and Kai Liu

Journal: Applied Sciences (ISSN 2076-3417) 2023, MDPI

Overview:

A variable-gain CF for aircraft angle-of-attack estimation is introduced which uses a distributed IMU network plus flush-air sensors. A flight-phase-dependent blending factor is derived: the filter coefficient (analogous to α) which is allowed to vary with the change rate of the angle-of-attack, placing more weight on inertial data at high dynamics.

Contributions:

- Simulation results for a high-speed UAV show this VGCF yields significantly smaller AoA error than a constant-gain INS+FADS filter (approximately 0.0058° vs 0.0017° RMSE, i.e. $>2\times$ improvement)
- Adapts filtering to flight conditions, mitigating delay in air-data measurements

Disadvantages:

- Heavily domain-specific (flush-air data, aerodynamic model).
- Complexity of inertial network fusion.

Literature Review (Paper 5)

Denoising IMU Gyroscopes With Deep Learning for Open-Loop Attitude Estimation (2020)

[4]

Authors: Martin Brossard, Silvère Bonnabel, Axel Barrau

Journal: IEEE Robotics and Automation Letters (Volume: 5, Issue: 3, July 2020)

Overview:

A **deep convolutional network** to denoise IMU gyroscopes for open-loop attitude estimation is introduced, where a CNN (with dilated convolutions) is trained on ground-truth data so that it outputs corrected gyro increments. The orientation is then obtained by simply integrating these denoised increments in dead-reckoning. Their loss is carefully designed for angular increments, and no RNNs are used (making inference fast).

Evaluation:

- EuRoC and TUM-VI Datasets

Contributions:

- Outperforms state-of-the-art methods and even beats top visual-inertial odometry algorithms in attitude accuracy.
- End-to-end learned correction captures complex noise/scale drift.
- No vision needed yet achieves very low drift.

Disadvantages:

- Requires large ground-truth datasets for training design is more complex.
- Open-loop mode still drifts (albeit slower).
- Network complexity.

Literature Review (Paper 6)

Generalizable End-to-End Deep Learning Frameworks for Real-Time Attitude Estimation Using 6DoF Inertial Measurement Units (2023)

[2]

Authors: Arman Asgharpoor Golroudbari, Mohammad Hossein Sabour

Journal: Measurements (Volume 217, 113105) Elsevier

Overview:

An **end-to-end neural IMU attitude estimator** is proposed. Two deep models (CNN+BiLSTM+FC) are trained to directly map 6-DOF IMU sequences to quaternions. Training uses seven public datasets (120+ hours of motion). Their models generalize across different motions, sampling rates and disturbances, and they report higher accuracy than prior methods.

Evaluation:

- Seven public datasets including EuRoC and TUM-VI

Contributions:

- Leverages temporal convolution and recurrent units for rich modeling.
- Tested on massive diverse data

Disadvantages:

- Heavy models requiring long training.
- “**Black box**”, so no physical insight.
- Relies on availability of similar data during training.

Gaps and Opportunities (1/3)

Lack of Real-Time Adaptivity

- Static parameters cannot adapt to dynamic changes [13][11][9]
- Unexpected accelerations degrade accuracy [10]

Solution: Adaptive Learning

- Dual-XGBoost adjusts fusion weights online from incoming IMU data.
- Responds dynamically to abrupt motions or disturbances.

Lack of Explicit Noise Prediction

- Assumes constant noise [15][16][7] can't predict sensor drift [8].
- Can't handle temperature-induced or vibration noise changes[8].

Solution: Predictive Noise Modeling

- XGBoost predicts gyro bias/variance from real-time sensor data.
- Learns time-varying noise models to maintain estimation accuracy.

Gaps and Opportunities (2/3)

Over-Reliance on Fixed Gains

- Fixed gains cause large estimation errors in dynamic motions [10][13]
- Can't balance between under-correction and over-correction[17][15]

Challenge: Heavy Computational Burden

- DNNs[2][1][4] and advanced EKFs[15][7] are too heavy for real-time embedded systems.
- Require GPUs or powerful processors[6].

Solution: Dynamic Gain Tuning

- XGBoost adaptively infers fusion weights from current IMU readings.
- Eliminates need for manual gain tuning.

Solution: Lightweight Inference

- XGBoost is efficient at runtime: fast tree traversal, no heavy matrix ops.
- Suitable for real-time operation on micro-controllers.

Gaps and Opportunities (3/3)

Loss of Interpretability

- Deep models[2][1][4] are black-box; internal logic is opaque.
- Lack of physical insight makes debugging difficult [6].

Solution: Transparent Design

- XGBoost trees are interpretable: splits and feature importance visible.
- Fusion logic explicitly maintains ties to physics.

Proposed Solution

Proposed Modified Complementary Filter

Noise Prediction & Removal [4]

- Input raw sensor (acc, mag, gyro) columns:
 $a_i = (a_{ix}, a_{iy}, a_{iz})$, $m_i = (m_{ix}, m_{iy}, m_{iz})$,
 $g_i = (g_{ix}, g_{iy}, g_{iz})$.
- Trained regressor predicts noise components
 η_a, η_m .
- Denoised vectors:

$$a_i = a_i - \eta_a, \quad m_i = m_i - \eta_m$$

$$a_{pred} = R_g * a_{(i-1)pred}(1 - \alpha) + \alpha * a_i$$

$$m_{pred} = R_g * m_{(i-1)pred}(1 - \alpha) + \alpha * m_i$$

- In the above equations R_g is the quaternion or rotation matrix [3][5].

Movement Prediction & α Toggling [19]

- Toggling Engine analyzes g_i (gyro) patterns to classify motion state.
- Generates adaptive gain α based on predicted movement (static vs. dynamic).
- Compute gyro-based update:

$$R_g = \exp\left(\Omega_\times(g_i) \delta t\right)$$

where Ω_\times is the skew-symmetric operator [20].

- Final CF fusion in 24:

$$R = (1 - \alpha) R_g + \alpha R_{am}.$$

Proposed Modified Complementary Filter

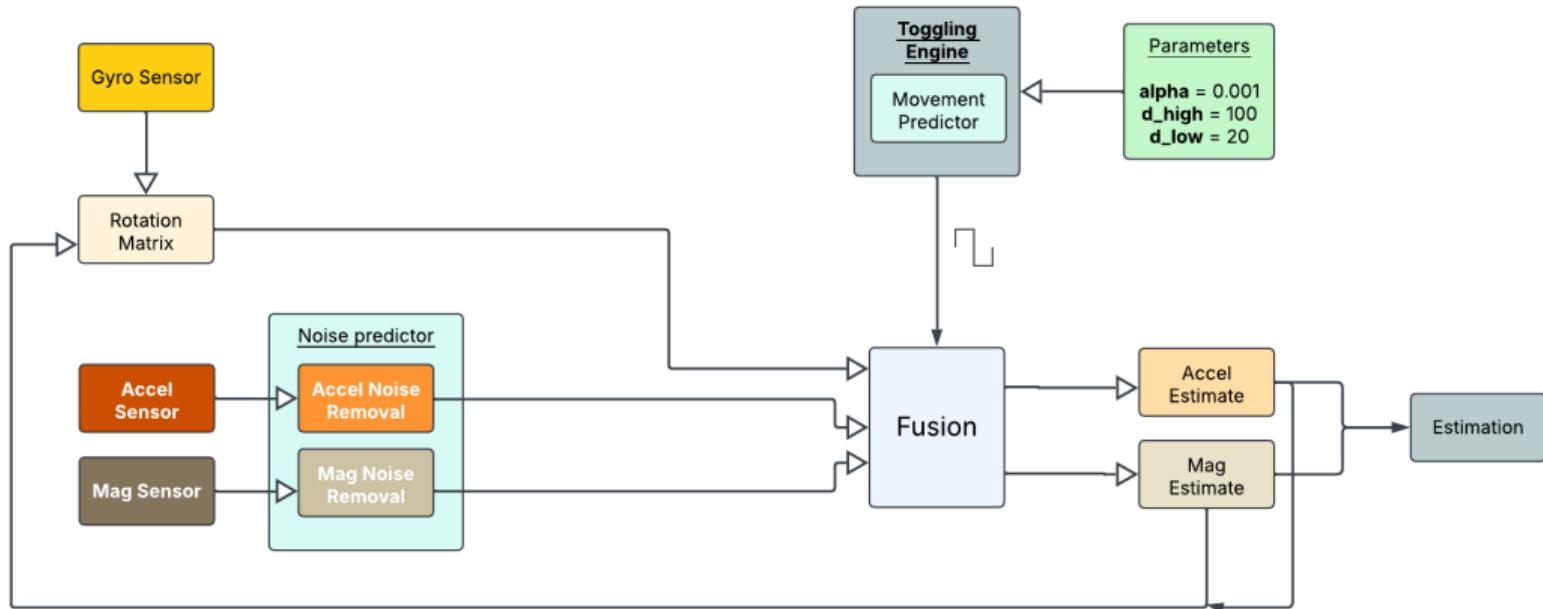


Figure: Toggling Engine: Modified Filter Diagram with Noise Prediction and Movement Prediction

XGBoost Ensemble

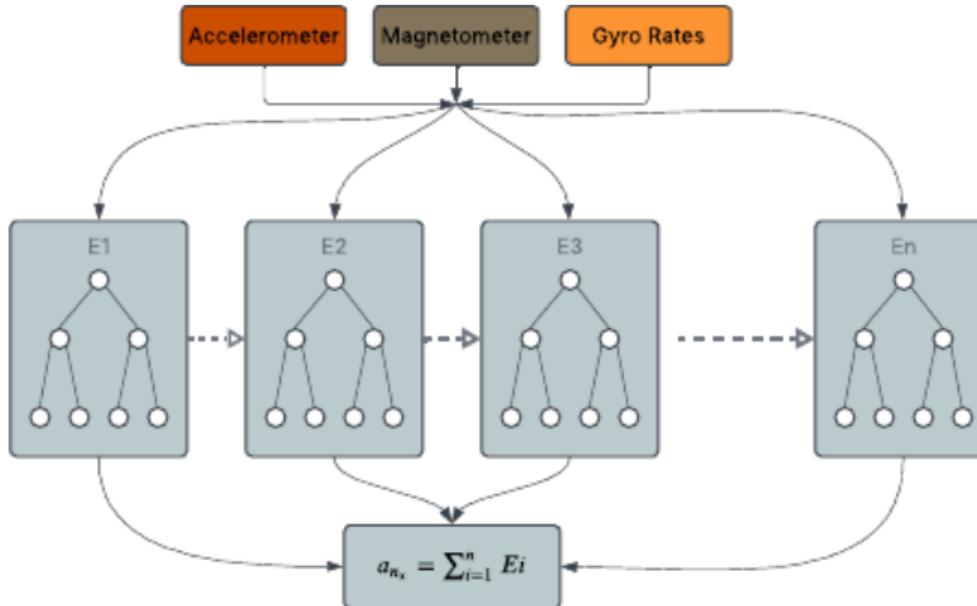


Figure: Prediction of One component of noise through an Ensemble model(XGB in our case)

Dataset Overview: BROAD

- Berlin Robust Orientation Estimation Assessment Dataset (BROAD) [12]
- **Trials:** 39 recordings of predefined motions
- **Sampling:**
 - OptiTrack ground truth: position opt_pos & orientation opt_quat at 120Hz
 - IMU MARG data: accelerometer, gyroscope, magnetometer at 286Hz
 - Boolean movement flag per timestamp
- **Hardware:**
 - Custom 3D-printed mount with myon aktos-t 9-axis IMU
 - Optical markers for tracking by OptiTrack OMC system
- **Motion types:** undisturbed (rotation, translation, combined; slow/fast) and disturbed (tapping, vibration, magnets, office, mixed)
- Detailed protocol in the BROAD paper:
<https://www.mdpi.com/2306-5729/6/7/72>


Dataset Details: Categories & Hardware

Motion Type	Speed	Indices
Undisturbed		
Rotation	Slow	01–05
Rotation	Fast	06–09
Translation	Slow	10–14
Translation	Fast	15–18
Combined	Slow	19–20
Combined	Fast	21–23
Disturbed (Medium Speed)		
Tapping	—	24–25
Vibrating Smart-phone	—	26–27
Stationary Magnet	—	28–31
Attached Magnet (1–5)	—	32–36
Office Environment	—	37–38
Mixed	—	39

01_undisturbed_slow_rotation_A.hdf5

- imu_acc
- imu_gyr
- imu_mag
- movement
- opt_pos
- opt_quat

(a) Dataset columns overview

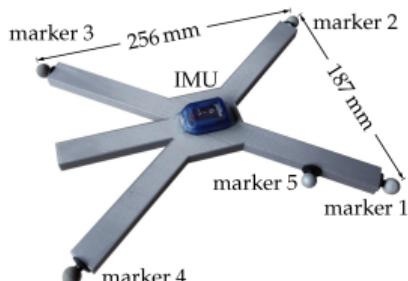

(b) 3D-printed mount with IMU (OptiTrack markers)

Experimental Setup

Training to Predict Movement Noise: Dataset

- **Movement Prediction Model:** Train **XGB classifier** to predict if the IMU is in motion.
- **Noise Prediction Model:** Train **XGB regressor** to predict noises in raw accelerometer data.
- **Implementation of the Modified CF:** Implementation of our proposed algorithm in python and evaluating it through the BROAD dataset trials.

Testing: Dataset

- **Evaluation Setup:** Cross-validation set $\{8, 14, 17, 22, 30\}$ used to estimate quaternions; error = mean quaternion distance between estimated and ground truth per recording.
- **Hyperparameter Selection:** Empirical tuning + grid search. Optimal values: $\alpha = 0.001$, $d_h = 120$, $d_l = 60$ (balancing drift, responsiveness, smoothness).
- **Dataset Dependence:** Parameters may be overfitted to dataset noise/motion patterns; may not generalize to other datasets or devices with different sensor characteristics.

Testing: Mechanical Turntable

- **Design & Construction:** Built in Fusion360, 3D-printed PLA/ABS parts, 28 cm diameter, 1.5 kg mass. Manual actuation (no motor); rotation applied by hand.
- **Mechanical Components:**
 - Circular rotating disk on 6010 bearing.
 - Box-shaped support structure with encoder magnet in base.
 - AS5600 magnetic encoder for ground-truth sensing.
- **Ground-Truth Encoder (AS5600):** 12-bit resolution ($\approx 0.087^\circ/\text{step}$), $\pm 0.4^\circ$ typical accuracy, up to $\pm 1.4^\circ$ deviation under misalignment. Latency: 1–2 ms, outputs via I2C, PWM, or analog.
- **On-Disk Payload:** Raspberry Pi 5 (8 GB), MPU9250 MARG sensor, 20,000 mAh power bank.

Mechanical Turntable Setup

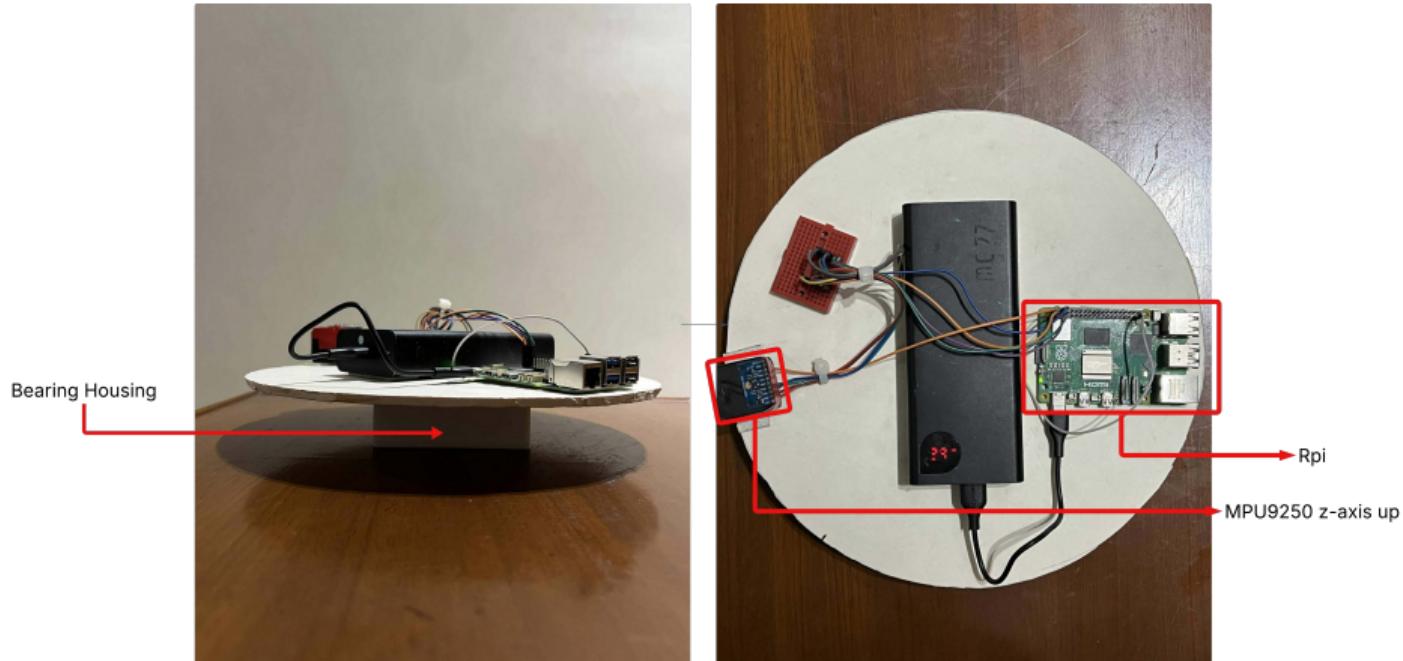


Figure: Mechanical Turntable side view (left) and top view (right).

Motion Protocols & Software Setup

- **Motion Protocols:**
 - **Static:** No movement; tests sensor stability and drift.
 - **Quasi-static:** Slow 0° – 180° rotation (clockwise & counterclockwise), two cycles per axis.
 - **Dynamic:** Continuous rapid rotations (3, 4, 5 turns per cycle).
- **Software Infrastructure:**
 - Raspberry Pi runs 4 parallel Python scripts: Proposed Filter, AQUA, EKF, Madgwick.
 - Reads MPU9250 sensor (accel, gyro, mag) via I2C.
 - AS5600 encoder provides ground-truth quaternions.
 - All filter outputs + ground truth logged into CSV for post-processing.
- **Result Generation:** Quaternion absolute distance metric (Sec. 9.2) computed and plotted to compare filter performance under each motion type.

Results

Results of α -toggling and noise removal across individual files

Red - Madgwick Filter | Green - Complementary Filter | Blue - Our Proposed Filter

X-axis: iterations

Y-axis: mean error(lower the better)

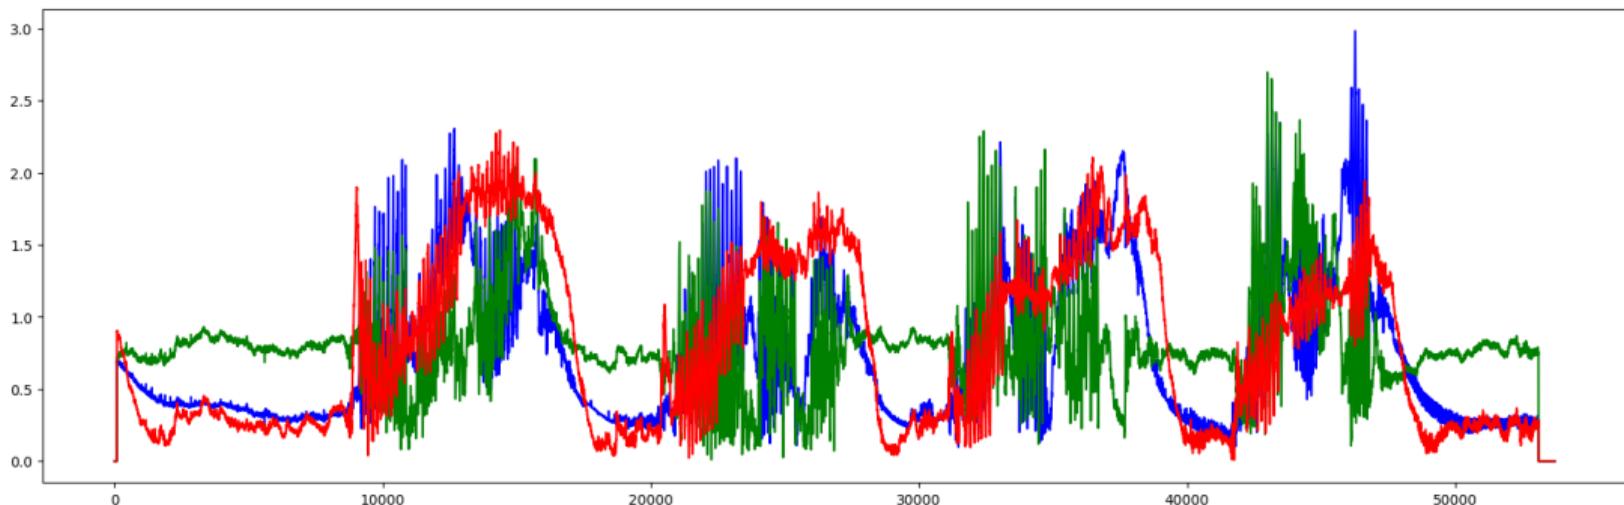


Figure: 9_undisturbed_fast_rotation_with_breaks_B

Results of α -toggling and noise removal across individual files

Red - Madgwick Filter | Green - Complementary Filter | Blue - Our Proposed Filter

X-axis: iterations

Y-axis: mean error(lower the better)

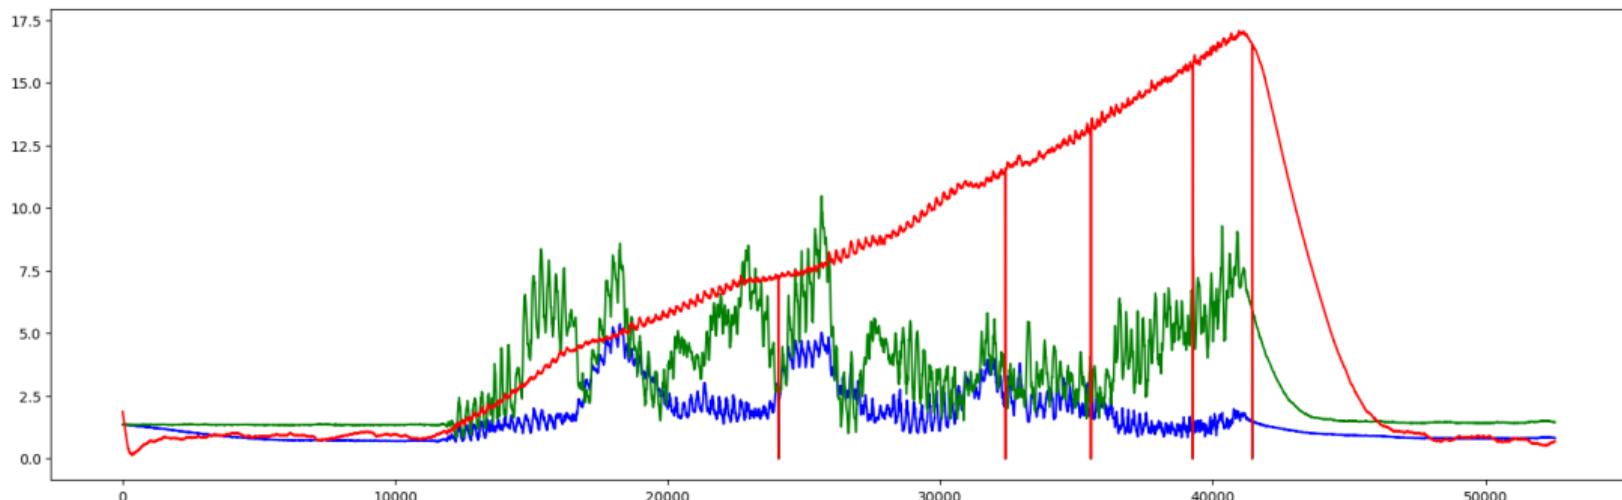


Figure: 15_undisturbed_fast_translation_A

Results of α -toggling and noise removal across individual files

Red - Madgwick Filter | Green - Complementary Filter | Blue - Our Proposed Filter

X-axis: iterations

Y-axis: mean error(lower the better)

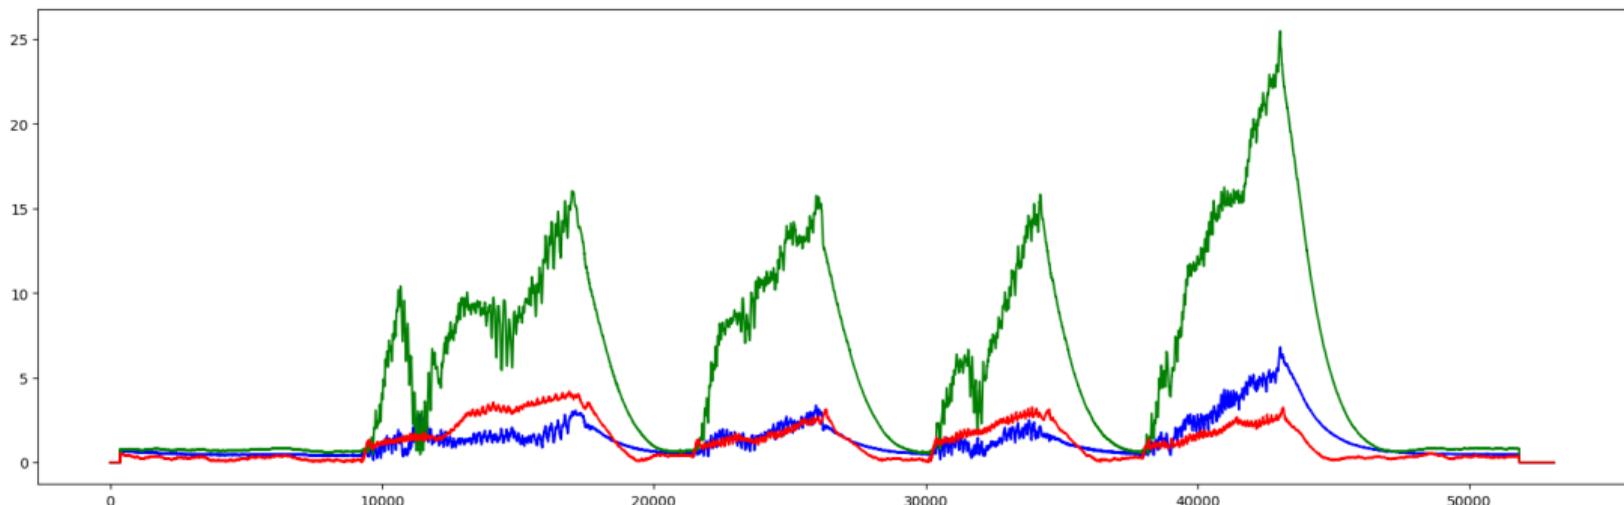


Figure: 18_undisturbed_fast_translati on_with_breaks_B

Results of α -toggling and noise removal across individual files

Red - Madgwick Filter | Green - Complementary Filter | Blue - Our Proposed Filter

X-axis: iterations

Y-axis: mean error(lower the better)

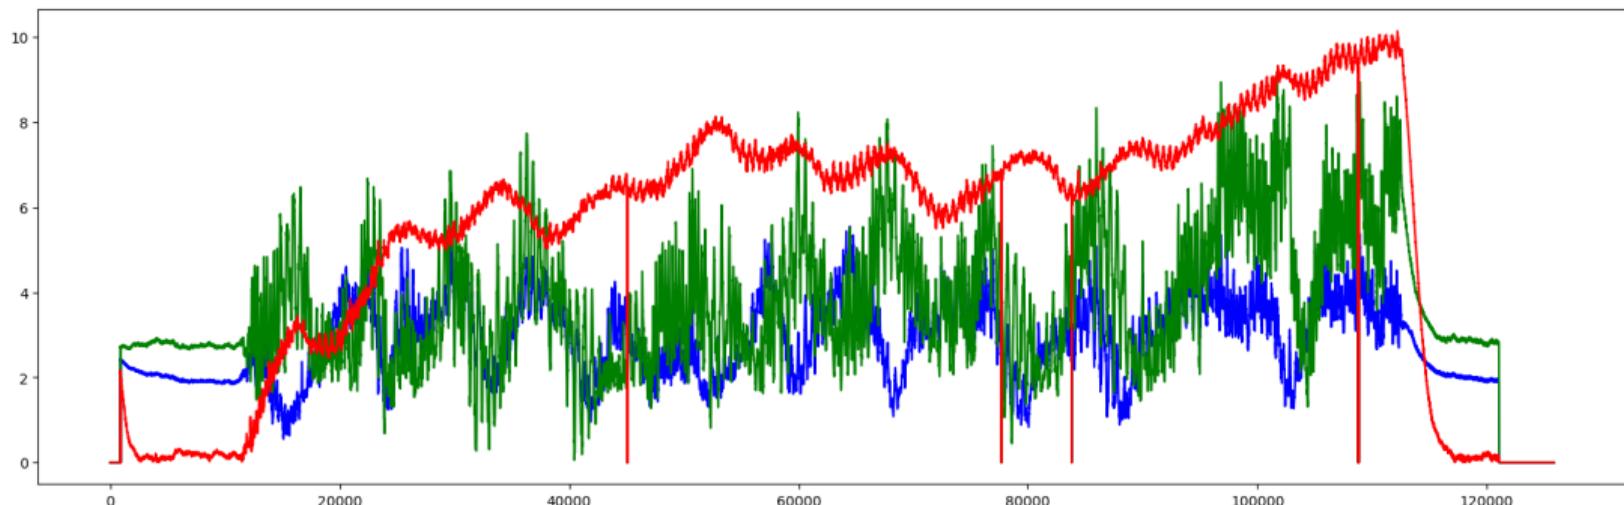


Figure: 23_undisturbed_fast_combined_360s

Shortcomings

Shortcomings of Our Data-Driven CF

- **Model Size & Memory:** XGBoost inference is $O(\log n)$ per tree (depth=15, 6 vars, 15 estimators) → wide trees consume significant memory.
- **Computational Overhead:**
 - Matrix exponentiation for R_g rotations.
 - RANSAC-based training adds extra latency.
- **Training Time:** RANSAC loop and ensemble fitting are time-intensive.
- **Generalizability:** Noticeable drop in performance on cross-validation vs. test sets.

Future Works

Evaluation Methodology

Data & Protocol

- Single MARG dataset for all tests (accel, gyro, mag).
- Controlled motions via gimbal and turntable setups.
- Identical trajectories, speeds, and motion types.

Algorithms Under Test

- Extended Kalman Filter (EKF)
- Madgwick Filter
- Proposed Modified Complementary Filter

Comparison Metrics

- **Accuracy:** RMSE of roll, pitch, yaw vs. OptiTrack ground truth.
- **Efficiency:**
 - Execution time per sample.
 - Memory footprint.
- **Robustness:**
 - Static vs. dynamic motions.
 - Undisturbed vs. disturbed conditions.

Goal: Assess whether the proposed filter improves accuracy and/or runtime under varied conditions.

Deployment Challenges & Strategy

Challenge: Resource Constraints

- XGBoost model size: 25MB flash memory
- ESP32 max flash: 4MB
- Limited CPU and RAM on embedded platforms

Proposed Strategy

- **Model Optimization:**
 - Quantization & pruning
 - Tree depth reduction
 - Converter to light-weight formats (e.g., Treelite)
- **Fallback Deployment:**
 - If ESP32 still infeasible, deploy on Raspberry Pi
 - Leverage its higher memory and CPU capabilities

References

References I

- [1] “A robust complementary filter approach for attitude estimation of unmanned aerial vehicles using AHRS,” in *Proceedings of the 2019 CEAS EuroGNC conference*, CEAS-GNC-2019-036, Milan, Italy, Apr. 2019.
- [2] A. Asgharpoor Golroudbari and M. Sabour, *End-to-end deep learning framework for real-time inertial attitude estimation using 6dof imu*, Feb. 2023. DOI: [10.22541/au.167628608.89589390/v1](https://doi.org/10.22541/au.167628608.89589390/v1)
- [3] H. D. Black, “A passive system for determining the attitude of a satellite,” *AIAA journal*, vol. 2, no. 7, pp. 1350–1351, 1964.
- [4] M. Brossard, S. Bonnabel, and A. Barrau, “Denoising imu gyroscopes with deep learning for open-loop attitude estimation,” *IEEE Robotics and Automation Letters*, vol. 5, no. 3, pp. 4796–4803, 2020. DOI: [10.1109/LRA.2020.3003256](https://doi.org/10.1109/LRA.2020.3003256)

References II

- [5] A. Cariow and G. Cariowa, "A hardware-efficient approach to computing the rotation matrix from a quaternion," *arXiv preprint arXiv:1609.01585*, 2016.
- [6] C. Chen and X. Pan, "Deep learning for inertial positioning: A survey," *IEEE Transactions on Intelligent Transportation Systems*, vol. 25, no. 9, pp. 10 506–10 523, 2024. DOI: 10.1109/TITS.2024.3381161
- [7] Y. Chen and H. Rong, "A customized extended kalman filter for removing the impact of the magnetometer's measurements on inclination determination," *Sensors*, vol. 23, no. 24, 2023, ISSN: 1424-8220. DOI: 10.3390/s23249756 [Online]. Available: <https://www.mdpi.com/1424-8220/23/24/9756>
- [8] R. K. R. Damagatla and M. Atia, "Improved imu/gnss ekf fusion using xgboost machine learning algorithm," in *2024 14th International Conference on Electrical Engineering (ICEENG)*, 2024, pp. 276–281. DOI: 10.1109/ICEENG58856.2024.10566377

References III

- [9] M. B. Del Rosario, N. H. Lovell, and S. J. Redmond, "Quaternion-based complementary filter for attitude determination of a smartphone," *IEEE Sensors Journal*, vol. 16, no. 15, pp. 6008–6017, 2016. DOI: 10.1109/JSEN.2016.2574124
- [10] M. P. van Dijk, M. Kok, M. A. M. Berger, M. J. M. Hoozemans, and D. H. E. J. Veeger, "Machine learning to improve orientation estimation in sports situations challenging for inertial sensor use," *Frontiers in Sports and Active Living*, vol. Volume 3 - 2021, 2021, ISSN: 2624-9367. DOI: 10.3389/fspor.2021.670263 [Online]. Available: <https://www.frontiersin.org/journals/sports-and-active-living/articles/10.3389/fspor.2021.670263>
- [11] W. T. Higgins, "A comparison of complementary and kalman filtering," *IEEE Transactions on Aerospace and Electronic Systems*, vol. AES-11, no. 3, pp. 321–325, 1975. DOI: 10.1109/TAES.1975.308081

References IV

- [12] D. Laidig, M. Caruso, A. Cereatti, and T. Seel, "Broad—a benchmark for robust inertial orientation estimation," *Data*, vol. 6, no. 7, p. 72, 2021.
- [13] S. O. Madgwick, A. J. Harrison, and R. Vaidyanathan, "Estimation of imu and marg orientation using a gradient descent algorithm," in *2011 IEEE international conference on rehabilitation robotics*, ieee, 2011, pp. 1–7.
- [14] R. Mahony, T. Hamel, and J.-M. Pflimlin, "Nonlinear complementary filters on the special orthogonal group," *IEEE Transactions on automatic control*, vol. 53, no. 5, pp. 1203–1218, 2008.
- [15] J. Marins, X. Yun, E. Bachmann, R. McGhee, and M. Zyda, "An extended kalman filter for quaternion-based orientation estimation using marg sensors," in *Proceedings 2001 IEEE/RSJ International Conference on Intelligent Robots and Systems. Expanding the Societal Role of Robotics in the the Next Millennium (Cat. No.01CH37180)*, vol. 4, 2001, 2003–2011 vol.4. DOI: 10.1109/IROS.2001.976367

References V

- [16] A. Sabatini, "Quaternion-based extended kalman filter for determining orientation by inertial and magnetic sensing," *IEEE Transactions on Biomedical Engineering*, vol. 53, no. 7, pp. 1346–1356, 2006. DOI: 10.1109/TBME.2006.875664
- [17] W. Shao, J. Zang, J. Zhao, and K. Liu, "A variable gain complementary filtering fusion algorithm based on distributed inertial network and flush air data sensing," *Applied Sciences*, vol. 13, no. 14, 2023, ISSN: 2076-3417. DOI: 10.3390/app13148090 [Online]. Available: <https://www.mdpi.com/2076-3417/13/14/8090>
- [18] R. Valenti, I. Dryanovski, and J. Xiao, "Keeping a good attitude: A quaternion-based orientation filter for imus and margs," *Sensors*, vol. 15, pp. 19 302–19 330, Aug. 2015. DOI: 10.3390/s150819302

References VI

- [19] E. Vertzberger and I. Klein, "Adaptive attitude estimation using a hybrid model-learning approach," *IEEE Transactions on Instrumentation and Measurement*, vol. 71, pp. 1–9, 2022.
- [20] S. Zhao, "Time derivative of rotation matrices: A tutorial," *arXiv preprint arXiv:1609.06088*, 2016.
- [21] Z. Zhe, W. Jian-bin, S. Bo, and T. Guo-feng, "Adaptive complementary filtering algorithm for imu based on mems," in *2020 Chinese Control And Decision Conference (CCDC)*, 2020, pp. 5409–5416. DOI: [10.1109/CCDC49329.2020.9164809](https://doi.org/10.1109/CCDC49329.2020.9164809)

Thank you!