

Item	Description	Model	Qty	Unit Price (USD)	Amount (USD)	Specification
Part 1						
RO water machine						
1	Raw water pump	4000L/h SS304 CHL4-40	1	4,500	4,500	1) FRP pretreatment filters (Quartz Sand /Activated Carbon) 2) 2Ton pure water tank SS304 3) USA tech RO Membranes 4) UV & Ozone post treatment system
	Quartz sand filter	4000L/h FRP Φ450mm	1			
	Active carbon filter	4000L/H FRP Φ450mm	1			
	Security filter	5um	1			
	High pressure pump	4000L/h SS304 CDL4-160	1			
	Primary Reverse Osmosis system	2000L/h	1			
2	UV system (matching 2000LPH need 80Watt system)	40 watt	2	200	400	
3	Ozone Generator machine	SOZ-YB-6G	1	650	650	
4	Raw and Pure Water Tank with water level controller	SS304 material 2CBM	2	550	1,100	
Part 2						
3000BPH small bottle production line						
1	Automatic Bottle washing-filling-capping machine	HJ8-8-3 2000-3000B/H	1	13,950	13,950	1) 2m air conveyer, 2m belt conveyer 2) Automatic cap feeding machine 3) 8 washing units, 8 filling nozzles,3 capping heads 4) Mitsubishi PLC + inverter control system 5) lamp inspection unit 6) Label shrinking oven 7) Steam generator(12kw) 8) 3m additional conveyor
	Cap loader	CL-3	1			
	Light checker	LC-3	1			
	Semi Auto Shrink Labeling machine	SL-3	1			
2	Automatic laser coding machine	20 Watt	1	3,550	3,550	1) 20W CO2 Laser Generating unit 2) Red light positioning system
3	Shrink wrapper packing machine	HJ-80A 2000-3000B/H	1	3,550	3,550	1) Automatic film cutting & wrapping machine 2) Heat shrinking oven (Film wrapping ,cutting and shrinking)
Part 3						
Bottle blowing line						
1	Small bottle blowing machine	HJ-I	1	6,600	6,600	1) Two cavity blowing unit&one heating unit 2) 1 M3/30kg air compressor ,high pressure tube 3) Air filter 4) Mould 1set
	Bottle mold(500ml)	2 cavity	1	700	700	
Total Amount EXW Jiangmen China , USD 35,000						

Remark:

This price includes 1 year of wearing parts, such as PP filter ect which showed in spare parts list below.

Payment: T/T30% as deposit; T/T 70% after inspection before shipment

Delivery Date: 30 days after receiving deposit & approval details;

Packing: Cover by PVC film +plywood case+ pallet

All of our water treatment equipments warranty for 18 MONTHS!

Guarantee : 1 year when products arrive at customer side

Installation and training:

We will give you technical and install training when you come to check out the finished machine .

Or if customer request, We will install and test the machines and have training lessons abroad, but the round tickets, the visa ,accommodation, eating, and the allowance of 100 USD per day per person will be on customer's side.

Part 1

SPECIFICATION FOR WATER MACHINE



A. System design basis

- 1.(1) Raw water quality : later need to base on client report ,now design as TDS less than 1000ppm .
2. (1) produce water flow meter: 2M³/h water temperature :25℃
(2) Product water quality: WHO drinking water standard

B. Technology instruction :

- 1、 It adopts current advanced RO system , the output water no kernel,pure.
- 2、 this system adopts American technology RO membrane ,the rate of removed salt is 98%,recovery 50%-75%,and shapes the special character. The whole system can get rid of bacterial virus , heavy metallic irons. radioactive elements ,organic pollutant each is 99.99%,95%, 99%,95% ,the quality of water sweet ,clean. Also get rid of poison harmful material in source water, such as four chlorination carbons, benzenese, hydrocarbon, agrochemical, and lead, mercury ,chrome,etc other radioactive element all be tested a limit the following.

Technical data of ro pure water machine

Item	Name	Material origin	Model	Quantity	Remark
1	Raw water pump	“CNP” pump	CHL4-40	1 set	Voltage 380V power 0.75KW flow meter 4M ³ /h working pressure 0.2MPa
	Quartz sand filter	FRP	Φ500*1650	1 set	Working pressure 0.2Mpa flow meter : 4M ³ /h flow rate: 15-18m/h Quartz sand: 250kg
	Active carbon filter	FRP	Φ500*1650	1 set	Working pressure 0.2Mpa ,flux: 4M3/h flow rate :15-18m/h active carbon 125kg

	PP sediment filter	PP	Φ230×1000	1 set	Flux4M3/h pressure ::0.2Mpa with 5u×1000filter element
2	RO system				Automatic backwash ,manual backwash, protected when shortage water or high power rated flux 2M ³ /h rated pressure: 1·0-1.5Mpa the rate of remove salt 98%-99% Recovery 50-75%
	Housing membrane	SUS304	4040	7pieces	
	Membrane	American	4040	7pieces	USA and salt remove recovery 99.75%
	Multi-phases pump	“CNP” stainless steel 304 pump	CDL4-160	1 set	Voltage 380V power 3KW Working pressure1.0-1.5Mpa Flux :4M3/H
	Electrical conductivity motor	Made in China		1 pcs	
	Flow meter	Suzhou	2.5T	2 piece	
	Electron magnetic valve	Made in China	DF25	1 piece	
	Stainless steel frame	SUS304		1 set	
3	Electrical components, pipe joints, pressure gauges, packing containers				

Main Character:

RO system recovery :50-75%


RO system remove salt : 98-99%

RO system flux :2M³/h

RO working voltage :220V

RO system power: 40KW

Flow chart

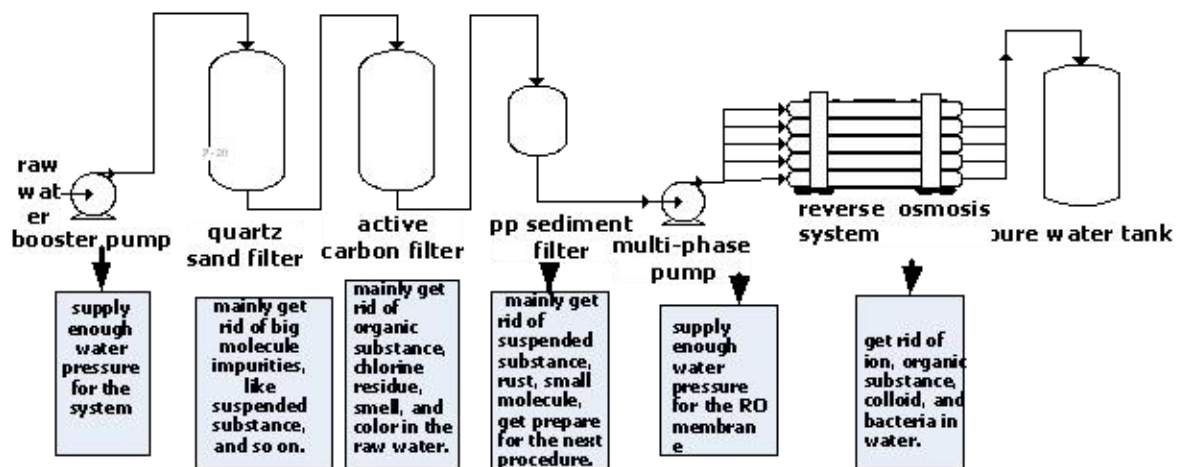

City tap water → Raw water pump → Quartz sand filter → Active Carbon filter → PP sediment filter → 2M³/h RO system → Pure water

No.	Item	No.	Item
1	Quartz sand filter	8	Flow Meter
2	Active carbon filter	9	High pressure pump
3	Pressure Meter	10	Booster pump /Chemical washing pump
4	Pressure adjustment valve	11	Chemical washing tank
5	Conductivity Meter	12	RO membrane with shell
6	Pilot lamp	13	PP filter
7	Switch	14	Start and Stop

Working Process

1. **Raw water pump**-- provide the pressure to quartz sand filter/active carbon filter
2. **Quartz Sand filter**-- get rid of turbidity, suspended matter, organic matter, colloid, ect.
3. **Active Carbon filter**--Remove the color, free chloride, organic matter, harmful matter, ect.
4. **Micron filter**--prevent large particles, bacteria, viruses into RO membrane, accuracy is 5um,
5. **High pressure pump**-- Provide the high pressure to RO membrane
6. **RO system**—main part of the plant. The RO membrane's desalting rate can reach 99%, removing over 99% ions

Performance Feature

- λ It adopts current advanced Reverse Osmosis Membrane system , the output water no kernel,pure.
- λ RO membranes auto wash and manual wash
- λ RO membranes manual wash with medicine
- λ Pure water high water level auto stop, low water level auto start
- λ Multi-phases pump protected without water
- λ Protected when no power, poor power, larger electrical current short circuit, creepage of electricity

Water Tanks and UV system and Ozone Generator





Part 2

QUOTATION FOR SMALL BOTTLE PRODUCTION LINE

- **Bottle Washing-Filling-Capping Machinery**

(including semi-automatic heat shrinking label machine)

Capacity: 2000-3000B/H

Bottle Washing + Filling + Capping + Label Packing



DESCRIPTION:

Process: Bottle Washing + Filling + Capping + Label Packing

It is a full-automatic multiple-function washing, filling and capping unit. Three parts connect with one line .It is used in washing, filling and sealing all kinds of non-air drinks such as fruit juice, oil & vinegar, wine, fruit wine, mineral water and pure water. The line has features of unique design, new style, complete functions, multi-purpose, convenient in operation, beautiful construction, high automation.

NO	PRODUCTS NAME	QTY(set)
filling machine	Air conveyor	1
	8-8-3 washing filling capping machine	1
	Cap loader	1
	Cap unscramble	1
	Light checker	1
	Conveyor	1
	Steam generator and oven to semi auto label	1

1. Air conveyor



2. 8-8-3 washing filling capping machine



Washing head



Filling heads



Capping heads

Main Feature

1. This machine has a compact structure, perfect control system, easy to operate and highly automatic degree.
2. The parts contact with product is made of quality SUS, anti-corrosive, and easy to clean.
3. By adopting high speed filling valve, the liquid level is precise and no waste. That guarantees

the demand of filling technology.

4. The capping head adopts constant torque magnetic device to guarantee capping quality and impact cap. This machine has a high efficient cap arranging system, perfect cap feeding and protection device.

5. Equipped with perfect clean management system to ensure the bottle clean. Only by changing the star-wheel, can realize to fill the changed bottle shape.

6. The machine adopts perfect overload protective device can ensure the operator and machine safe. This machine adopts adjustable frequency converter.

7. The main electric components, frequency, photoelectric switch, proximity switch, electric control valves all adopt imported components, which can ensure the quality performance.

Technical parameter

Model: 8-8-3

Production capacity: 3000b/h (basis on 500ml bottle)

Filling precision: $\leq \pm 5\text{mm}$ (liquid level)

Filling pressure: $< 0.4\text{Mpa}$

Polyester bottle specification: bottle diameter: $\phi 50\text{-}\phi 100\text{mm}$

Bottle height: 160-340mm

Suitable cap type: plastic screw cap

Water pressure of washing bottle: 0.18-0.25Mpa

Water consumption for washing bottle: 2000kg/h

Spraying position: 6

Dripping bottle position: 3.5

Gas consumption: $0.4\text{m}^3/\text{min}$

Total power: 4kw

Overall dimension: 2750×2180×2200mm

3. Conveyor





4.Label Packing Part

model	power	voltage	pressure	volume	Evaporation capacity	weight
LDR6-0.45-Z	6-9KW	AC220/380V	0.45Mpa	27L	8kg/h	84kg

Performance Characteristics

1. This machine is mounted with safety valve and safety plug which is double insurance to ensure safety in use.
2. This machine is mounted with automatic pressure controller. When the pressure value of the boiler exceeds the designed maximum, the automatic power off would work, which means the heater switch off. Once the boiler pressure value is below the designed conditions, the heater would automatically start working immediately, always to keep stable pressure for the device.
3. The boiler is mounted with not only water gauge but liquid level controller as well , it can do both filling and stop adding water, in order to keep the water level stable.
4. The boiler is made by Q235-B quality steel plate, following intermediate frequency annealing processing, hydrostatic test, X-ray detection test, to ensure its safety.



- 20W automatic laser coding machine





→ The best position for Laser Marking



Laser marking machine with ink inkjet printer comparison table				
No.	Comparison Project		Laser Marking Machine	Ink inkjet printer
1.	Performance	Security results	Print information directly marking on the product surface, can be labeled either dash dot matrix type, the visual effect is unique marking, marking a clear permanent, non-erasable and change, anti-counterfeiting effect is obvious.	Mark is clear, but easy to erase and change. Security is limited.
		Working speed	Using on-line high-speed non-stop laser printing, high production efficiency. Static can be either a high flow production line work.	Using on-line, non-stop production, higher production efficiency. But will lead to clogged ink production to a standstill. Inkjet ink flow state in the production line can work.
		Flexibility	You can print serial number, batch number, barcodes, 2D codes, logos and graphics. Print the number of lines and the font size is unlimited.	You can print bar codes, batch numbers and simple patterns, etc., print the number of rows and font size is restricted.
		Reliability	Stable and reliable performance, all-weather continuous work, maintenance-free for a long time. Minimal maintenance, provide you with the longest uptime. By the environmental impact.	Performance basically stable, but relatively high failure rate. Due to environmental changes in temperature, humidity and dust and clogging the nozzle. Maintenance workload. At lower temperatures, and dust is large, the failure rate dramatically.
2.	Operating Installation	Use	Intuitive Windows software (Windows),display interface, high resolution, clear picture quality. Makes creating and editing print information easily and quickly.	Display interface is simple, low resolution. Print information only for simple editing process.
		Installation	Compact, lightweight chassis, the smallest and lightest laser print head can be installed directly on the production line, suitable for any production space.	Moderate size, but some models still need an external air compressor and other external devices.
3.	Fee	Initial cost	One-time purchase price is higher.	One-time purchase price is lower.
		Operating costs	Low running costs, eliminate unplanned shutdown, the device long-term maintenance-free operation, no special maintenance, without any consumables, non-polluting.	Consume a lot of special inks and solvents, supplies a large amount. Also, replace the nozzle and other accessories costly, require specialized maintenance personnel, but also unplanned shutdown, resulting in indirect losses.
4.	Data processing		Direct use of industrial computer control console, with powerful data processing capabilities, can be connected to all the security data systems to meet the needs of multi-level security.	Using SCM control, data processing capacity is limited, security features much.
5.	Environmentally safe		On the environment and does not	Inks and solvents are highly volatile

		produce any harmful substances, and no damage to the object to be printed, is environmentally friendly high-tech products. In the food, pharmaceutical production have been widely used.	substances, will produce more toxic chemical residues and environmental pollution. In addition, the chemical composition of inks and solvents and odors entirely possible infiltration by marking objects. Is internationally gradually replace the product.
--	--	--	--

● Shrink Wrapping Packing Machine

Technical data:

Name and specifications	REMARK	Machine sample
PE shrink packing machine Model : 500x400mm Convey speed : 0-10 m/min. Temperature: normal to 250℃ (adjustable) The size of Tunnel: 1600x500x400 mm Machine size : 3100x850x1200 mm Shrink film : PE, PP, PVC, POF Power supply : three phase, four lines Power : 13-15KW Machine weight : 500KG	Shrink packing machine is the latest auto-shrink packaging machine at currently, use of far infrared for heating (power-saving 15% or more), the temperature and the trans speed is stability adjustable, and the temperature is show by instrumentation. The needle carrier to rotate, in order to ensure the products uniform heating	





Part 3

QUOTATION FOR BOTTLE BLOWING

1. 1000BPH small bottle blowing machine

Capacity: 800-1200PCS/H



Bottle Sample Made by This Machine

Item	Specification	Quantity
------	---------------	----------

JM-I bottle blowing machine main body	10KW	220V/ 50-60 HZ	1 sets
Infrared oven		380V/50-60HZ	1 set
1.0/30bar high pressure air compressor	11KW 380V/HZ 50-60		1 set
Air filter	1.0/30bar		1 set
Mold	2 cavity		2 sets

Technical parameters of bottle blowing machine:

Name	Item	Unit	Details
Blowing machine	Dimension	mm	1700*750*1710mm
	Weight	kg	600
	Bottle volume (max)	ml	7000
	Bottle volume (min)	ml	100
	Bottle Neck Diameter (max)	mm	120
	Bottle Neck Diameter (min)	mm	18
	Body Diameter (max)	mm	220
	Body Height(max)	mm	520
	Number of Cavities	mold	2
	Production output	pcs/h	800-1200BPH
	Clamping force	T	5.7 (57KN)
	Mold thickness	mm	300 (max)
	Mold width	mm	460x490
	Space between Tie-bars	mm	120-220
	Diameter of Tie-bars	mm	63
	Scope of Tie-bars	mm	405
	Mold stroke	mm	160
	Stretching stroke (max)	mm	520
	Working pressure	Mpa	0.8-1.0Mpa
	Blowing pressure	Mpa	2.0-3.0Mpa
	Voltage/Power	V/KW	220V/10KW
	Weight	Kg	500
Pre-heater	Dimension	mm	1870*630*1450mm
	Weight	kg	280
	Voltage/Power	V/KW	380V/14KW



1 year spare parts for free

Free spare parts list:

Items	Quantity	Unit
One package of PVC pipes and valves	/	Package
PP filter	1	set
Plastic sealing rings	1	set
Residual chlorine testing liquid	1	set
Pressure adjust handle	1	set
Plastic cover of PP filter	1	set
Fuse	1	set
Manual book	1	set
Certification	1	set

WEARING PARTS

NORMALLY, WE SEND ONE YEAR'S WEARING PART TO YOU FOR FREE. FOR THE OTHER YEARS, YOU CAN ORDER THEM FROM YOUR PLACE OR FROM US.

Items	QUARTZ SAND	CARBON	PP FILTER	RO Membrane
Photos				
Working hour	4360H	1440H	720H	3990H

MORE DETAIL PHOTOS:



FLOW METER



SS304 HOUSING
MEMBRANE



SS304 VALVE




ELECTRICAL CONTROL
PANEL



SS304 PIPES

Pictures of Our Factory and Products

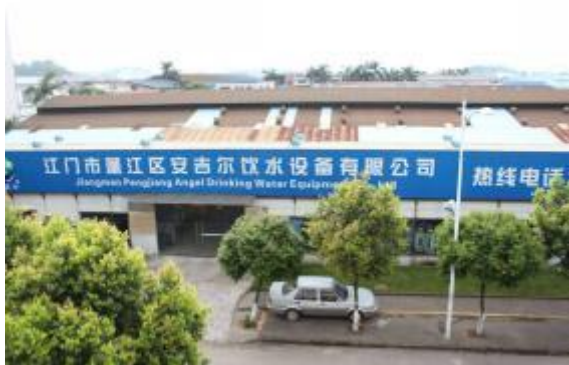

Old factory



New building



Company team



Clients in our factory during my 10 years experience





Packing and Loading



Our Projects



Malaysia 4000B/H line



Tanzania 10000B/H line



Libya 1500B/H line



Somalia 5000B/H line



Korea 8000B/H line



India 5000B/H line



江门市蓬江区安吉尔饮水设备有限公司
Jiangmen Pengjiang Angel Drinking Water Equipment Co., Ltd

