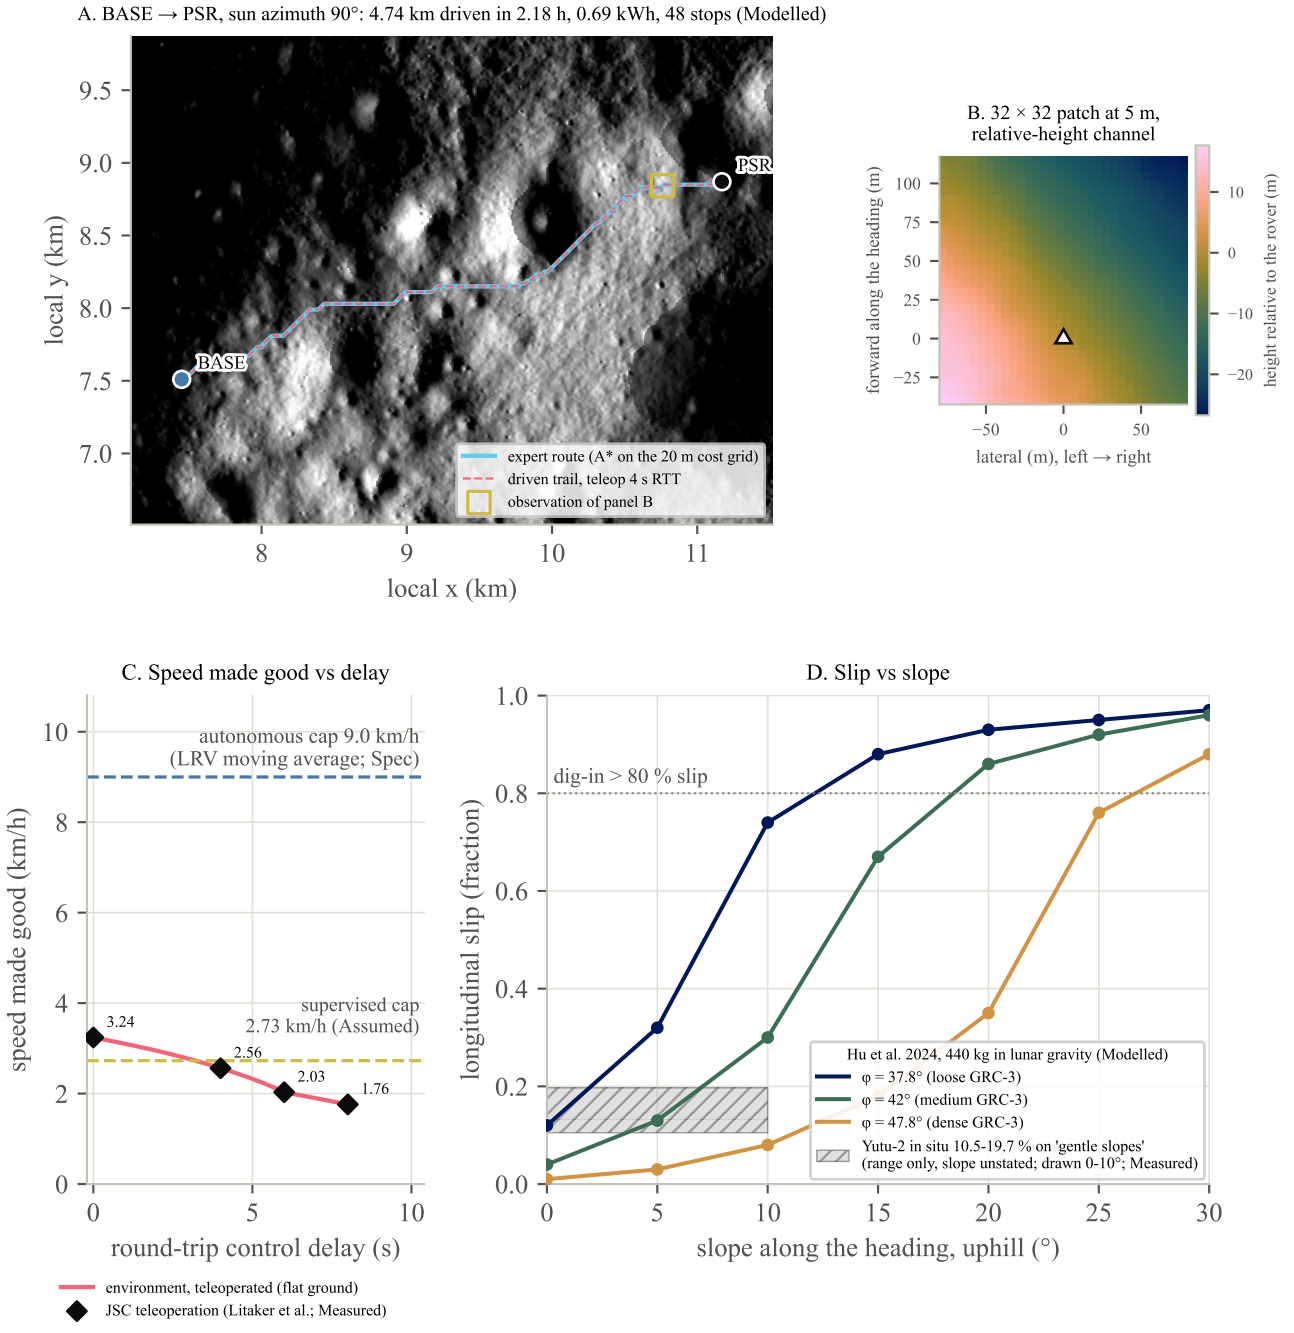

A. BASE → PSR, sun azimuth 90°: 4.74 km driven in 2.18 h, 0.69 kWh, 48 stops (Modelled)
local y (km)
local x (km)
BASE
PSR
expert route (A* on the 20 m cost grid)
driven trail, teleop 4 s RTT
observation of panel B
B. 32 × 32 patch at 5 m,
relative-height channel
forward along the heading (m)
lateral (m), left → right
height relative to the rover (m)
C. Speed made good vs delay
autonomous cap 9.0 km/h
(LRV moving average; Spec)
supervised cap
2.73 km/h (Assumed)
3.24
2.56
2.03
1.76
speed made good (km/h)
round-trip control delay (s)
environment, teleoperated (flat ground)
JSC teleoperation (Litaker et al.; Measured)
D. Slip vs slope
dig-in > 80 % slip
longitudinal slip (fraction)
slope along the heading, uphill (°)
Hu et al. 2024, 440 kg in lunar gravity (Modelled)
φ = 37.8° (loose GRC-3)
φ = 42° (medium GRC-3)
φ = 47.8° (dense GRC-3)
Yutu-2 in situ 10.5-19.7 % on 'gentle slopes'
(range only, slope unstated; drawn 0-10°; Measured)