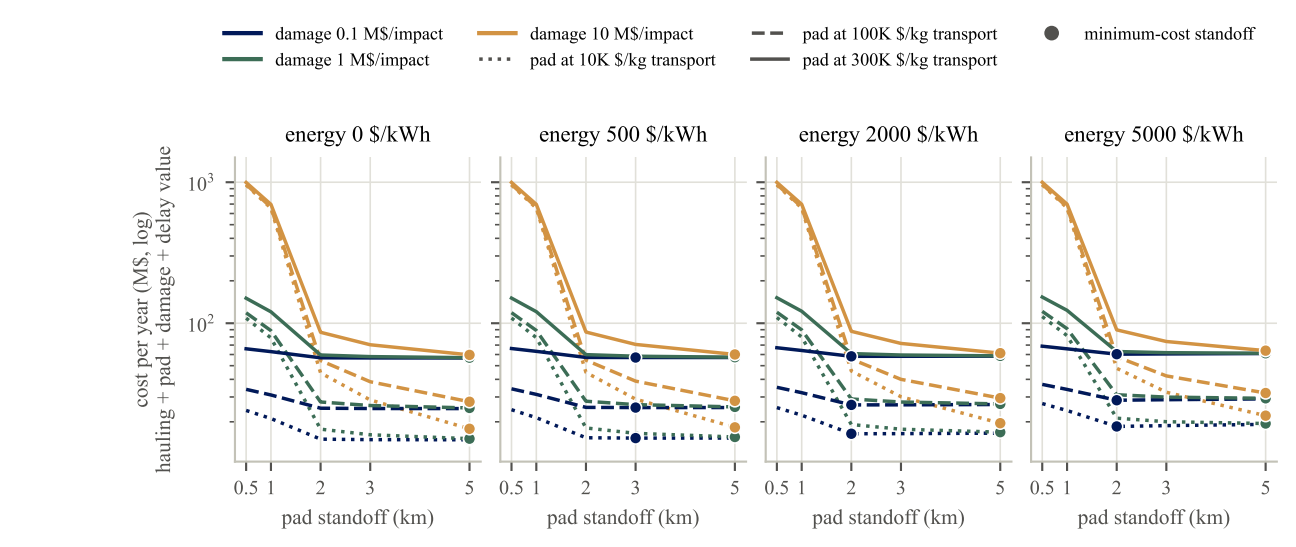
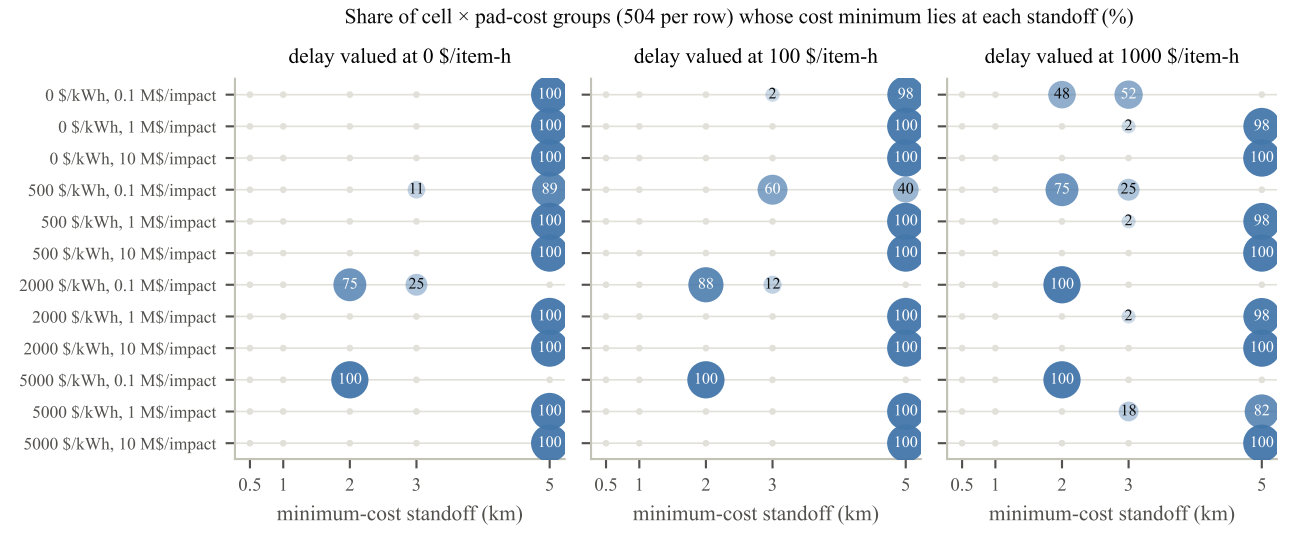

damage 0.1 M$/impact
damage 1 M$/impact
damage 10 M$/impact
pad at 10K $/kg transport
pad at 100K $/kg transport
pad at 300K $/kg transport
minimum-cost standoff
energy 0 $/kWh
energy 500 $/kWh
energy 2000 $/kWh
energy 5000 $/kWh
cost per year (M$, log)
hauling + pad + damage + delay value
$10^3$
$10^2$
0.5 1 2 3 5
pad standoff (km)


Share of cell × pad-cost groups (504 per row) whose cost minimum lies at each standoff (%)
delay valued at 0 $/item-h
delay valued at 100 $/item-h
delay valued at 1000 $/item-h
0 $/kWh, 0.1 M$/impact
0 $/kWh, 1 M$/impact
0 $/kWh, 10 M$/impact
500 $/kWh, 0.1 M$/impact
500 $/kWh, 1 M$/impact
500 $/kWh, 10 M$/impact
2000 $/kWh, 0.1 M$/impact
2000 $/kWh, 1 M$/impact
2000 $/kWh, 10 M$/impact
5000 $/kWh, 0.1 M$/impact
5000 $/kWh, 1 M$/impact
5000 $/kWh, 10 M$/impact
0.5 1 2 3 5
minimum-cost standoff (km)