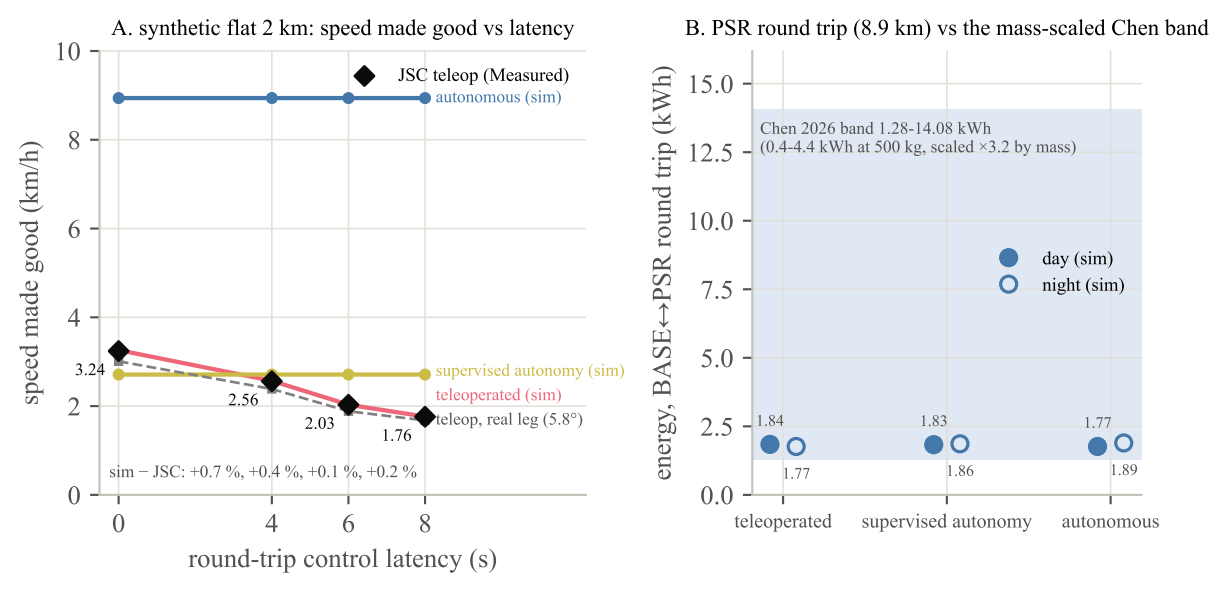
A. synthetic flat 2 km: speed made good vs latency
JSC teleop (Measured)
autonomous (sim)
supervised autonomy (sim)
teleoperated (sim)
teleop, real leg (5.8°)
3.24
2.56
2.03
1.76
sim − JSC: +0.7 %, +0.4 %, +0.1 %, +0.2 %
speed made good (km/h)
round-trip control latency (s)
0
2
4
6
8
10
B. PSR round trip (8.9 km) vs the mass-scaled Chen band
Chen 2026 band 1.28-14.08 kWh
(0.4-4.4 kWh at 500 kg, scaled ×3.2 by mass)
day (sim)
night (sim)
1.84
1.77
1.83
1.86
1.77
1.89
energy, BASE↔PSR round trip (kWh)
0.0
2.5
5.0
7.5
10.0
12.5
15.0
teleoperated
supervised autonomy
autonomous