


Static Routing Using Packet Tracer

Instructions:

1. Configure the following topology using Dynamic Routing.
2. Test your connection to see, if all the subnets can transfer packets among them.

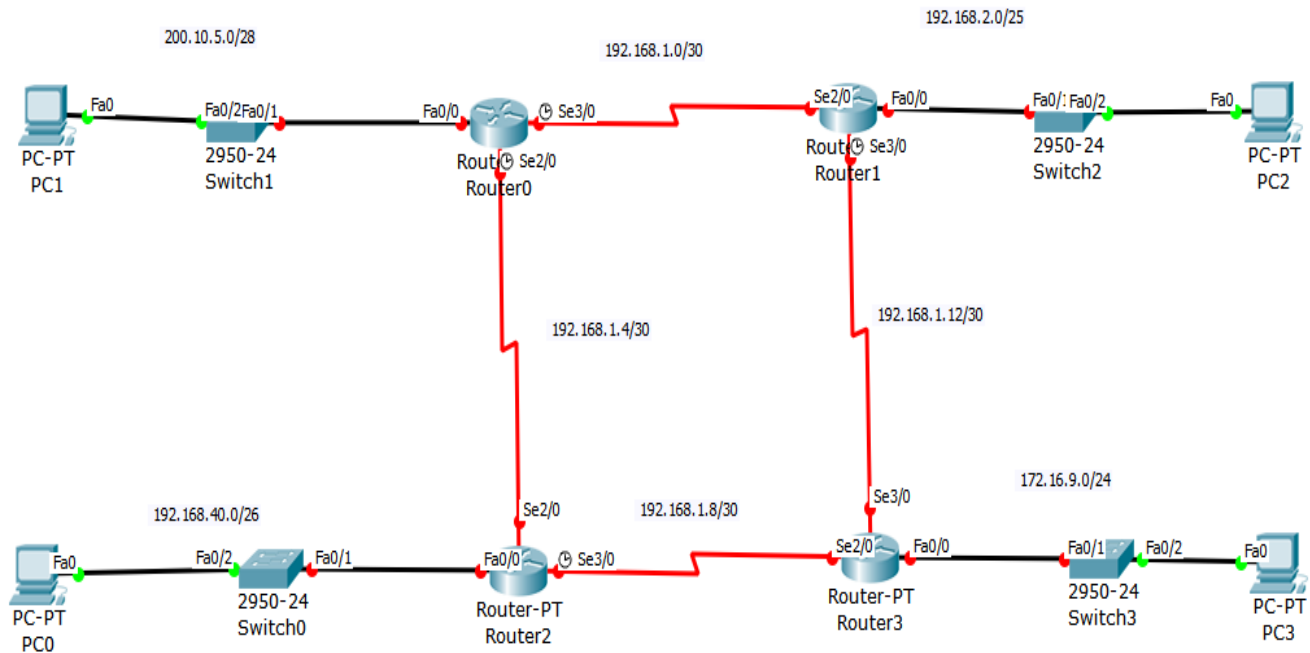

Task 1: Addressing Table

Device	Interface	IP address	Subnet Mask
Router0	Fa 0/0		
	Serial 2/0		
	Serial 3/0		
Router1	Fa 0/0		
	Serial 2/0		
	Serial 3/0		
Router2	Fa 0/0		
	Serial 2/0		
	Serial 3/0		

Router3	Fa 0/0		
	Serial 2/0		
	Serial 3/0		

Task 2: Subnet Information

Subnet Number	Subnet Address	First Usable Host Address	Last Usable Host Address	Gateway Address
1				
2				
3				
4				
5				
6				
7				
8				