


a Two ways to vary one setting; only one of them retrains the estimator

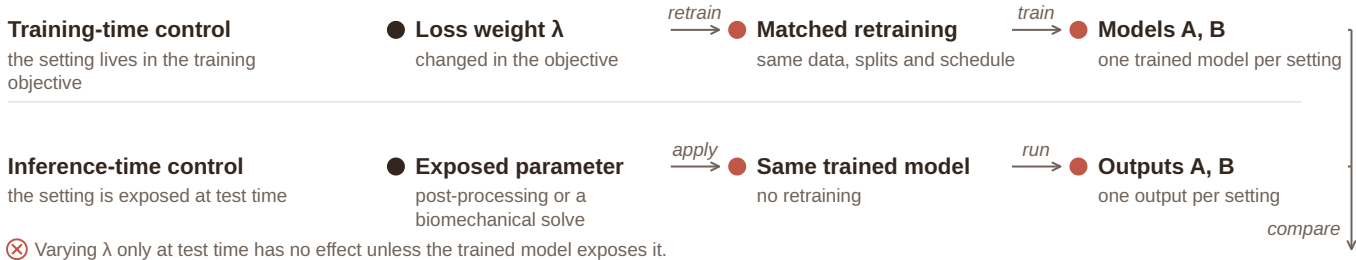

b Both routes are compared under one held-out evaluation contract

✓ held-out cases

final test cases kept out of model, hyperparameter and rule selection

✓ same estimand

one definition of the reported strain

✓ same reference

one material-sensitive or known-motion reference

✓ attribute-specific losses

magnitude, location, extent, timing, field validity

● control setting

● estimator state