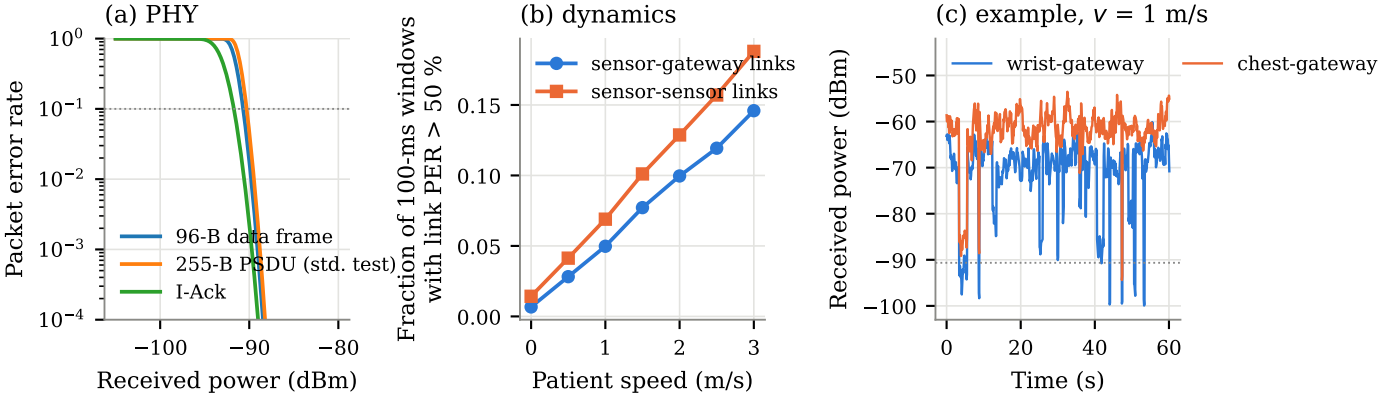
(a) PHY
Packet error rate
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{-4}
96-B data frame
255-B PSDU (std. test)
I-Ack
−100
−90
−80
Received power (dBm)
(b) dynamics
Fraction of 100-ms windows with link PER > 50 %
sensor-gateway links
sensor-sensor links
0.00
0.05
0.10
0.15
0
1
2
3
Patient speed (m/s)
(c) example, v = 1 m/s
Received power (dBm)
wrist-gateway
chest-gateway
−50
−60
−70
−80
−90
−100
0
20
40
60
Time (s)