

ANTIBACTERIAL AND ANTI SKIDDING
WEARPROOF AND ANTIFOULING
ENVIRONMENTAL PROTECTION



ANDES HOMOGENEOUS

STRENGTHEN POLYURETHANE SHEET


HOMOGENEOUS FLOOR
STRENGTHEN POLYURETHANE SHEET

ANDES

2.0T

Wolfloor®
flooring expert

- Durable, with fewer fillers than the industry standard to provide superior resistance to heavy traffic abrasion, from permanent equipment to wheeled traffic and hospital beds.
- No wax maintenance protocol with PUR™ surface treatment.
- Naturally bacteriostatic to help stop the spread of common hospital acquired infections.
- Matte, non-glaring surface recommended in healthcare applications.
- Lightweight, flexible homogeneous flooring makes for easy installation, coving, skirting, and welding.
- True colors that never fade and keep their original tone.

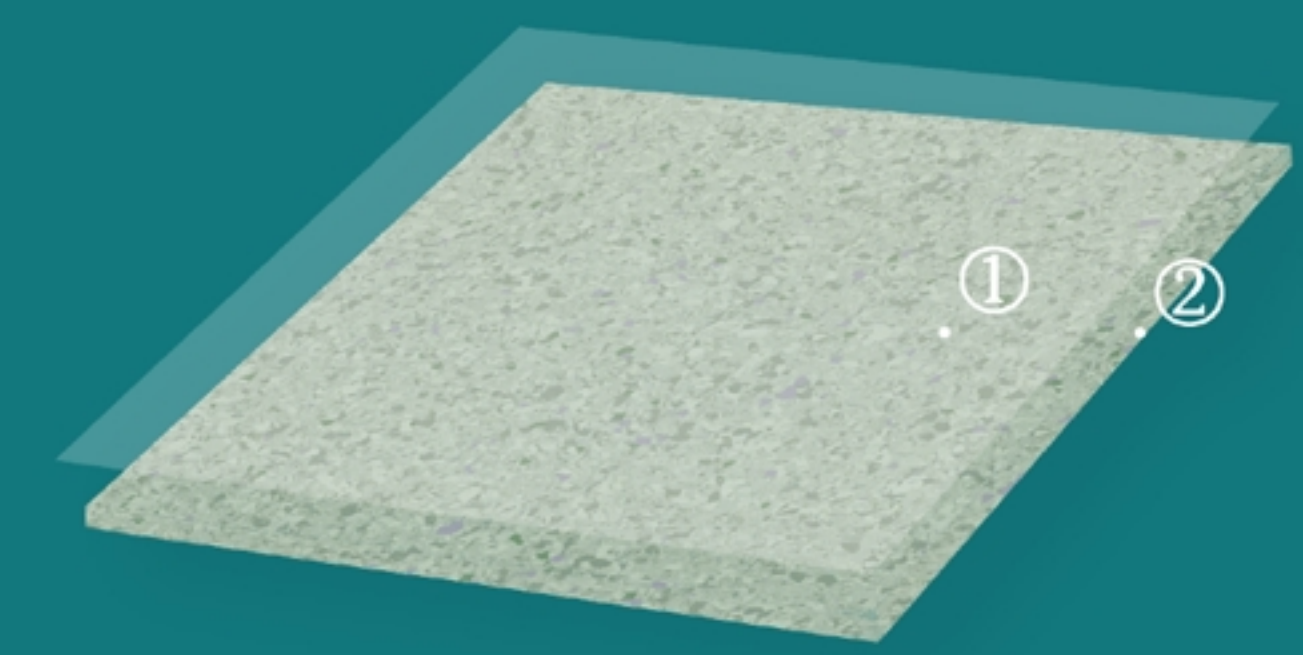


① PUR™ surface treatment

② 2mm compacted homogeneous layer




Wolfloor®
Flooring expert

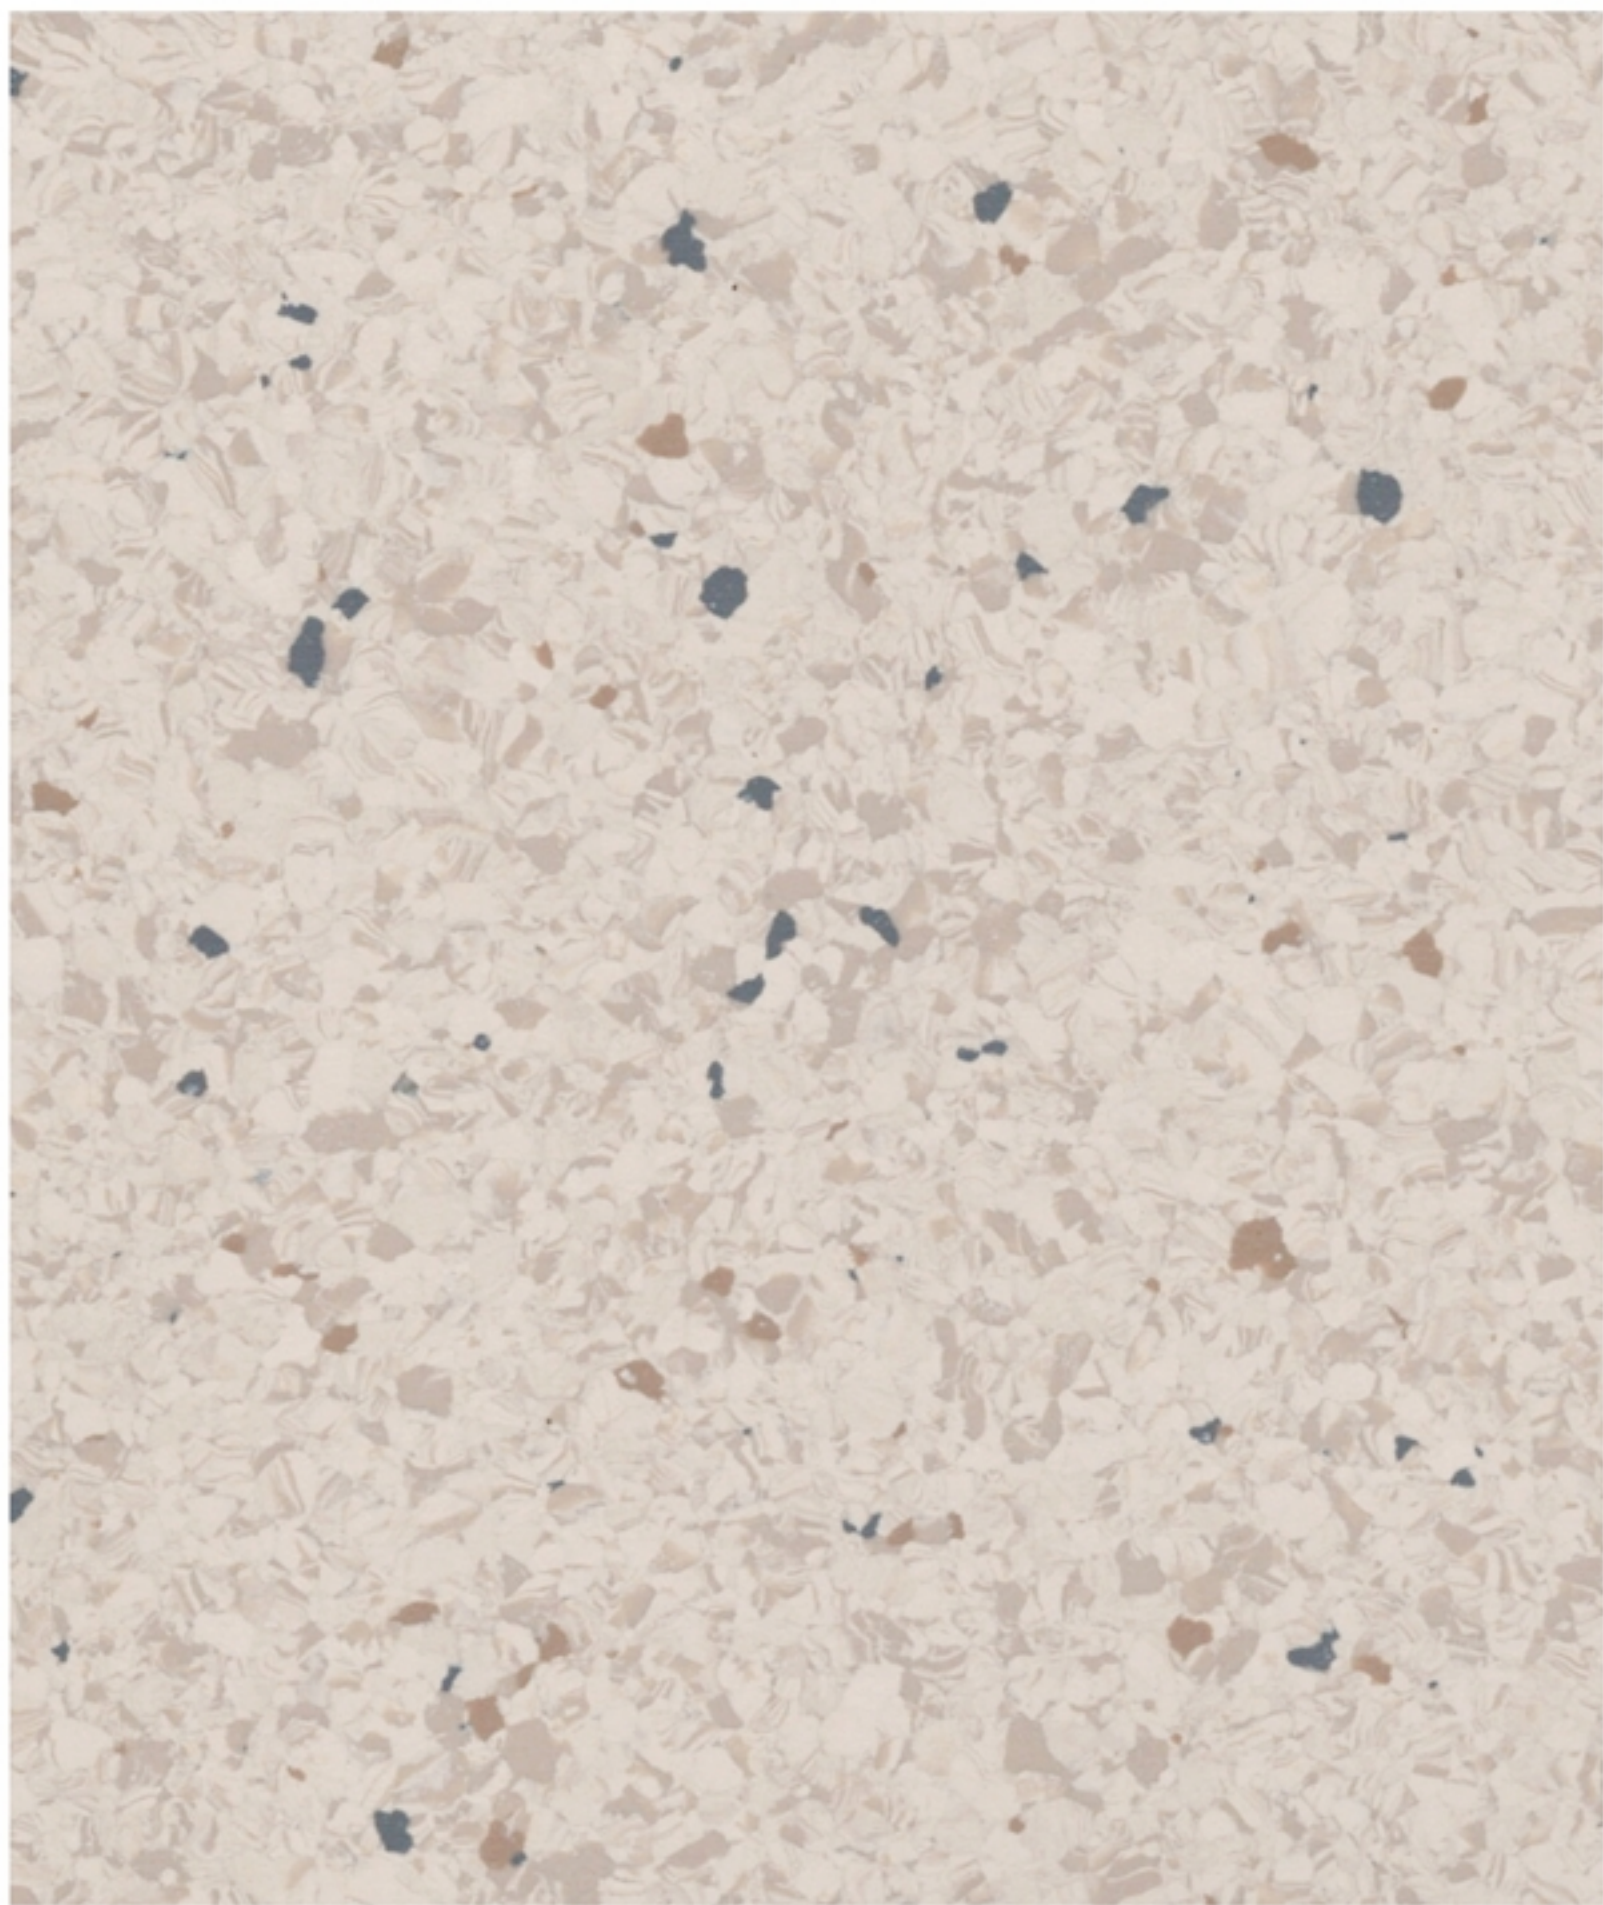


@ WL91 678




@ WL91 651

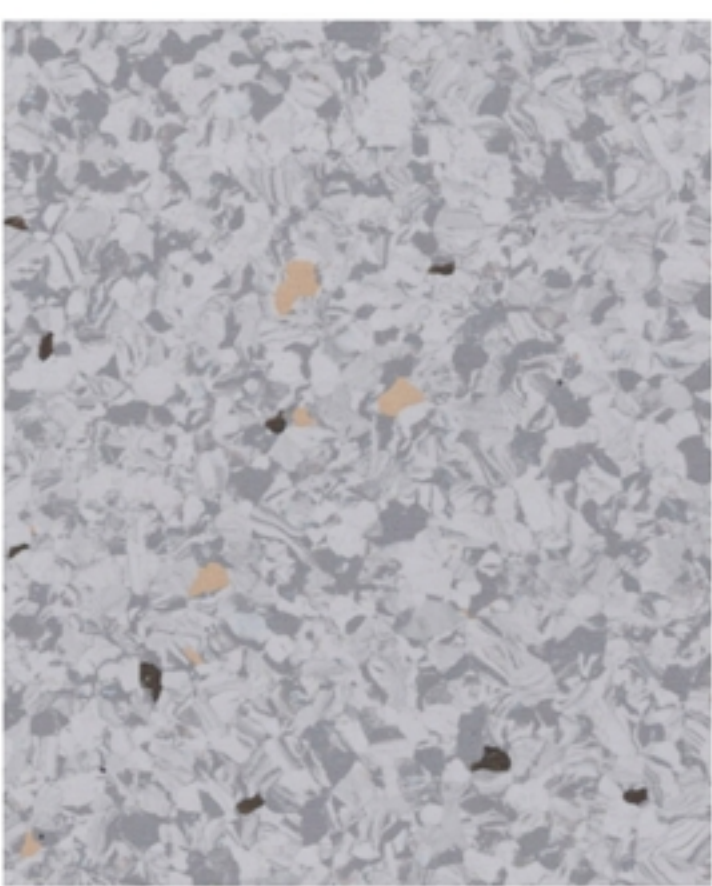

@ WL91 652

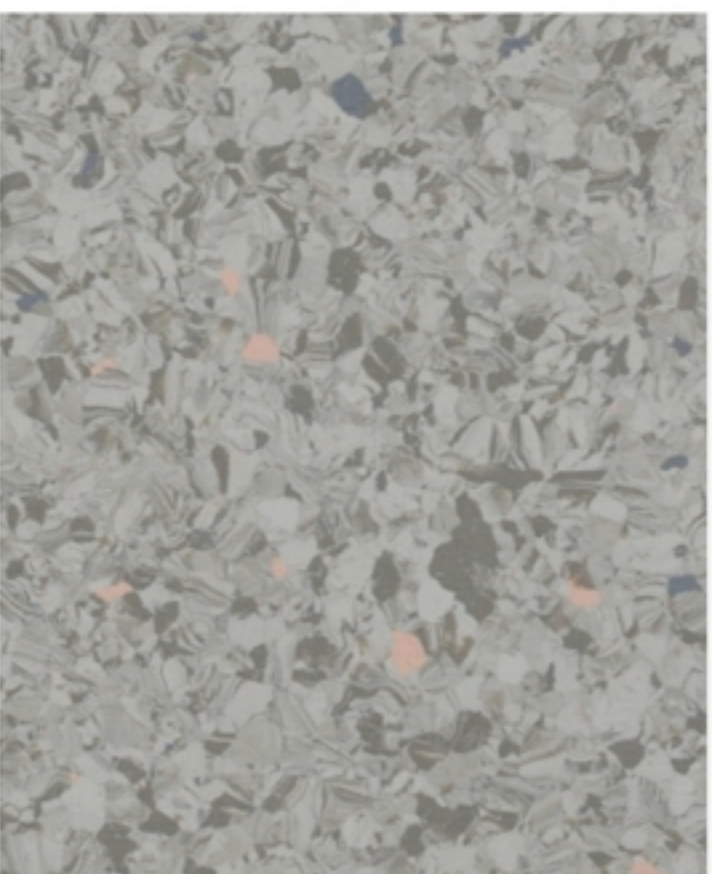

@ WL91 600

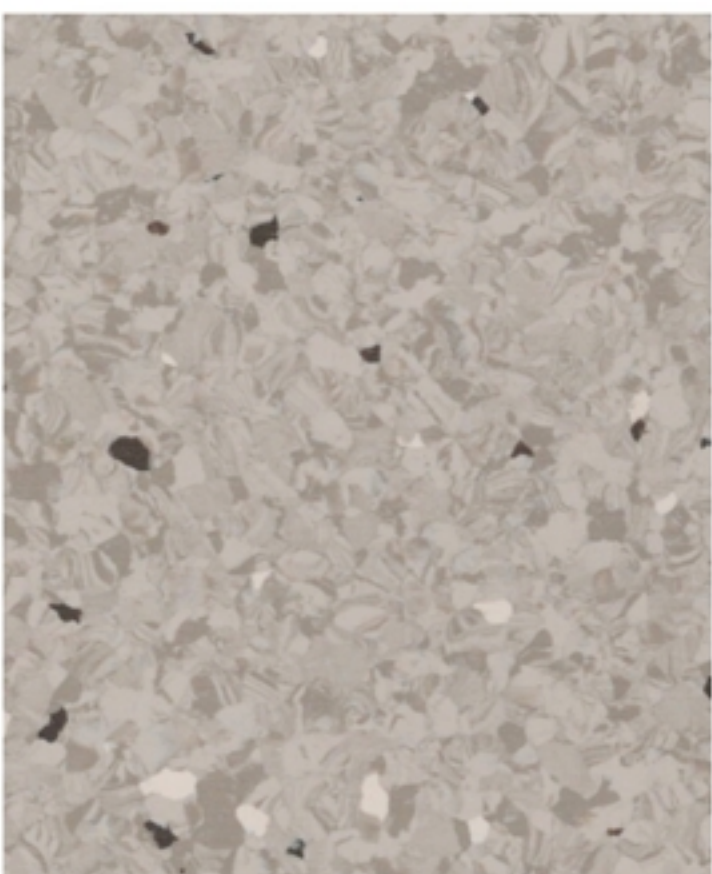

@ WL91 655




@ WL91 675




@ WL91 657




@ WL91 658

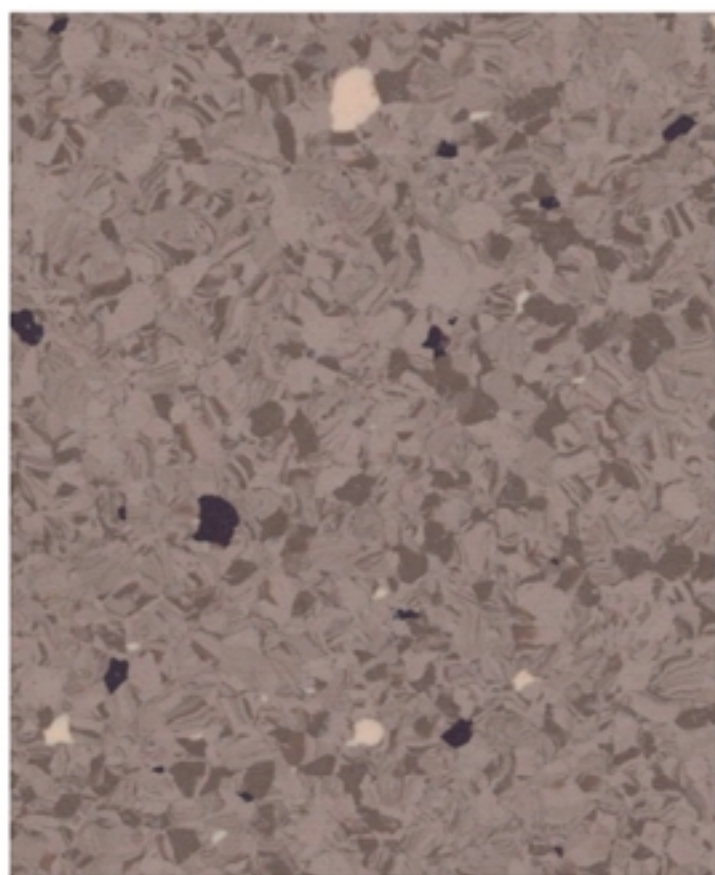


@ WL91 625

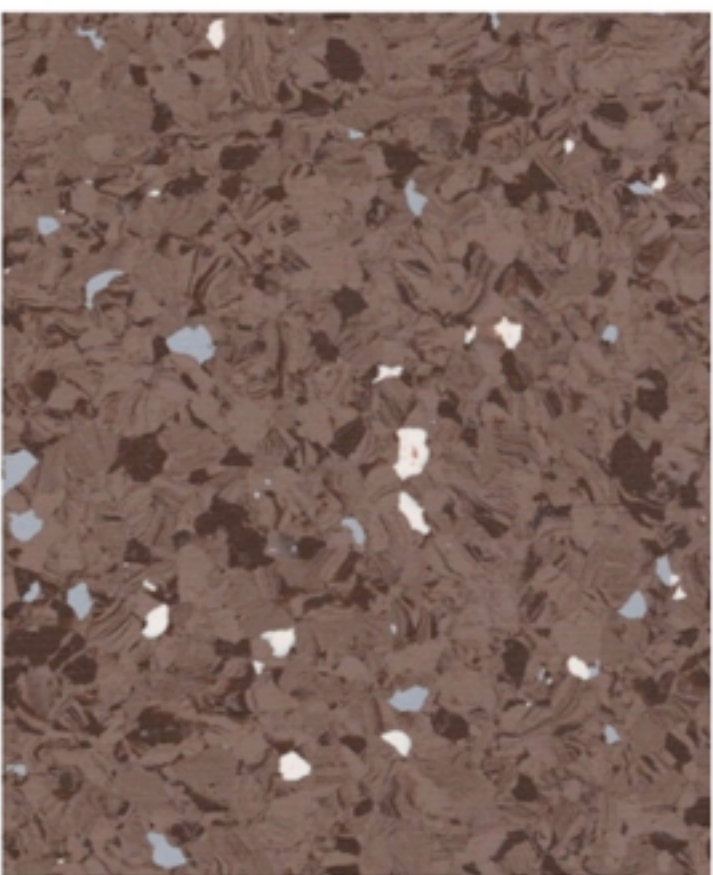


@ WL91 676

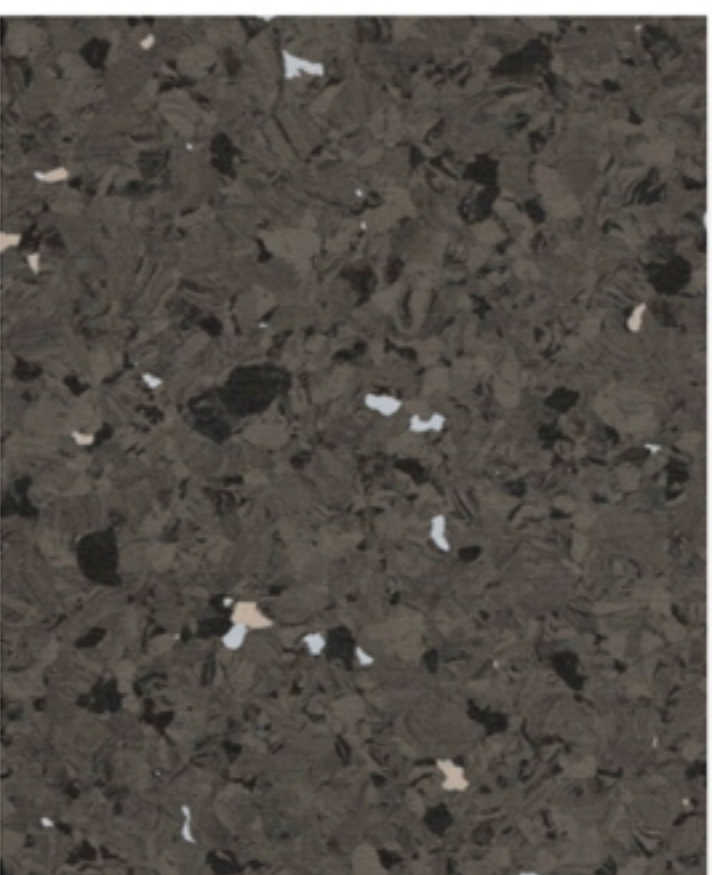


@ WL91 656

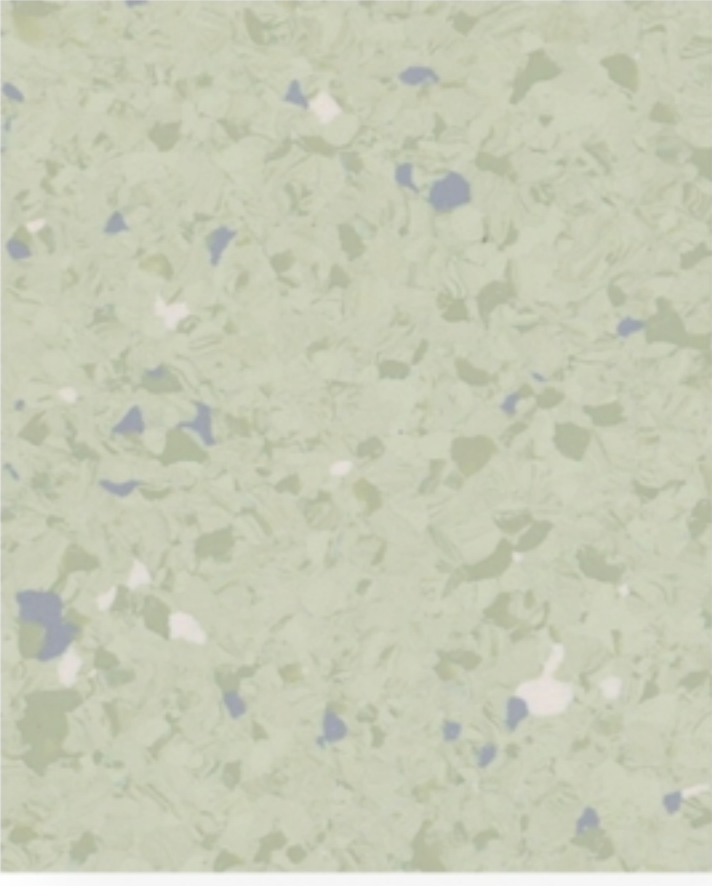


@ WL91 640

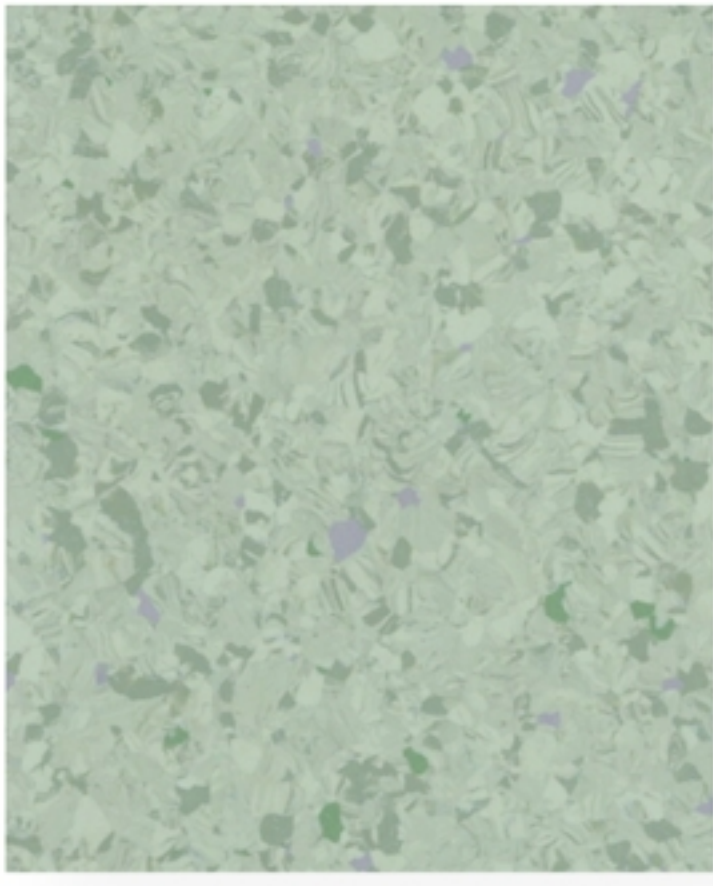


@ WL91 679

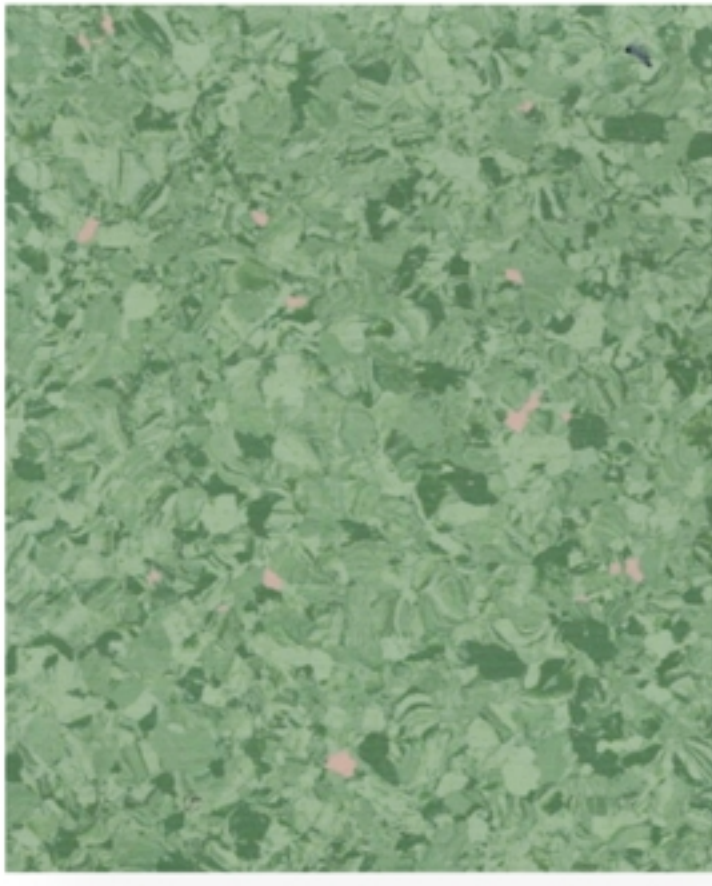


@ WL91 680

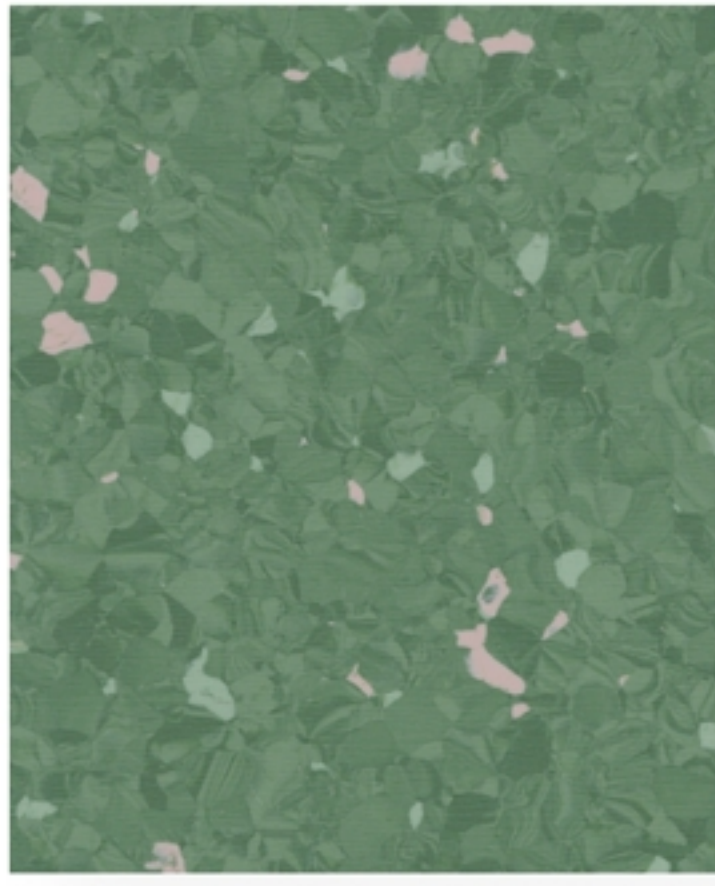


@ WL91 681

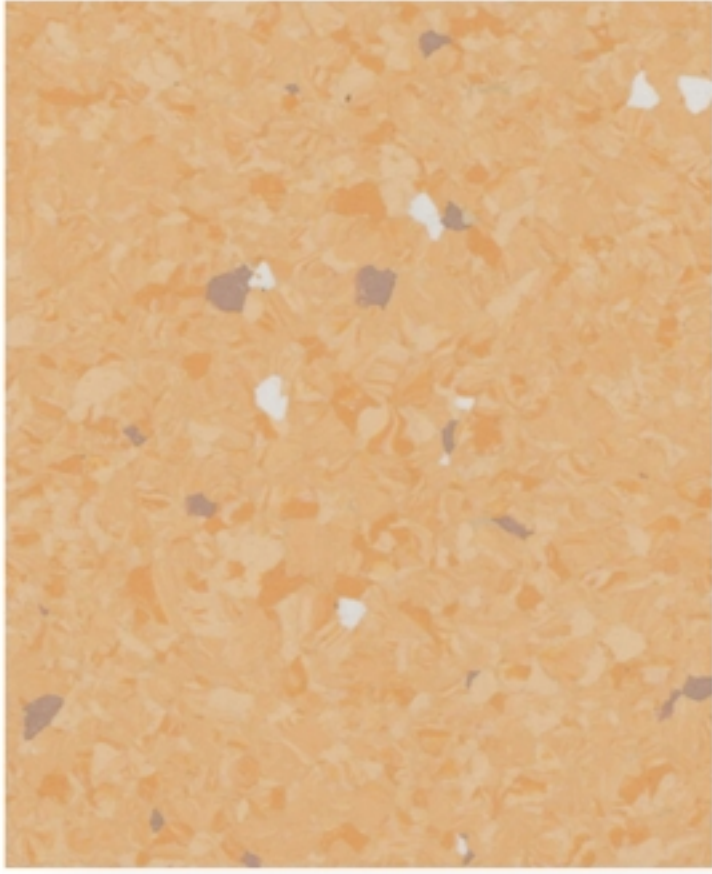


@ WL91 661

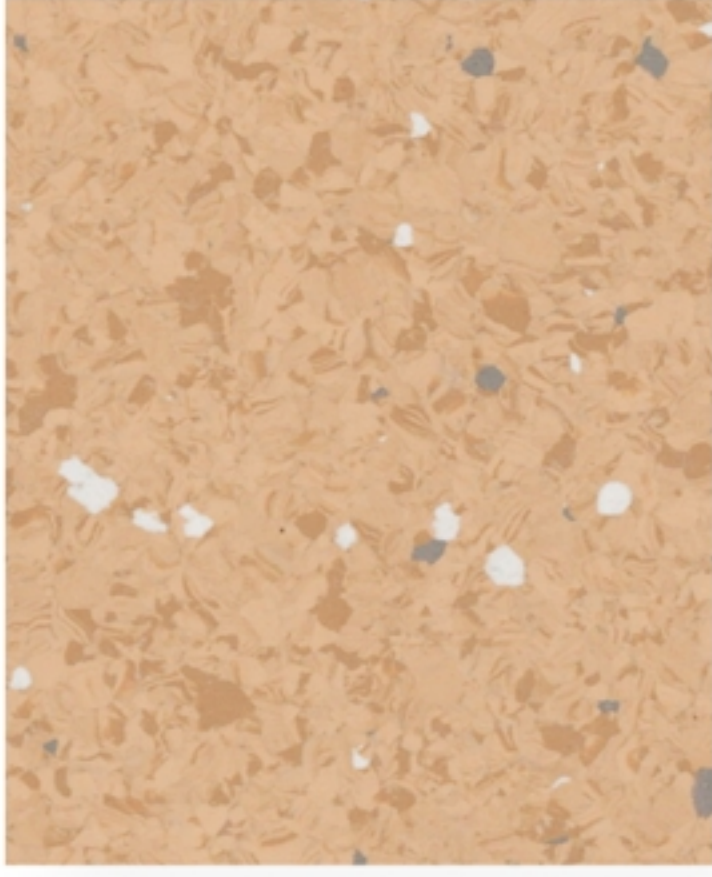


@ WL91 664

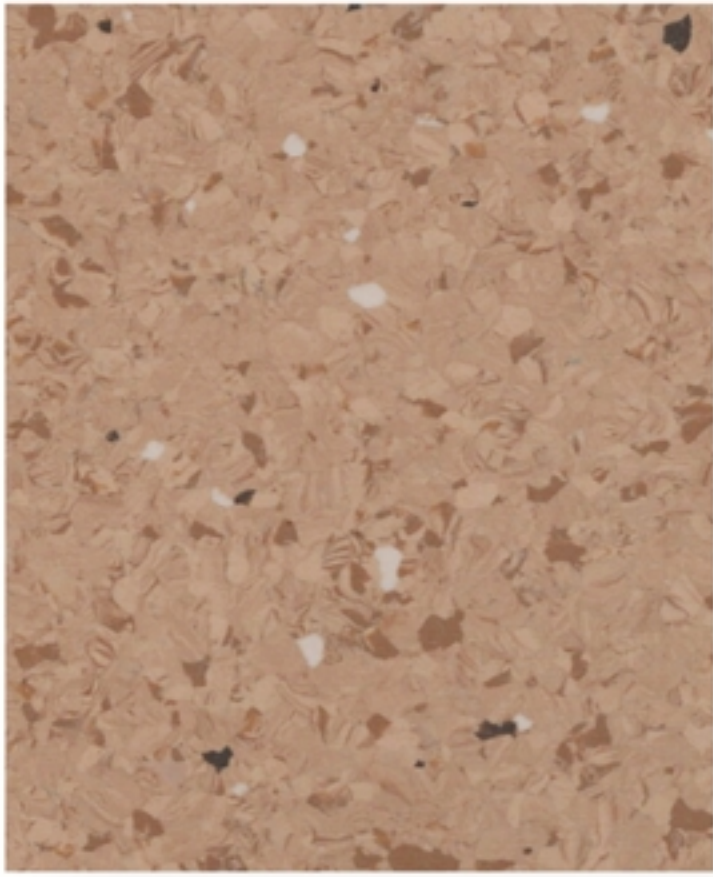


@ WL91 659

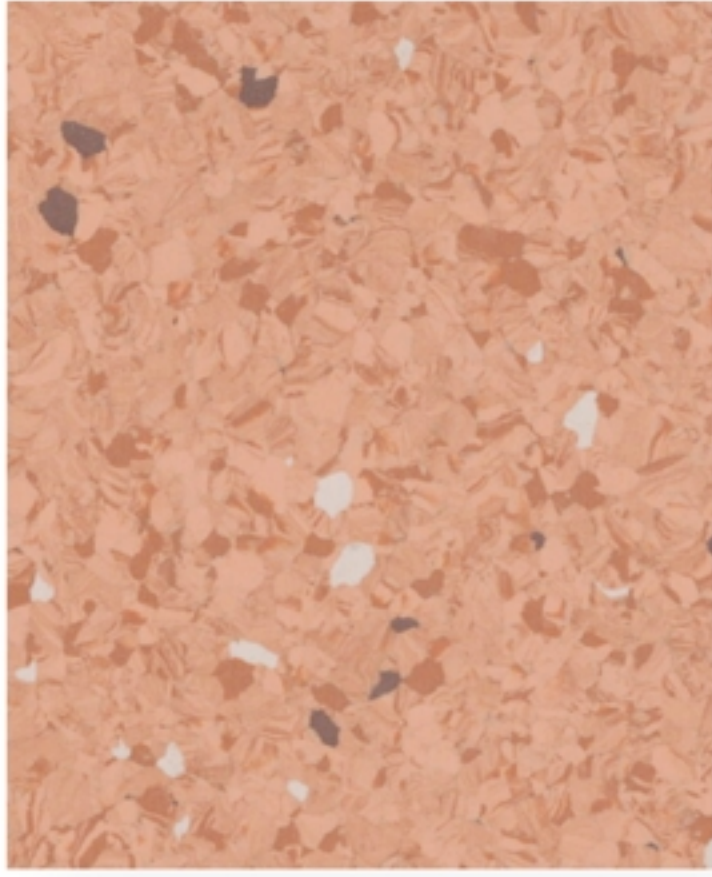


@ WL91 667

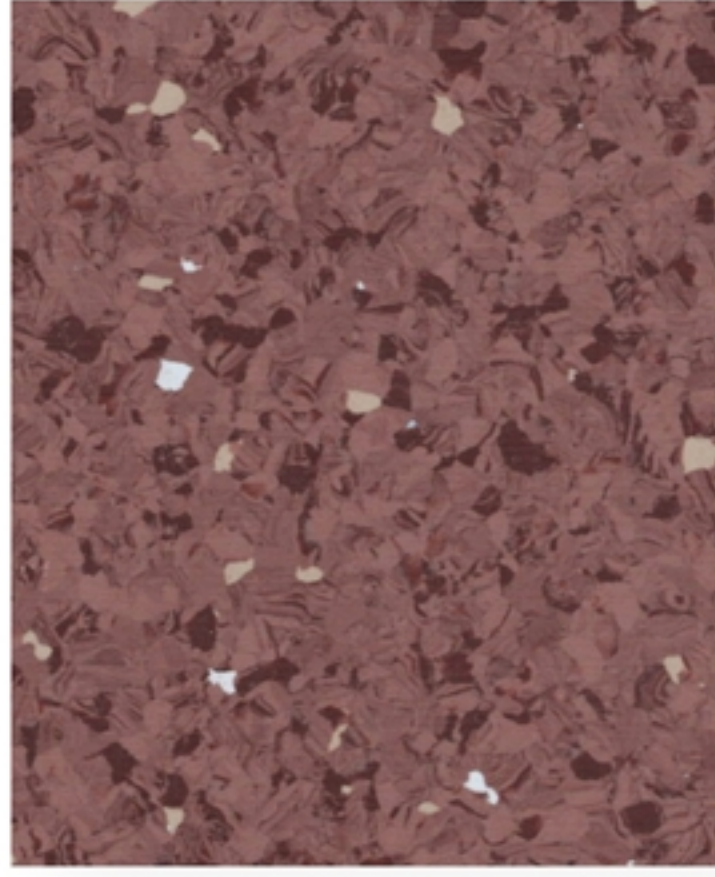


@ WL91 632

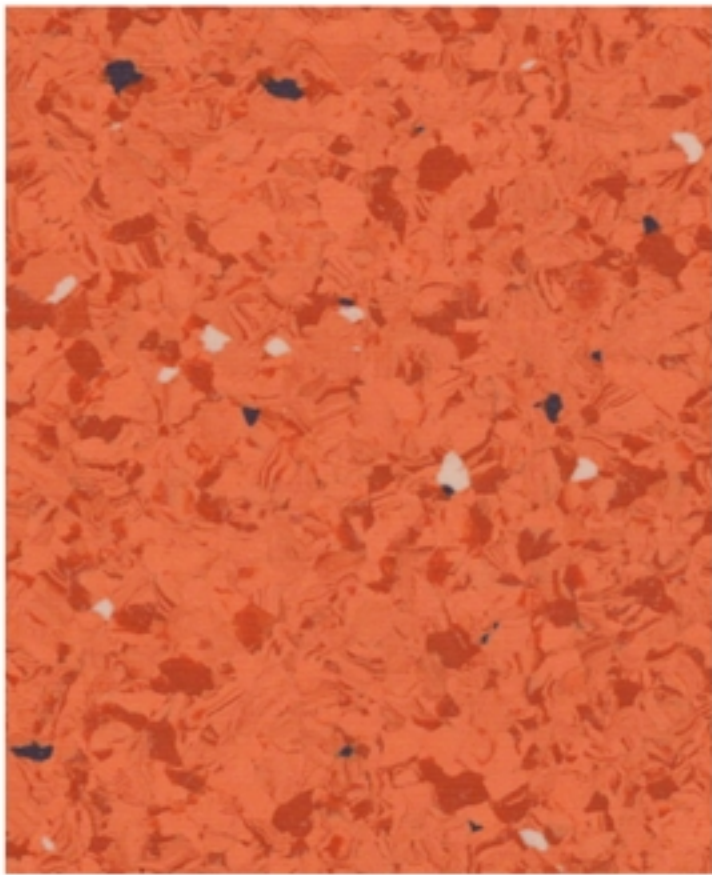


@ WL91 641

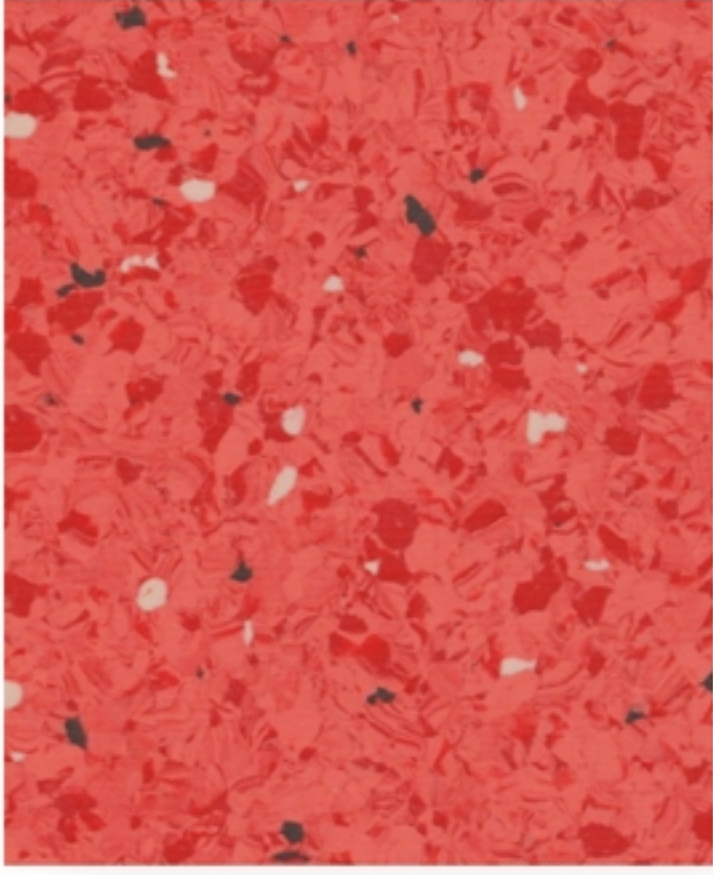


@ WL91 653

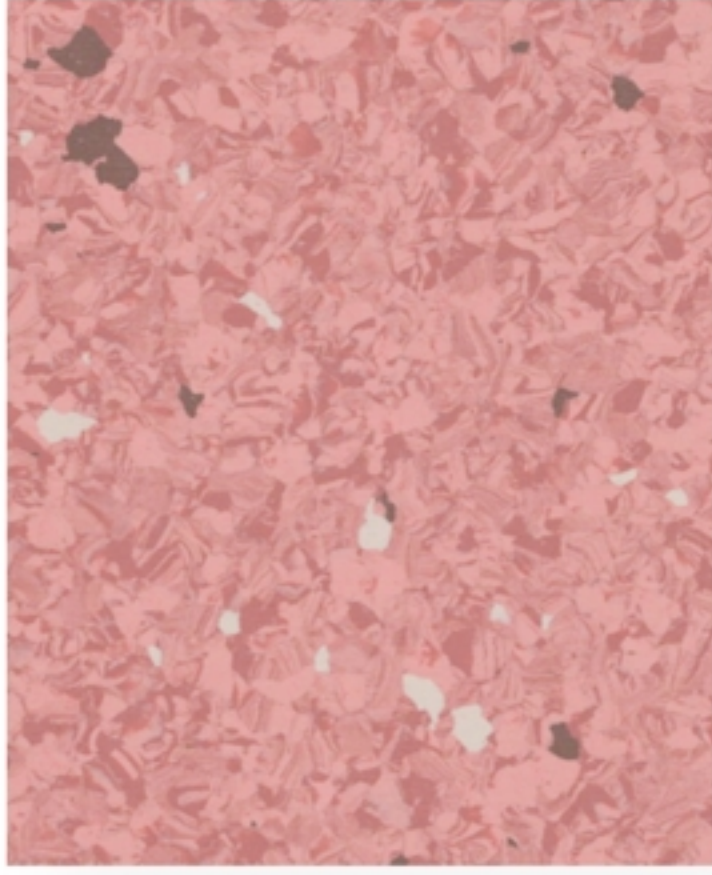


@ WL91 668

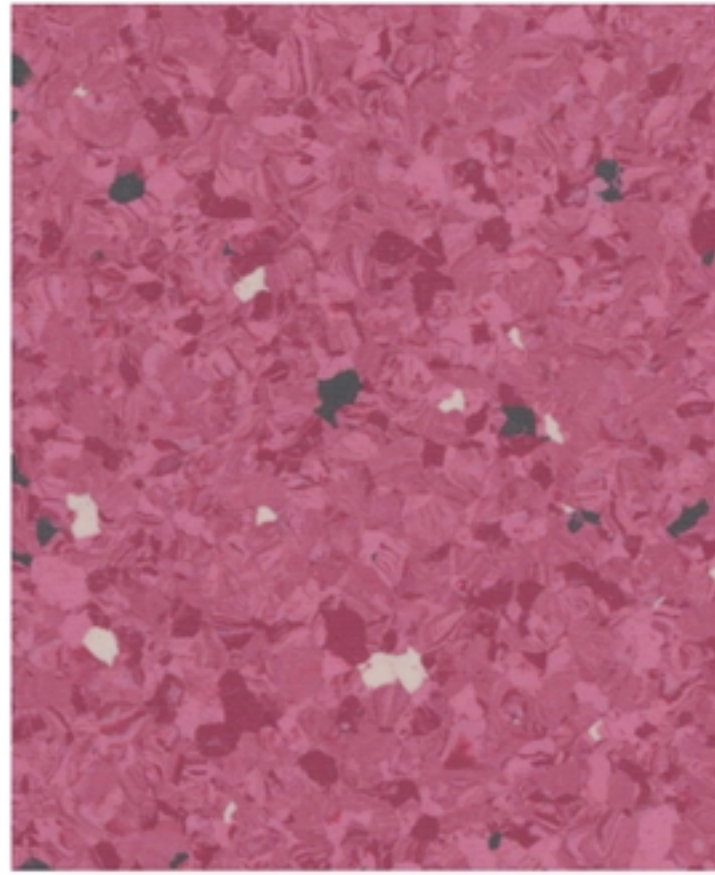


@ WL91 663

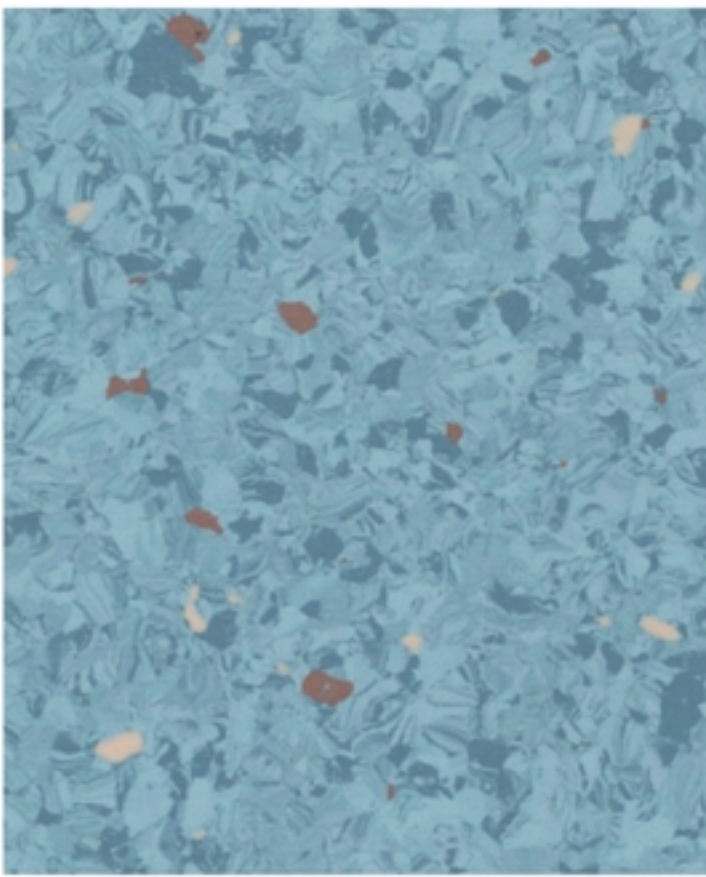


@ WL91 638

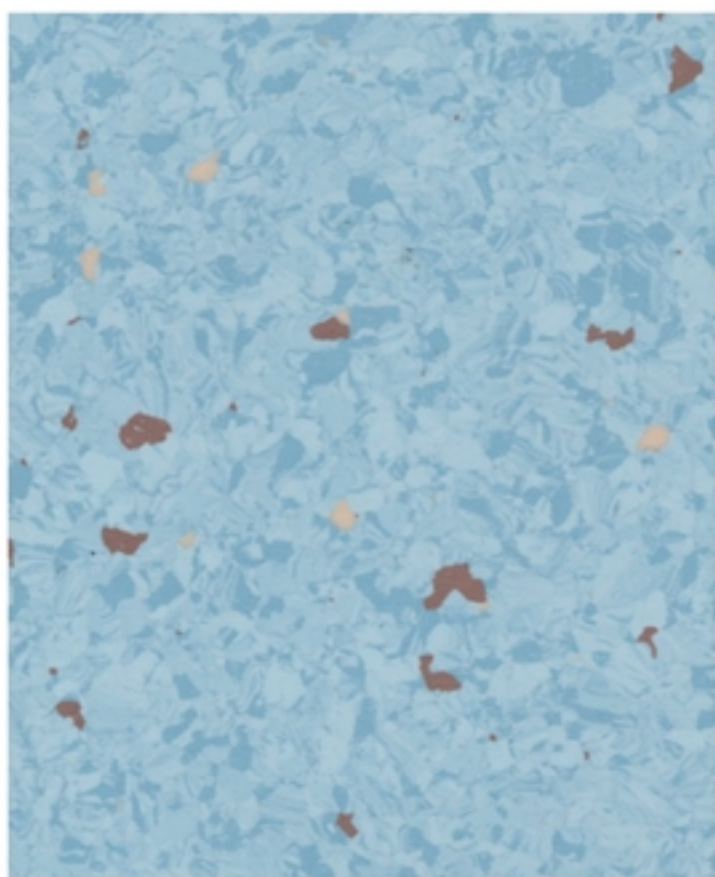


@ WL91 639

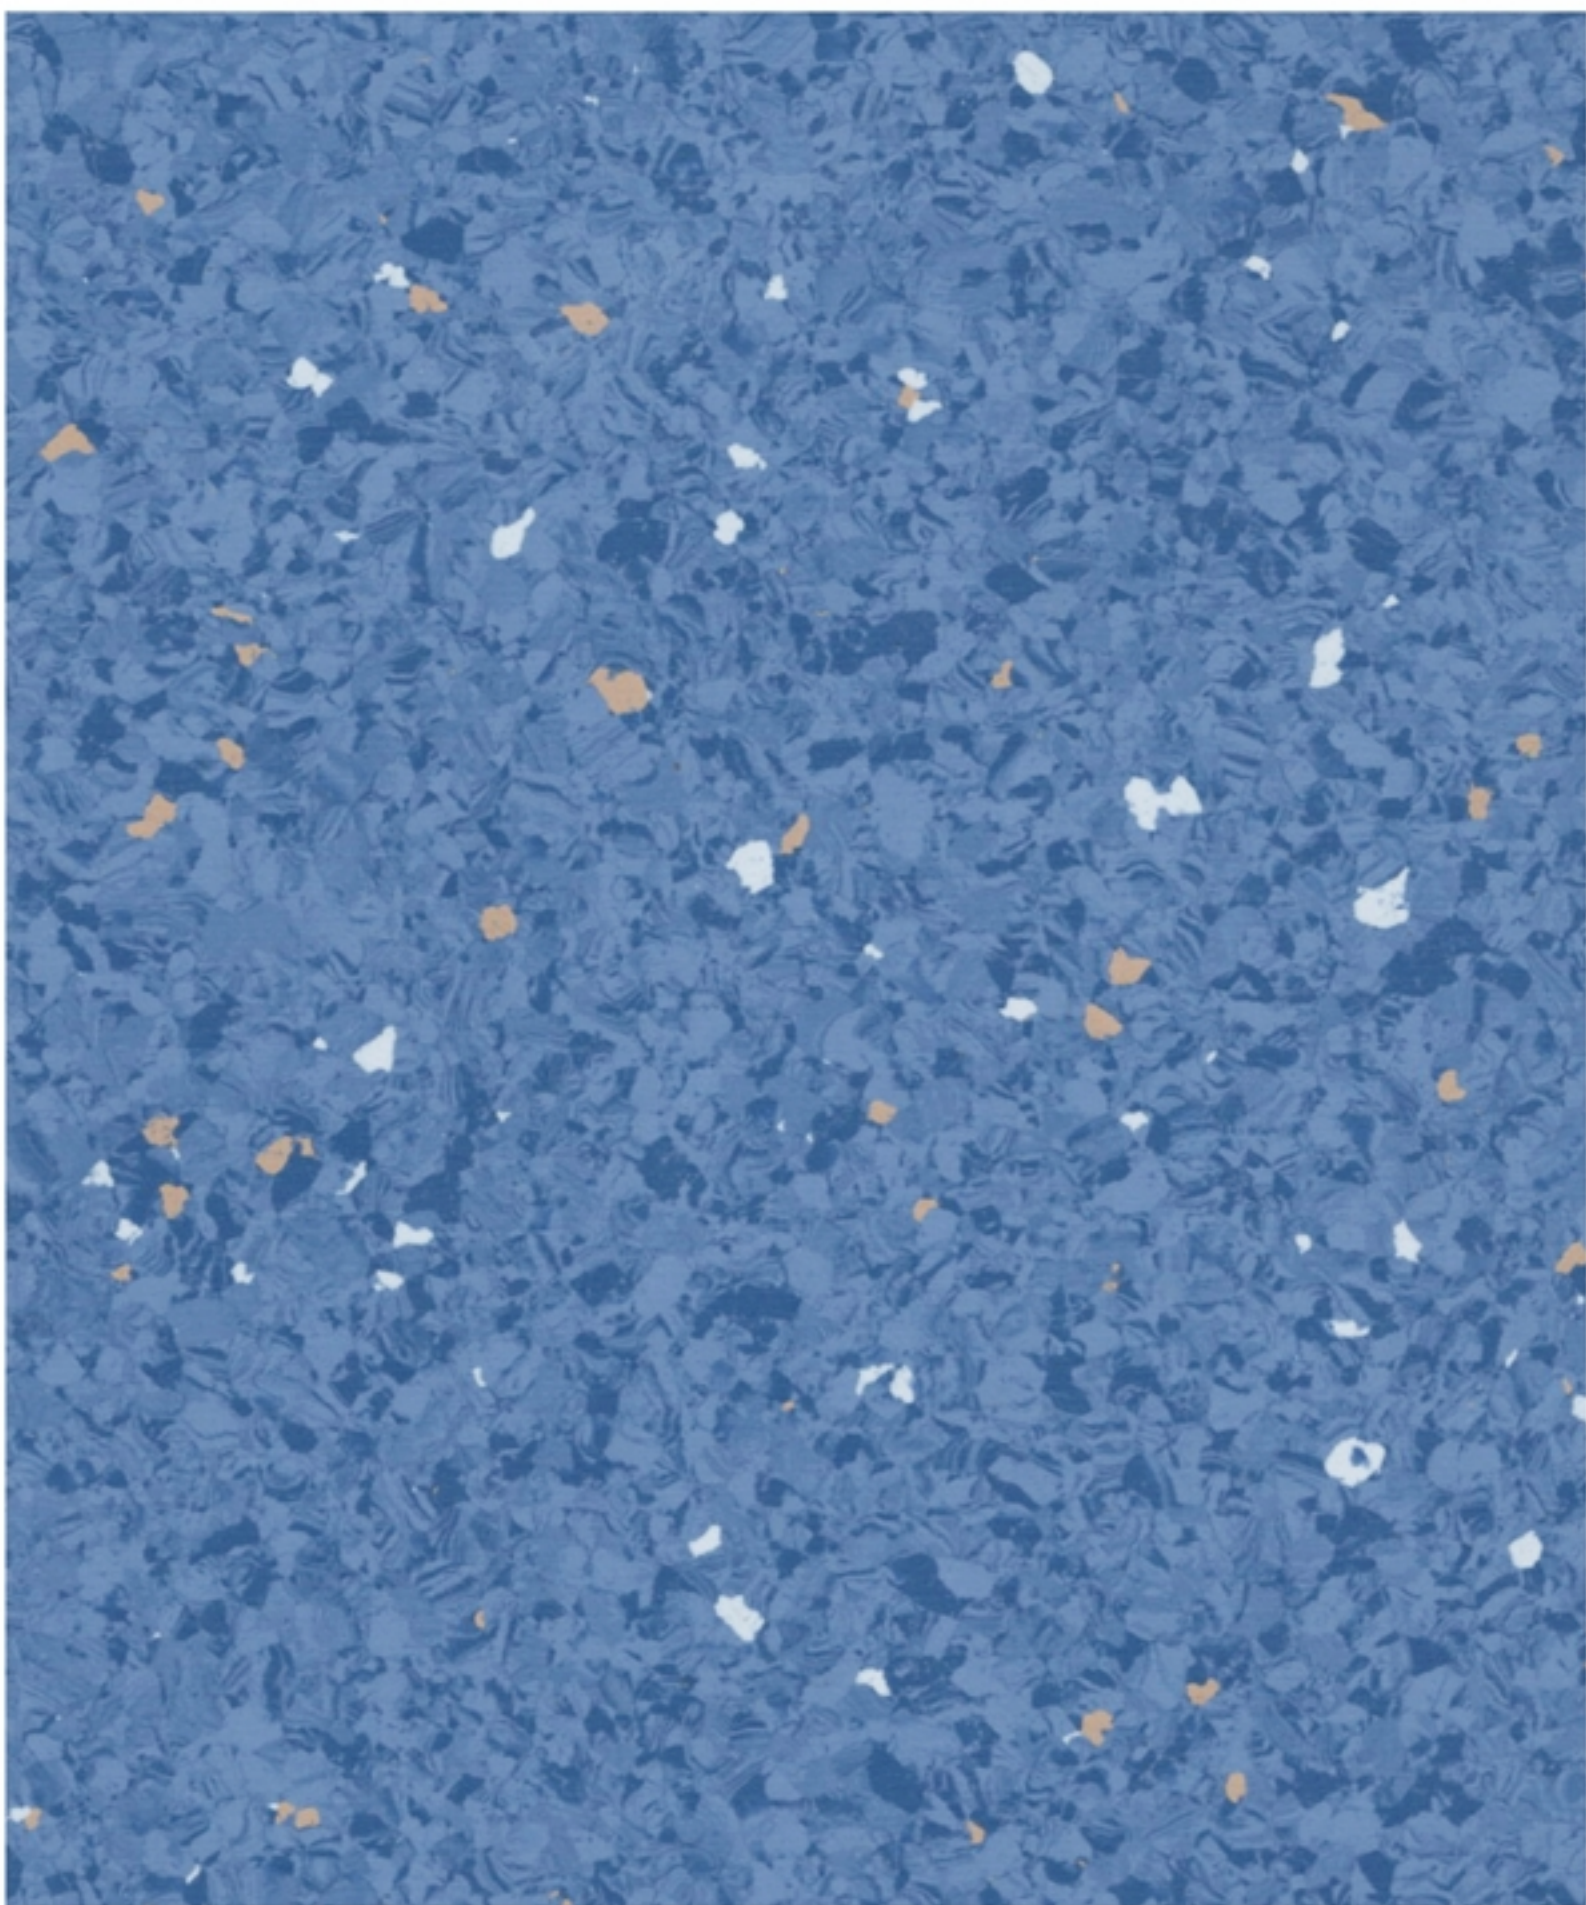


@ WL91 665

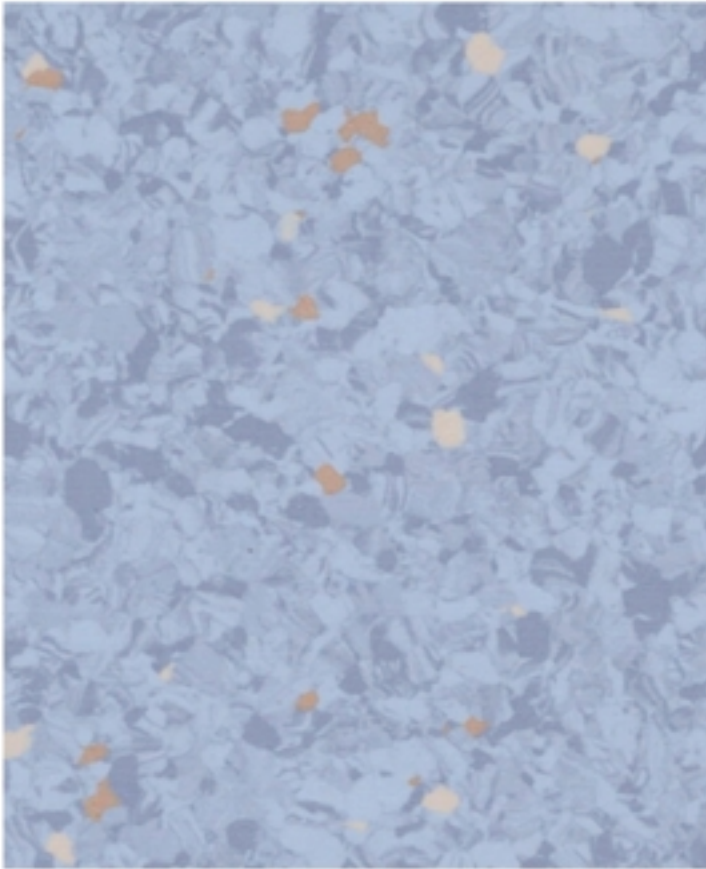


@ WL91 682

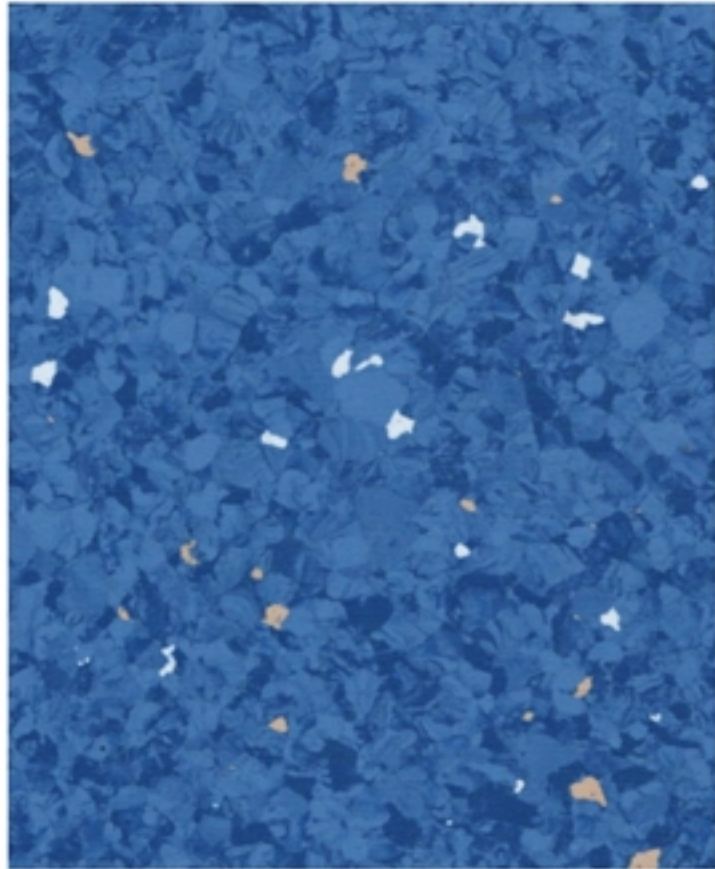

@ WL91 666

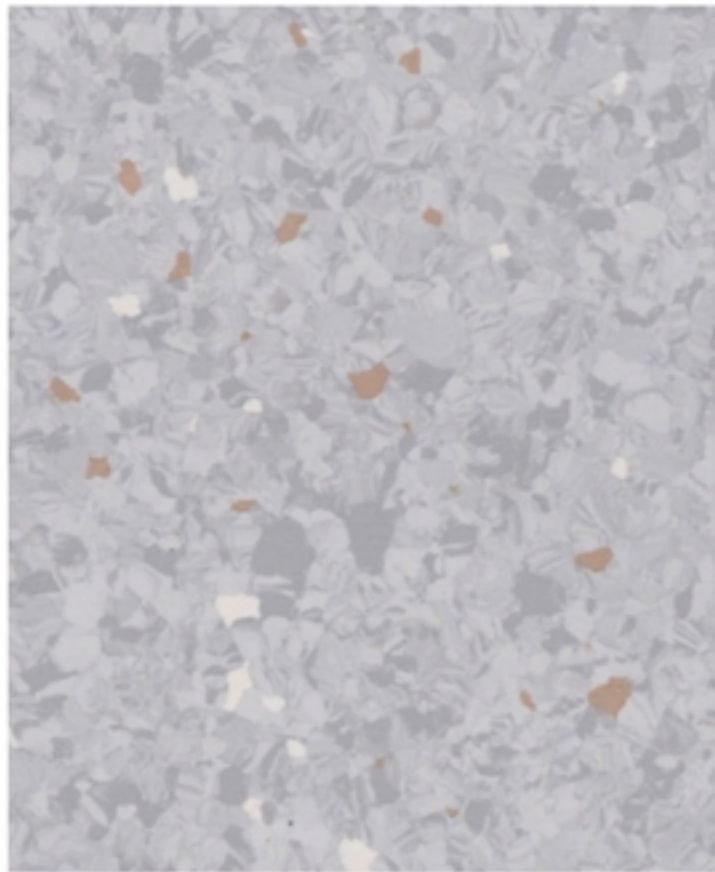

@ WL91 670

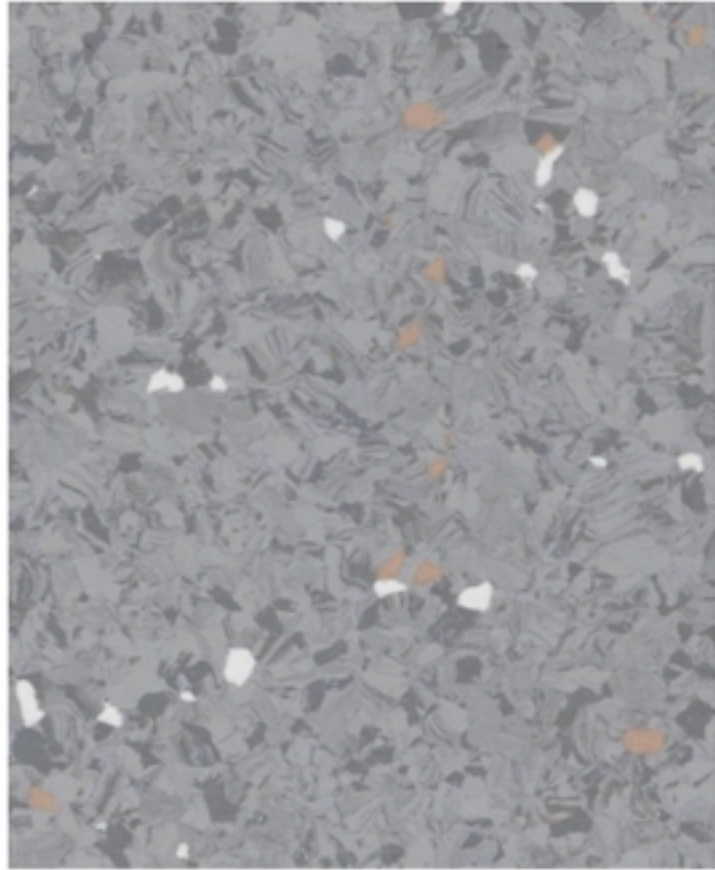


@ WL91 671



@ WL91 672



@ WL91 674

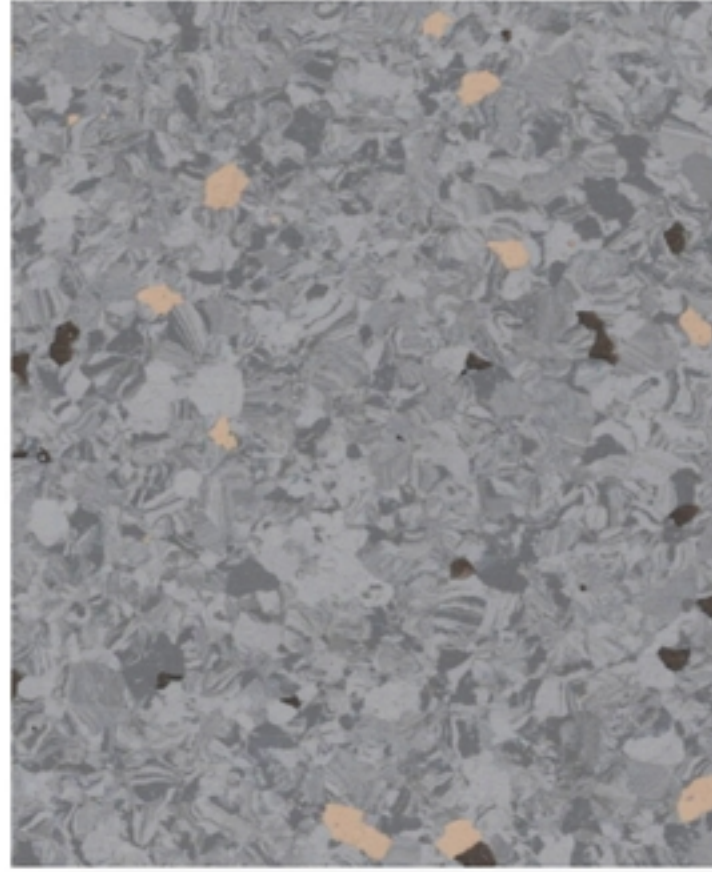

@ WL91 673



@ WL91 654



Charcteristics	Standard	Unit	Result
Type of flooring	ISO 10581 - EN 649		Homogeneous Floor
Material			Polyvinyl chloride
Cover			Strengthen PUR
Safety criteria			
Flammability 	EN 13501-1	class	B _{fl} - s1
Sound 	ISO 10140	dB	3
Slip resistance 	DIN 51130	group	R9
Dynamic coefficient of friction	EN 13893	class	DS
Performance behaviour			
Sheet width 	ISO 24341 - EN 426	m	2
Sheet length 	ISO 24341 - EN 426	m	20
Overall thickness 	ISO 243416 - EN 428	mm	2.0
Total weight 	ISO 23997 - EN 430	g/m ²	2800
Wear resistance 	EN 649	group	T
Residual indentation 	ISO 24343 -1 - EN 433	mm	0.02
Dimensional stability 	ISO 23999 - EN 434	-	X<0.4%, Y<0.4%
Color fastness 	ISO 105 - B02	rating	≥6
Resisatnce to staining	EN 423		No stain
Electrical resistance	EN 1081		>10 ⁹⁻¹⁰
Antibacterial 	ISO 22196		Level 1
Classification			
Domestic	ISO 10874 - EN 685	class	23 heavy duty
Commercial	ISO 10874 - EN 685	class	34 very heavy duty
Industrial	ISO 10874 - EN 685	class	43 heavy duty
Additional property			
Castor Chair 	✓	Antistatic Behaviour 	✓
Underfloor Heating 	✓	Chemical Resistance 	✓



ECO-Friendly Plasticizer

Adhering to the concepts of health, safety and environmental protection, Wolflor continuously optimizes and improves the raw material formula of PVC products. The products use environmentally friendly non-collar benzene plasticizers to provide safety protection for humans and the environment.



Optimal Indoor Air Quality

TVOC is a collective name for volatile organic compounds, which are mainly derived from the combustion products of fuel and the release of artificial products (such as interior decoration materials, coatings, furniture, flooring, etc.). The TVOC release of Wolflor products is almost zero, which is at the leading level in the industry and guarantees the best indoor air quality.

