

ANTIBACTERIAL AND ANTI SKIDDING
WEARPROOF AND ANTI FOULING
ENVIRONMENTAL PROTECTION



HOMOGENEOUS FLOOR STRENGTHEN POLYURETHANE SHEET

ATLAS


2.0T

Wolflor
flooring expert

ATLAS HOMOGENEOUS

STRENGTHEN POLYURETHANE SHEET

- Durable, with fewer fillers than the industry standard to provide superior resistance to heavy traffic abrasion, from permanent equipment to wheeled traffic and hospital beds.
- No wax maintenance protocol with PUR™ surface treatment.
- Naturally bacteriostatic to help stop the spread of common hospital acquired infections.
- Matte, non-glaring surface recommended in healthcare applications.
- Lightweight, flexible homogeneous flooring makes for easy installation, coving, skirting, and welding.
- True colors that never fade and keep their original tone.

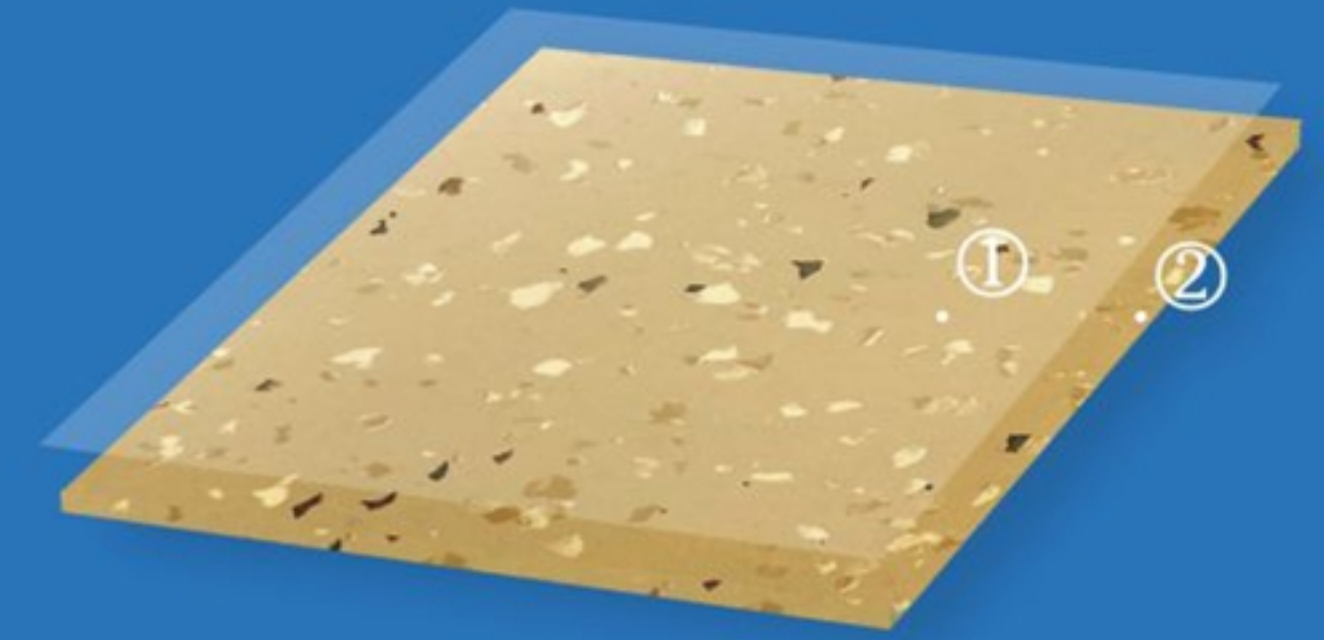

① PUR™ surface treatment


② 2mm compacted homogeneous layer



Wolflor
flooring expert

ATLAS

Strengthen Polyurethane Homogeneous Flooring

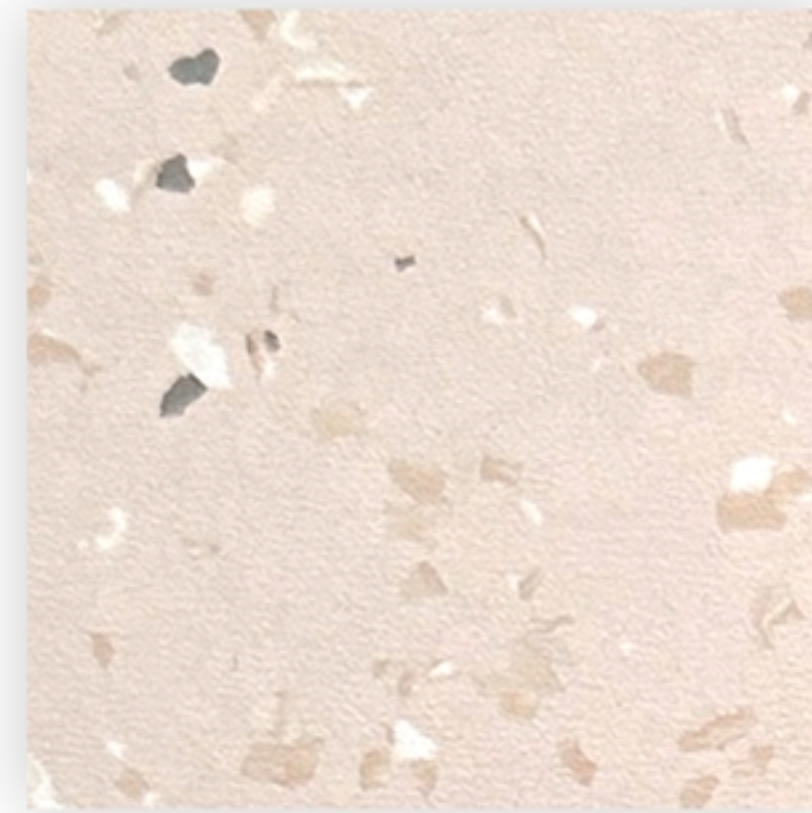


© WL71 6012



© WL71 6013




© WL71 6014

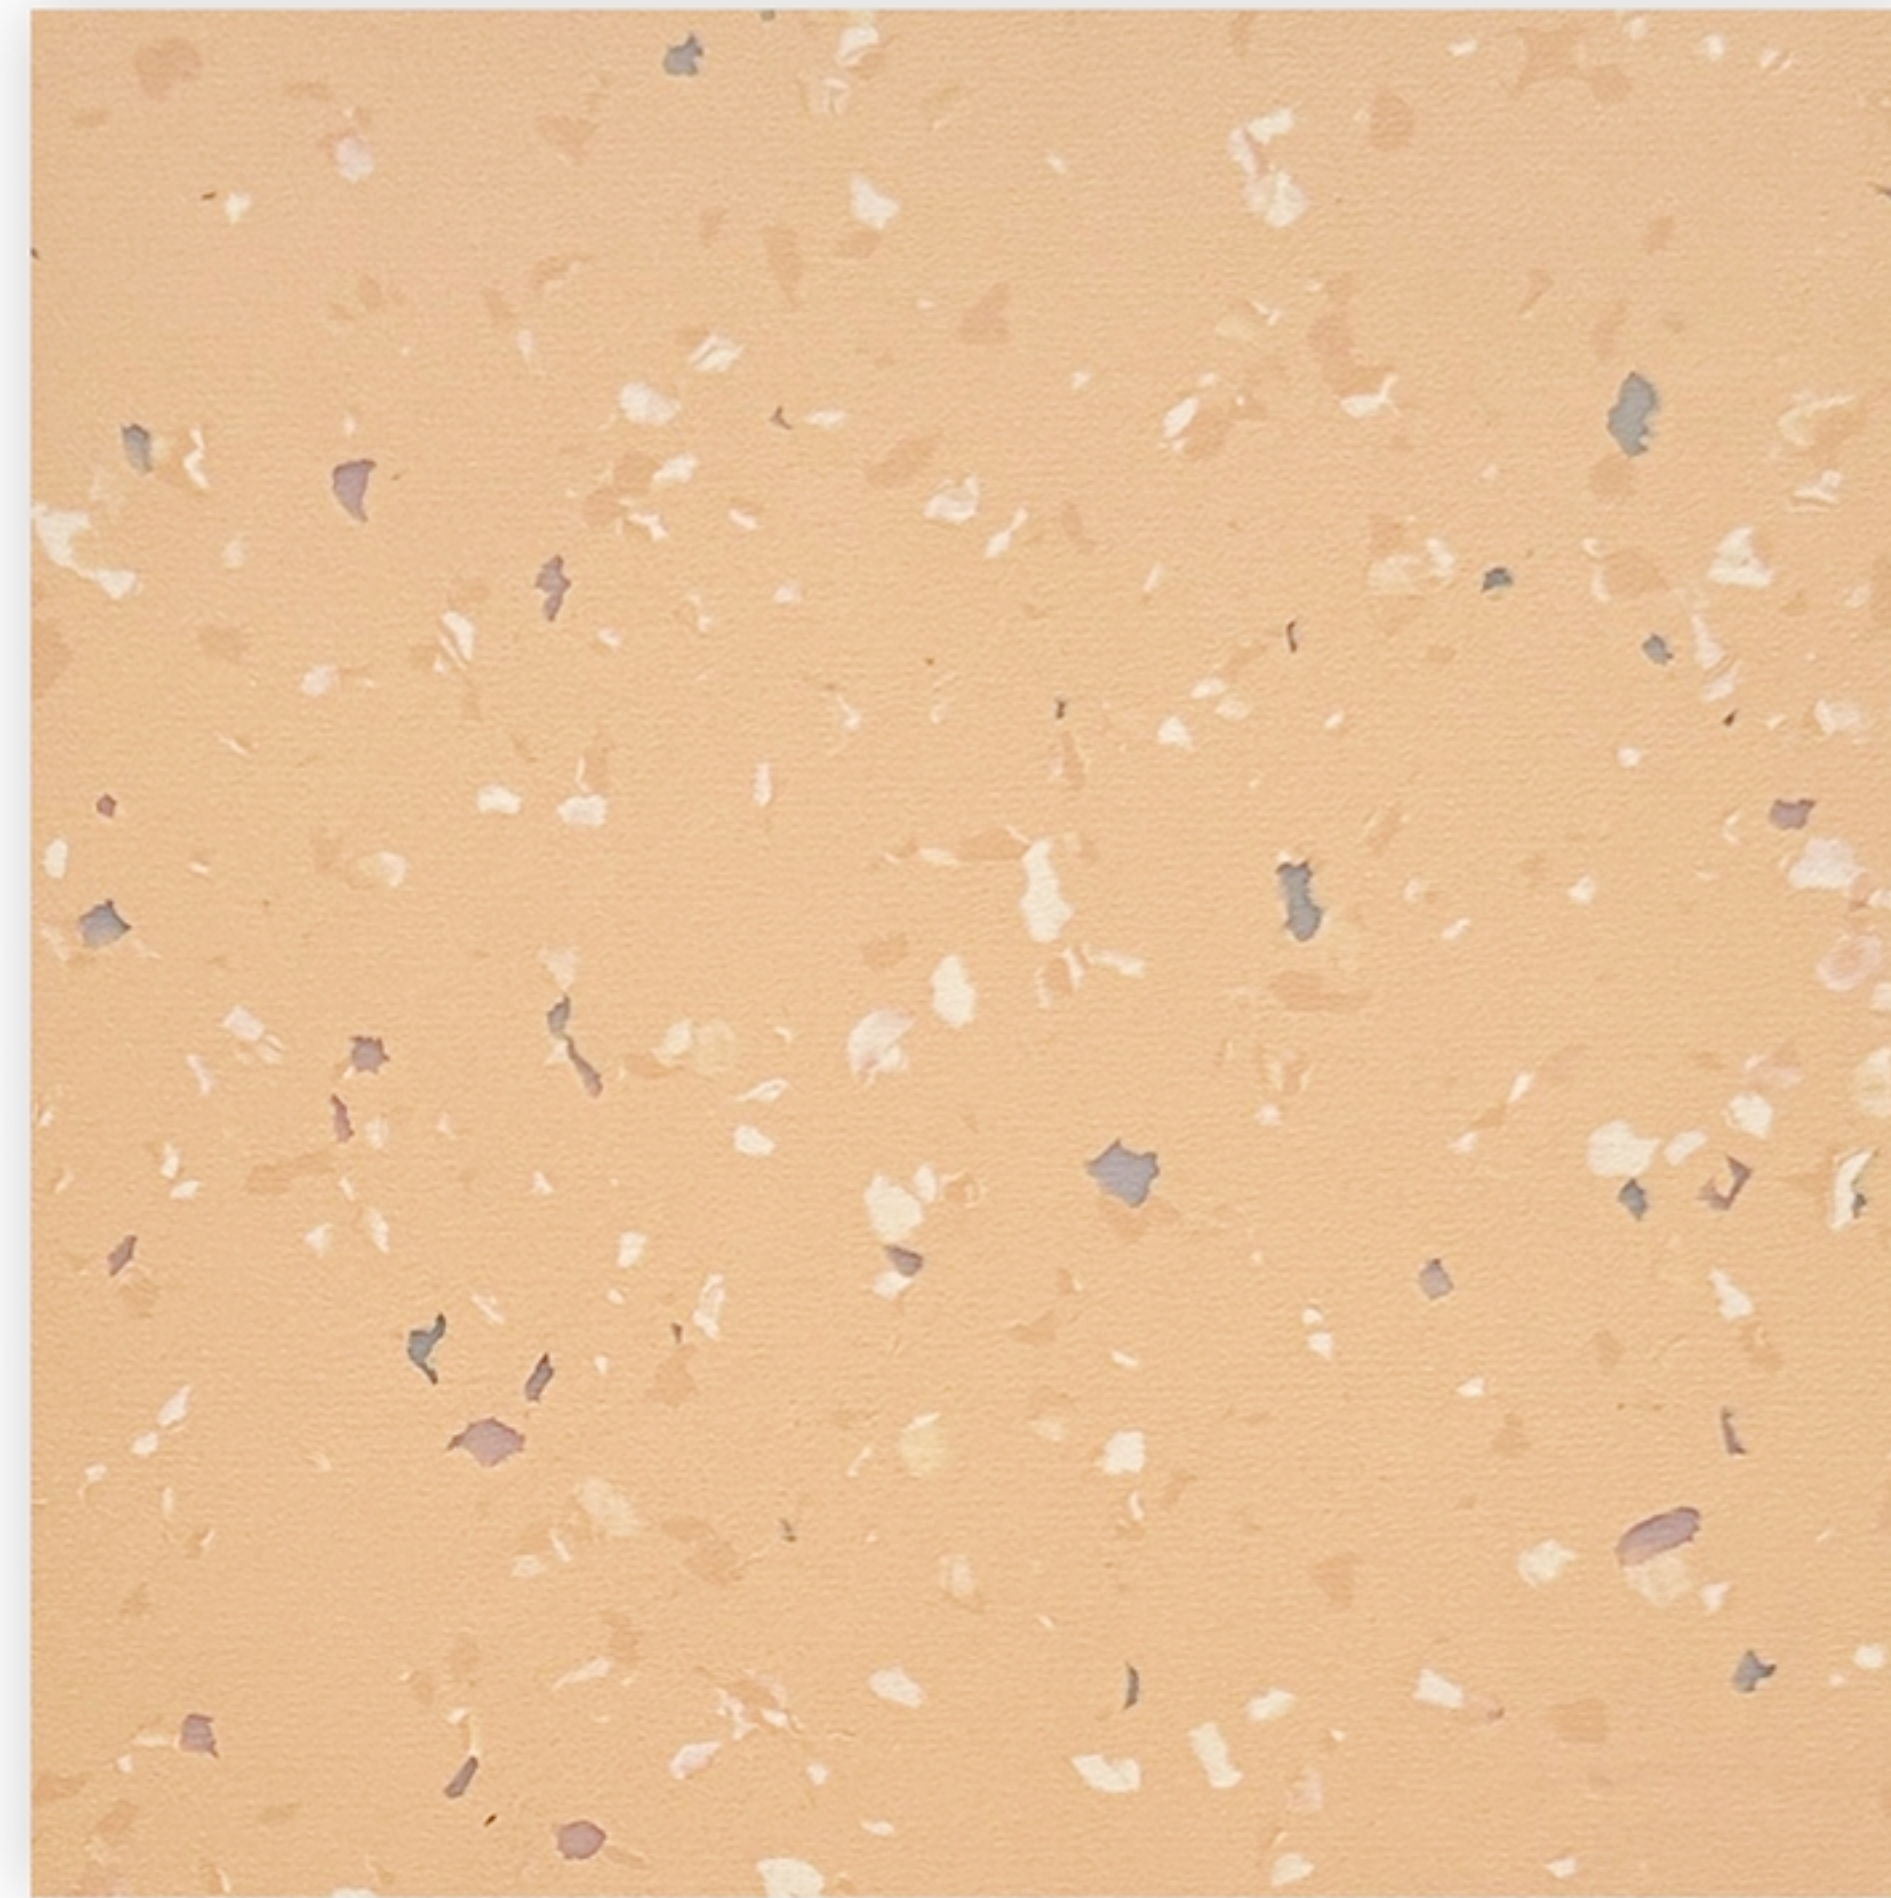

© WL71 0159



© WL71 0161

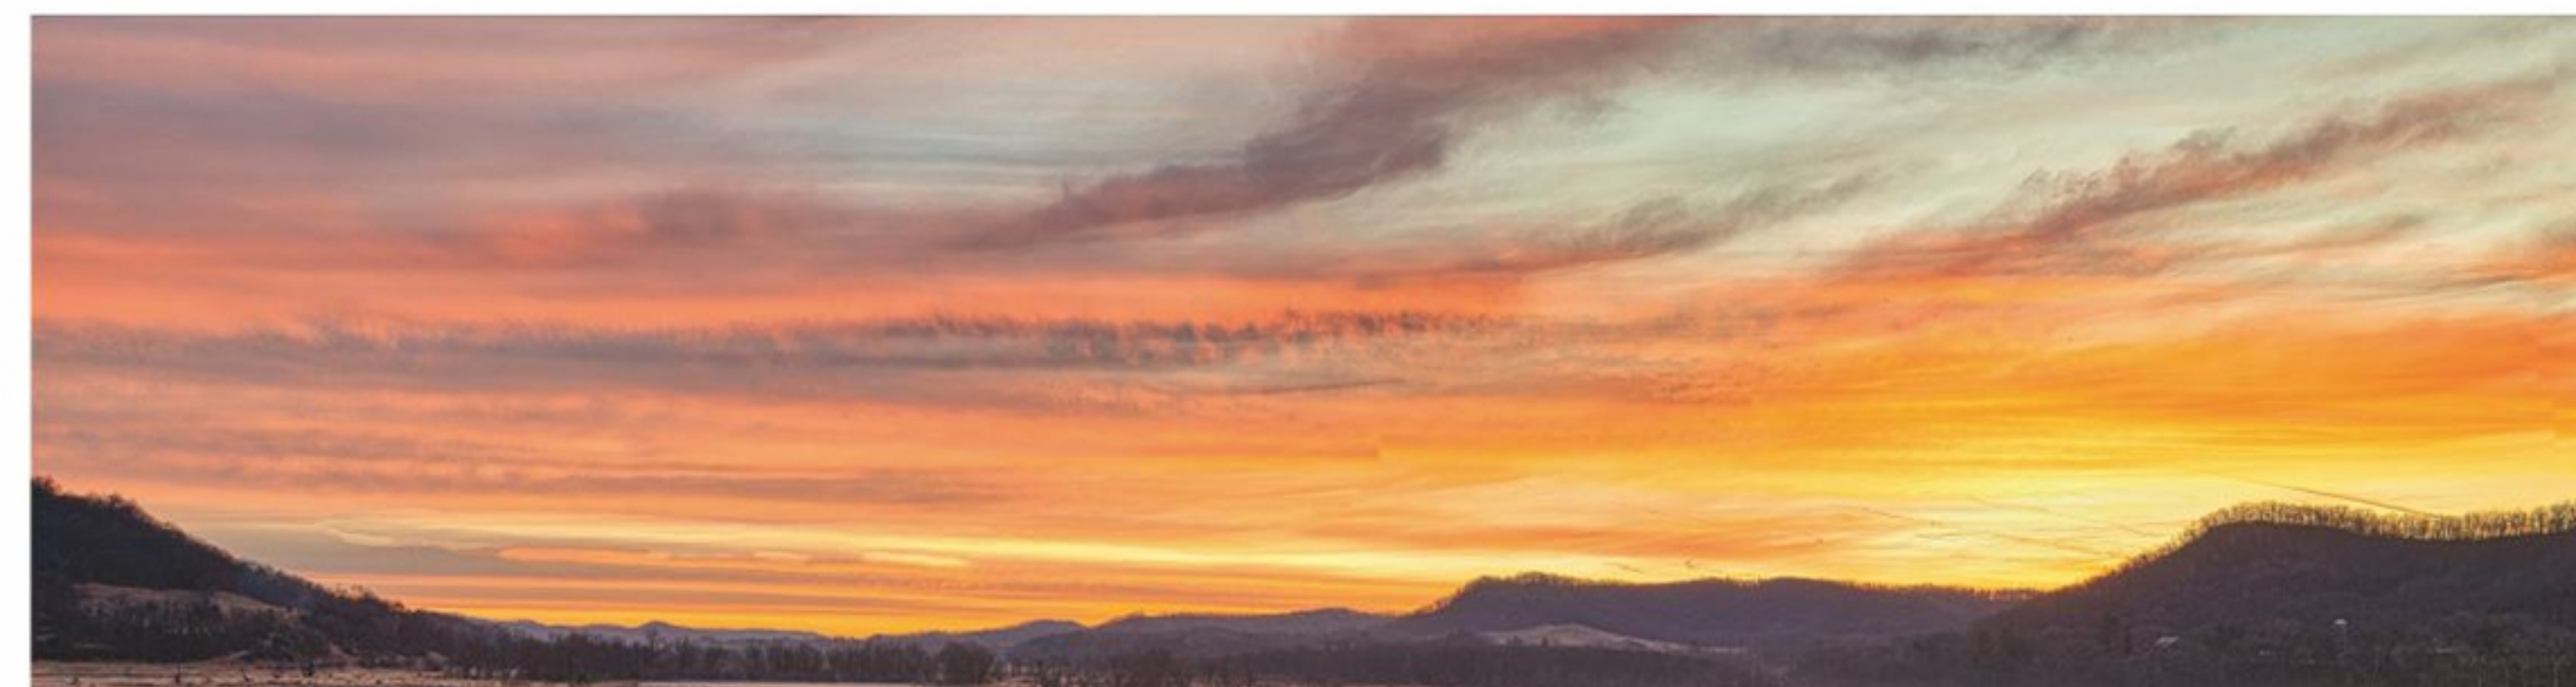


Wolflor
Flooring expert

ATLAS

Dimension:2.0mm(T)x2.0m(W)x20m(L)




© WL71 0155

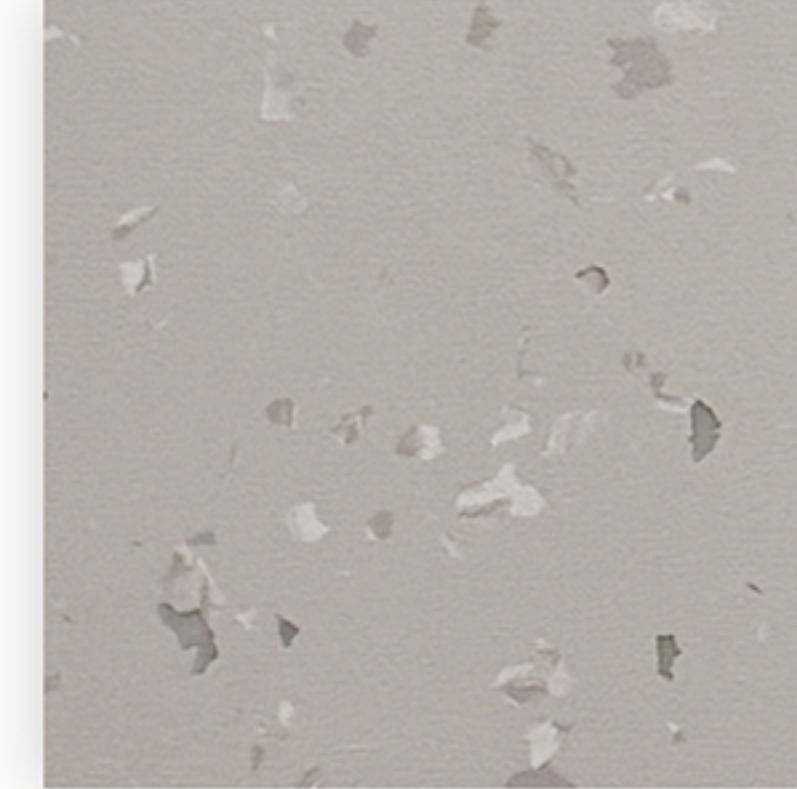

© WL71 0156



© WL71 0157

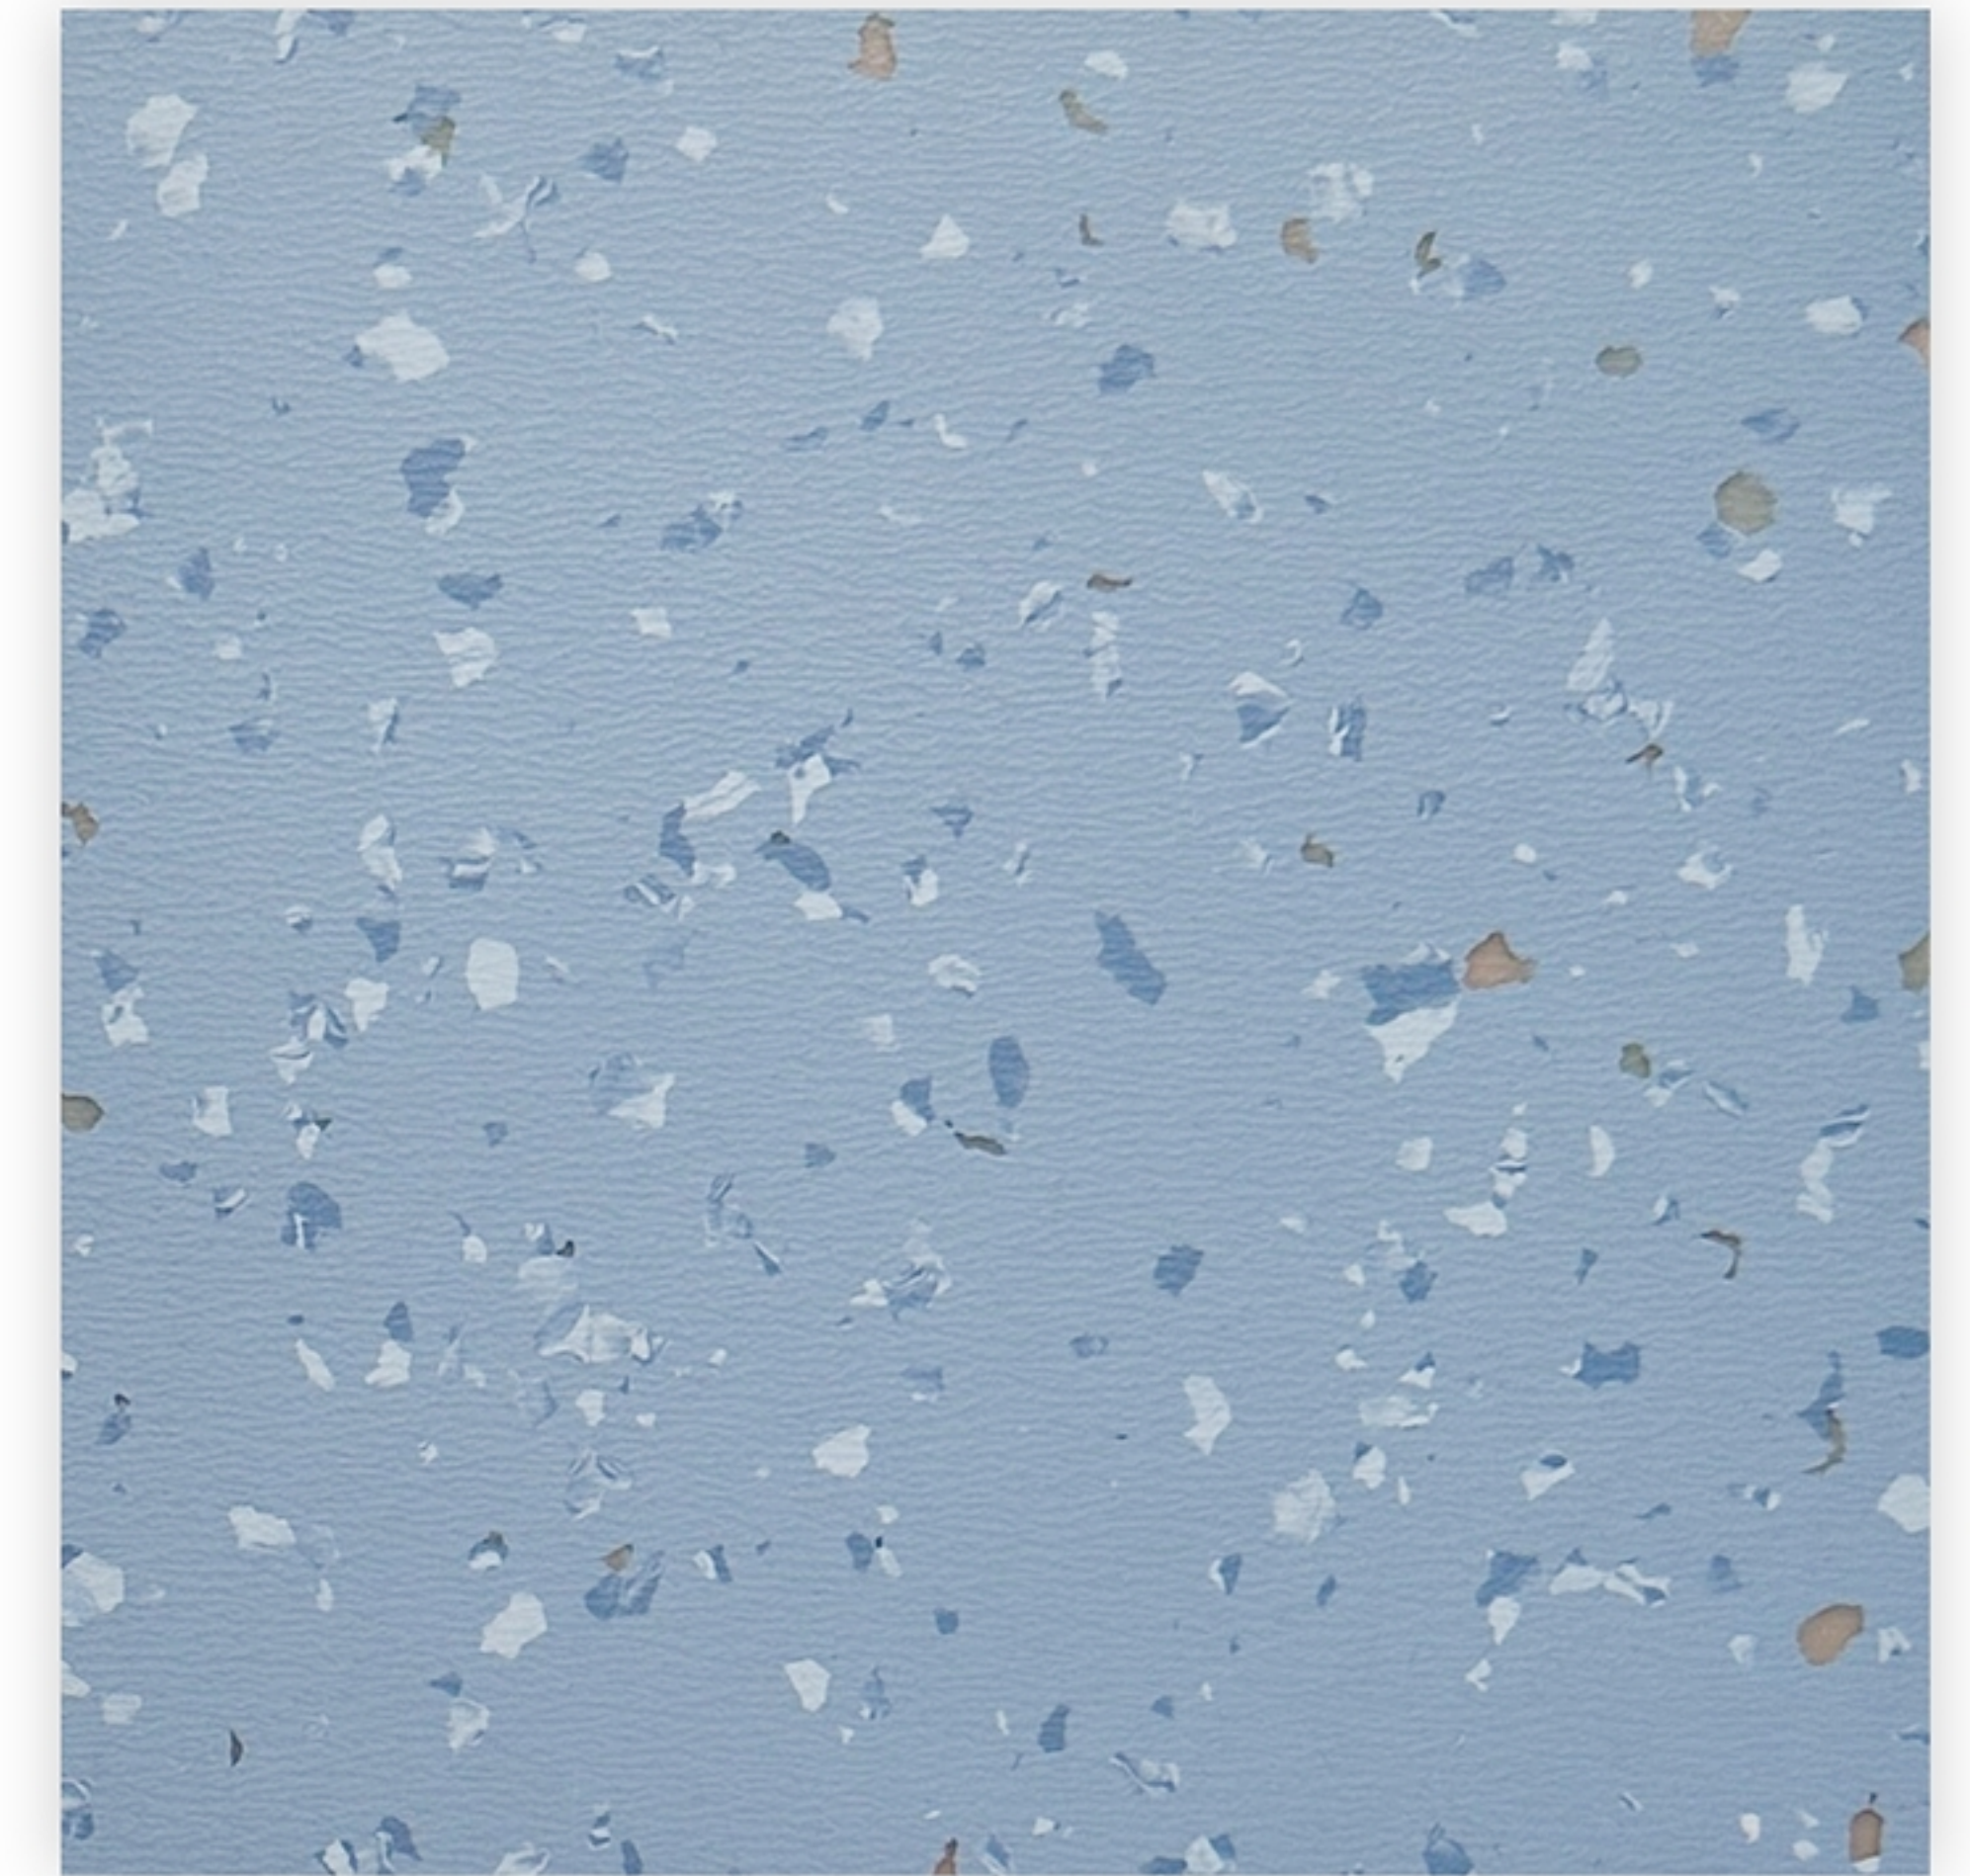


© WL71 0158



© WL71 0154




© WL71 0160

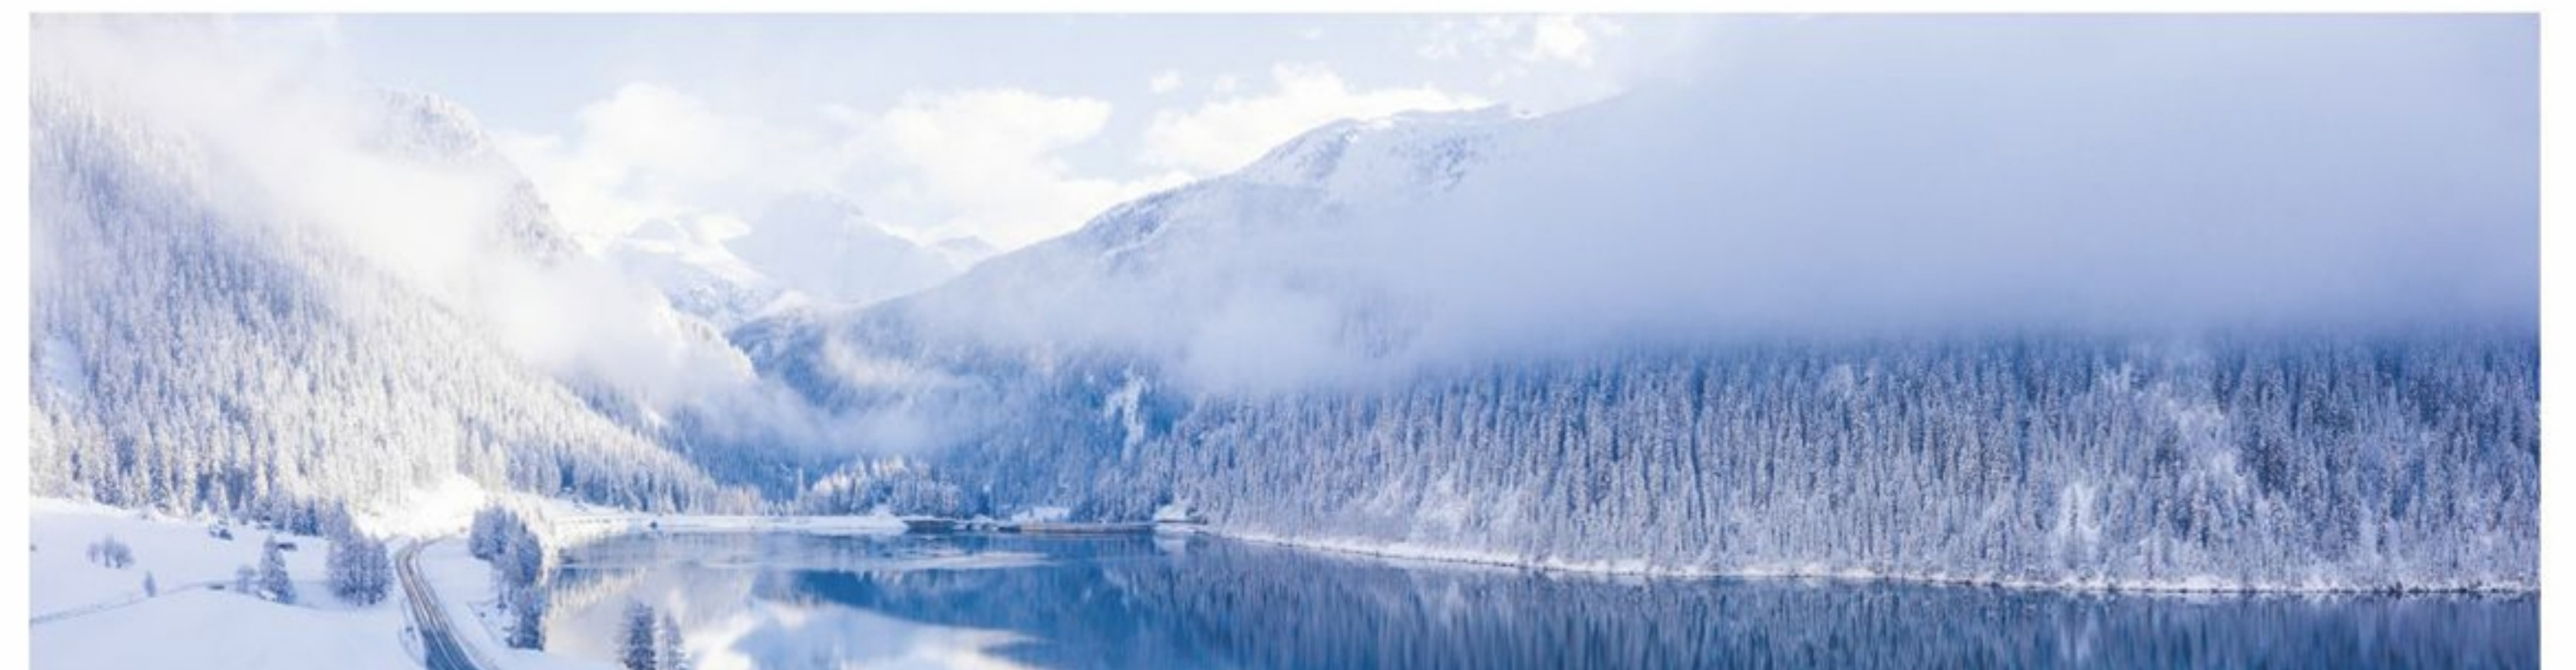




© WL71 0153

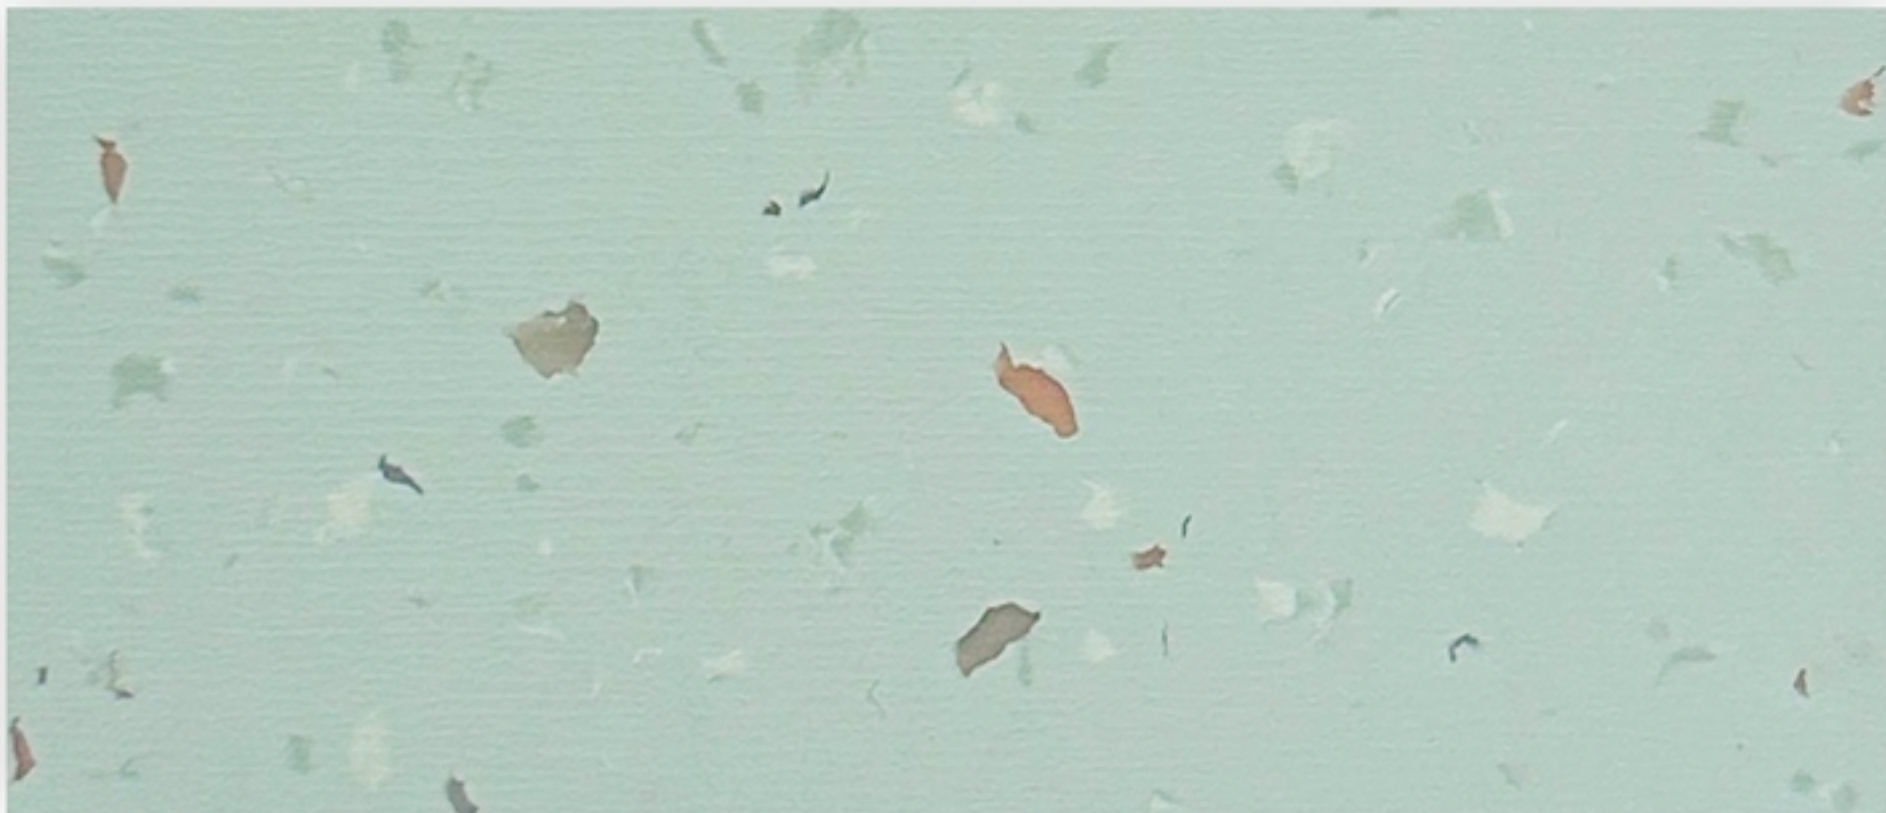


© WL71 6006



© WL71 6001

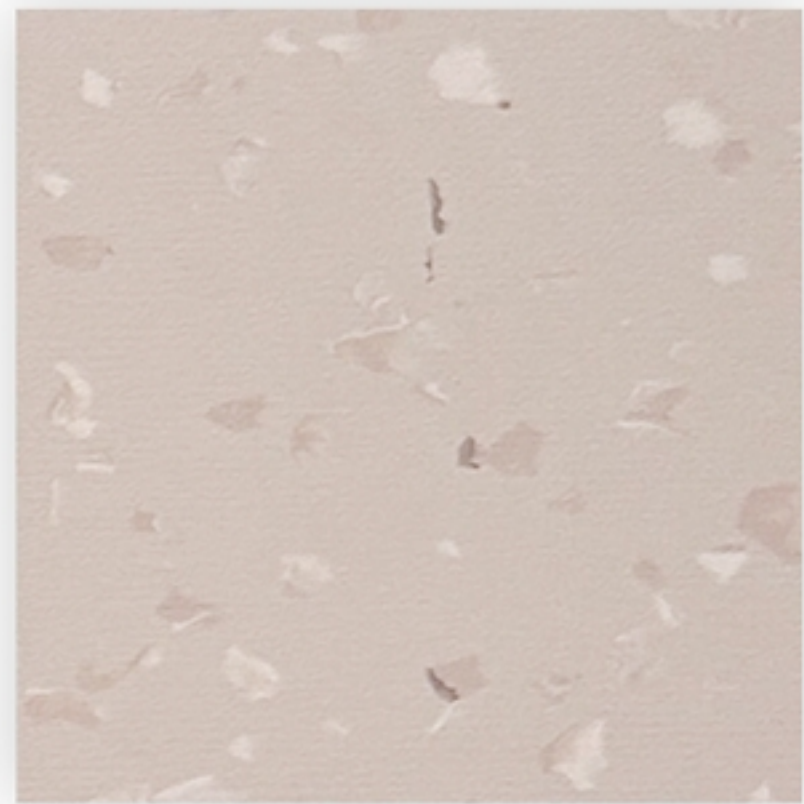

© WL71 6002

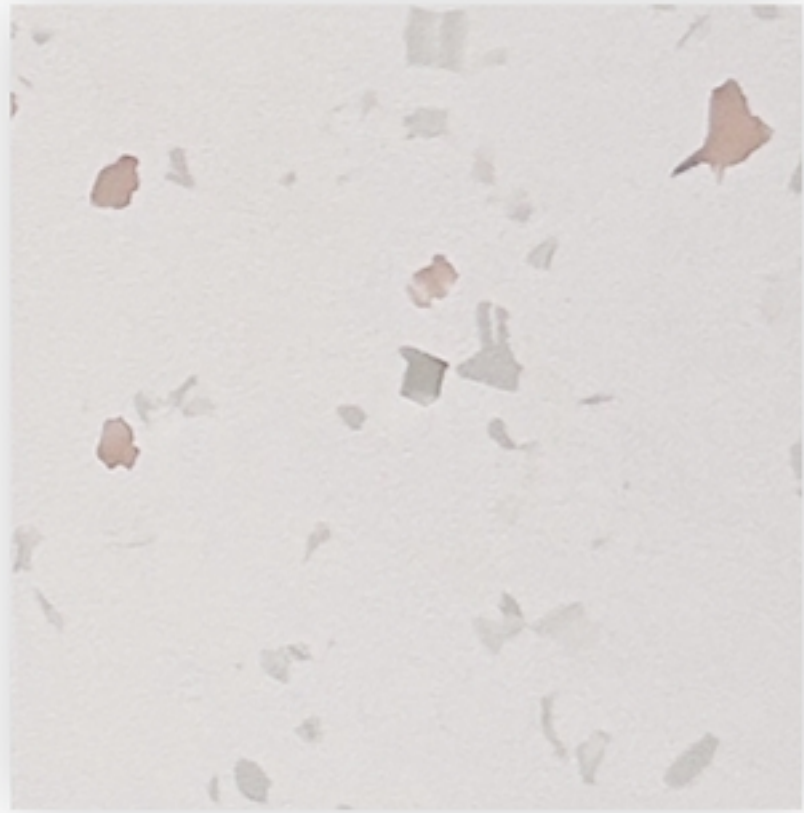

© WL71 6004



Charcteristics	Standard	Unit	Result
Type of flooring	ISO 10581 - EN 649		Homogeneous Floor
Material			Polyvinyl chloride
Cover			Strengthen PUR
Safety criteria			
Flammability 	EN 13501-1	class	B _{s1} - s1
Sound 	ISO 10140	dB	3
Slip resistance 	DIN 51130	group	R9
Dynamic coefficient of friction	EN 13893	class	DS
Performance behaviour			
Sheet width 	ISO 24341 - EN 426	m	2
Sheet length 	ISO 24341 - EN 426	m	20
Overall thickness 	ISO 243416 - EN 428	mm	2.0
Total weight 	ISO 23997 - EN 430	g/m ²	2800
Wear resistance 	EN 649	group	T
Residual indentation 	ISO 24343 -1 - EN 433	mm	0.02
Dimensional stability 	ISO 23999 - EN 434	-	X<0.4%, Y<0.4%
Color fastness 	ISO 105 - B02	rating	≥6
Resisittance to staining	EN 423		No stain
Electrical resistance	EN 1081		>10 ⁹⁻¹⁰
Antibacterial 	ISO 22196		Level 1
Classification			
Domestic	ISO 10874 - EN 685	class	23 heavy duty
Commercial	ISO 10874 - EN 685	class	34 very heavy duty
Industrial	ISO 10874 - EN 685	class	43 heavy duty
Additional property			
Castor Chair 	✓	Antistatic Behaviour 	✓
Underfloor Heating 	✓	Chemical Resistance 	✓



ECO-Friendly Plasticizer

Adhering to the concepts of health, safety and environmental protection, Wolflor continuously optimizes and improves the raw material formula of PVC products. The products use environmentally friendly non-collar benzene plasticizers to provide safety protection for humans and the environment.



Optimal Indoor Air Quality

TVOC is a collective name for volatile organic compounds, which are mainly derived from the combustion products of fuel and the release of artificial products (such as interior decoration materials, coatings, furniture, flooring, etc.). The TVOC release of Wolflor products is almost zero, which is at the leading level in the industry and guarantees the best indoor air quality.

