

ANTIBACTERIAL AND ANTI SKIDDING  
WEARPROOF AND ANTIFOULING  
ENVIRONMENTAL PROTECTION



# BERMUDA HOMOGENEOUS

STRENGTHEN POLYURETHANE SHEET


HOMOGENEOUS FLOOR  
STRENGTHEN POLYURETHANE SHEET

BERMUDA

2.0T

**Wolflor**  
flooring expert

- Durable, with fewer fillers than the industry standard to provide superior resistance to heavy traffic abrasion, from permanent equipment to wheeled traffic and hospital beds.
- No wax maintenance protocol with PUR™ surface treatment.
- Naturally bacteriostatic to help stop the spread of common hospital acquired infections.
- Matte, non-glaring surface recommended in healthcare applications.
- Lightweight, flexible homogeneous flooring makes for easy installation, coving, skirting, and welding.
- True colors that never fade and keep their original tone.

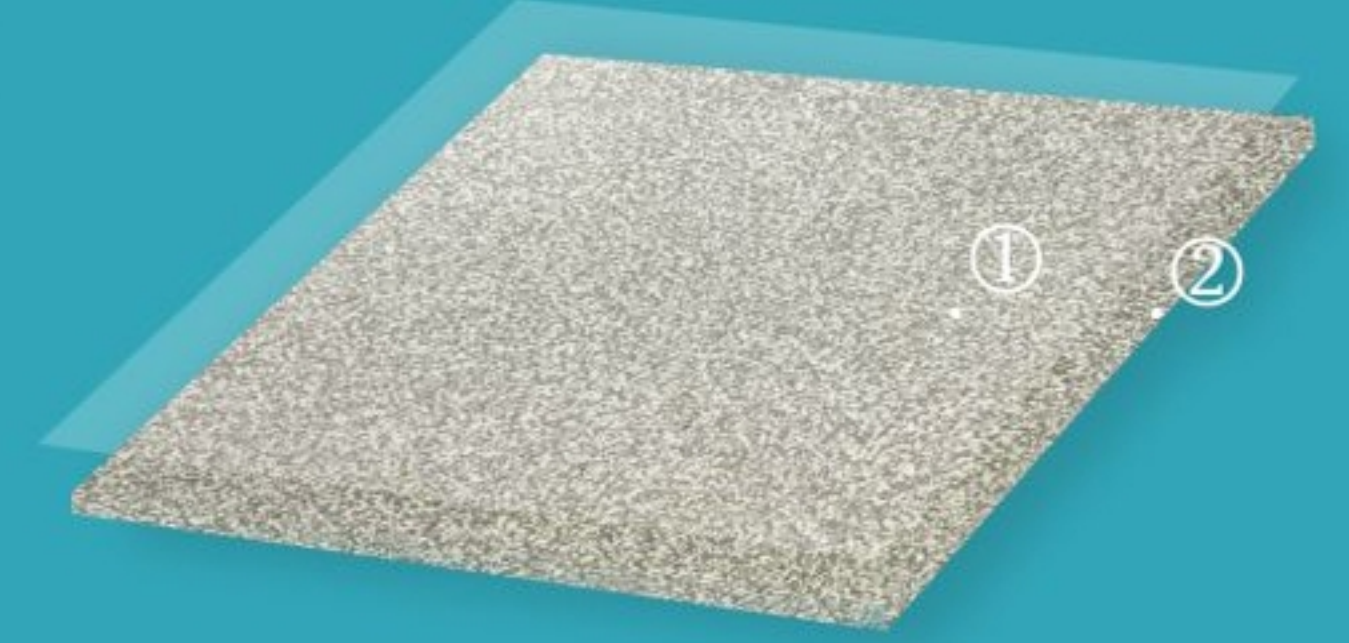


- ① PUR™ surface treatment
- ② 2mm compacted homogeneous layer



**Wolflor**  
flooring expert

BERMUDA

Strengthen Polyurethane Homogeneous Flooring

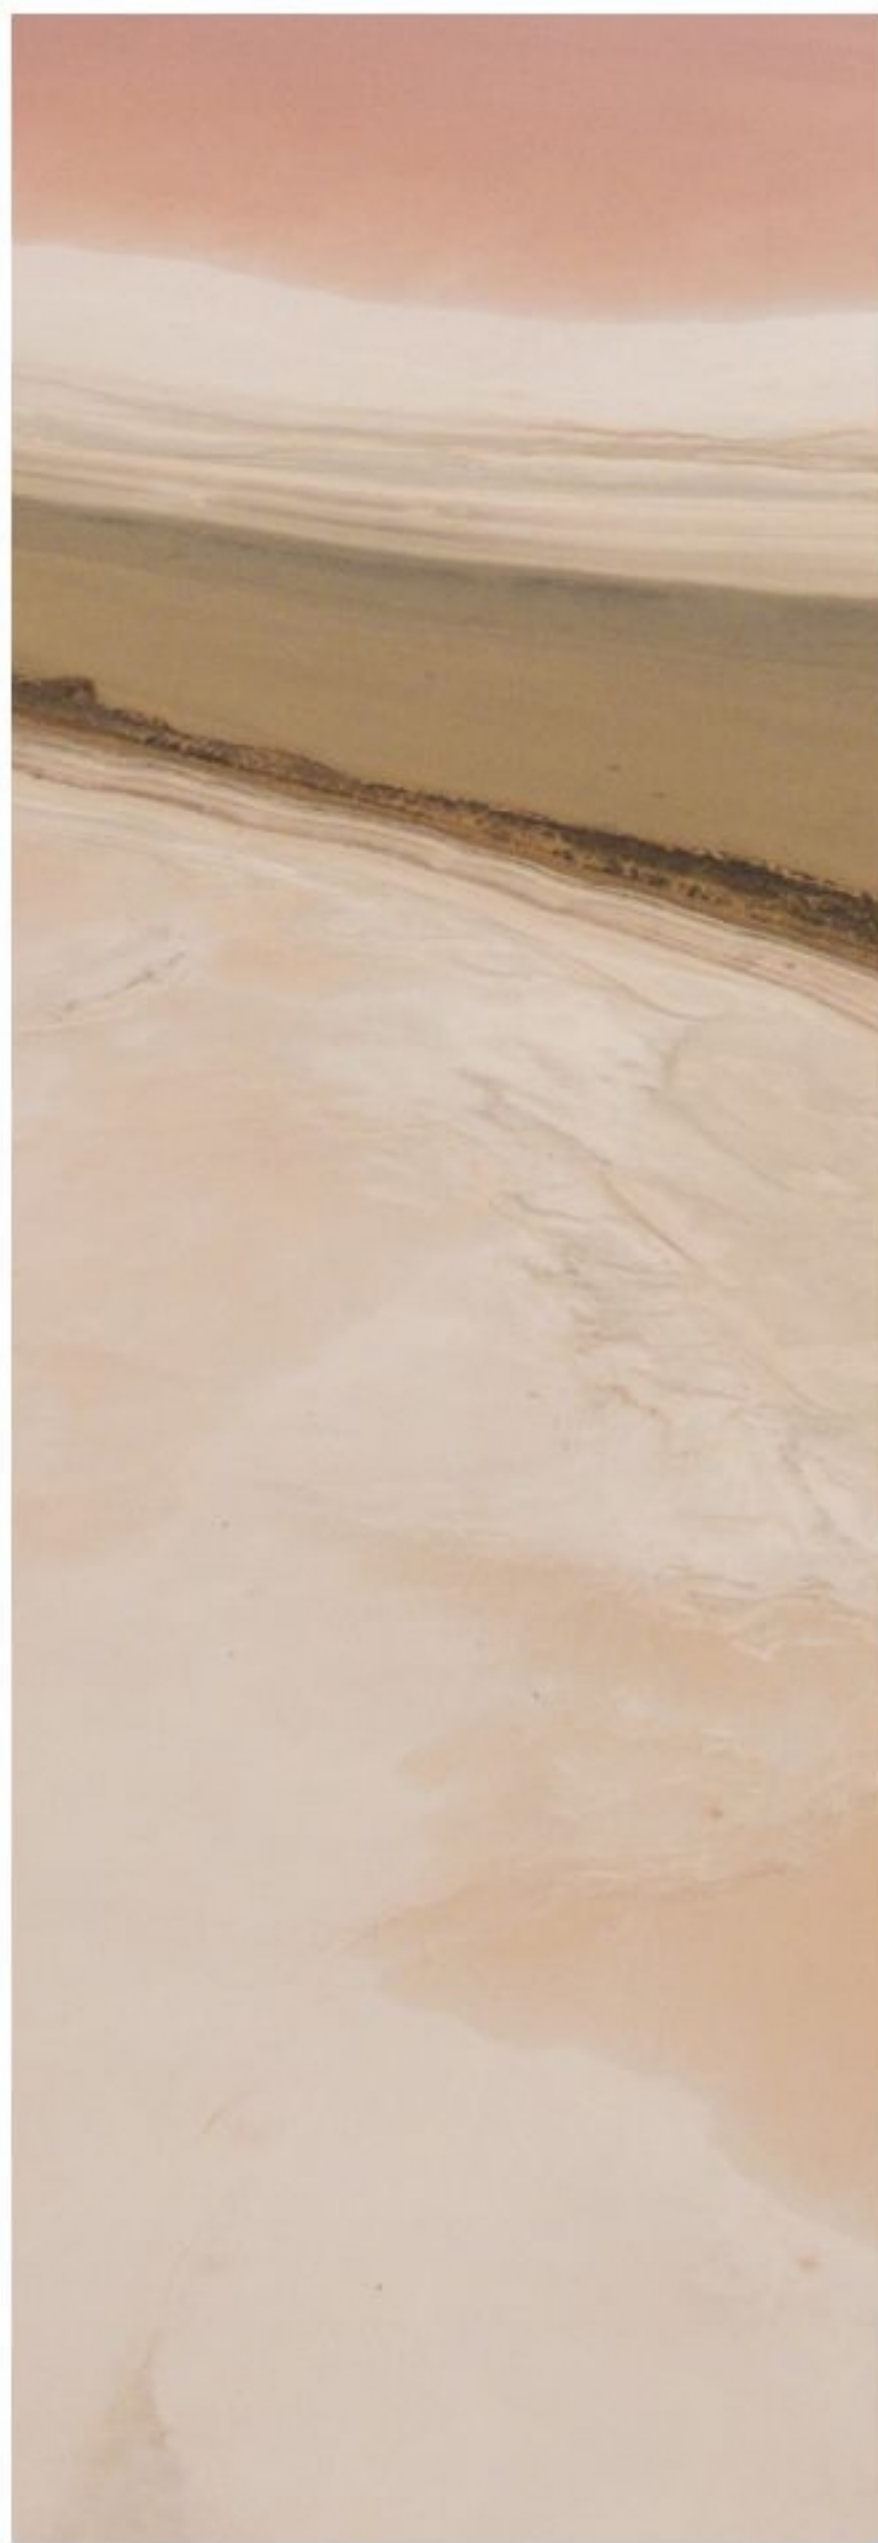

© WL81 5201



© WL81 5202



© WL81 5301



© WL81 5401




BERMUDA

Dimension:2.0mm(T)x2.0m(W)x20m(L)



© WL81 5502

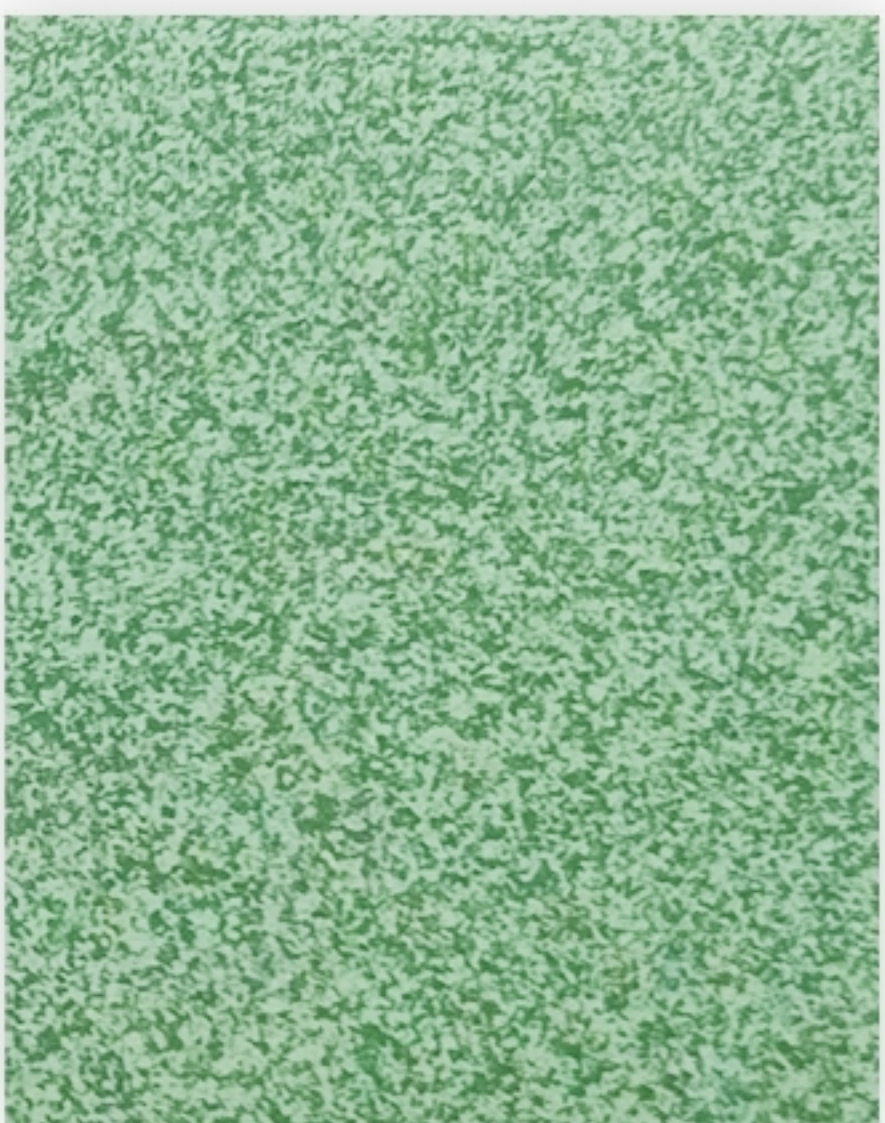


© WL81 5501




© WL81 5001




© WL81 5002

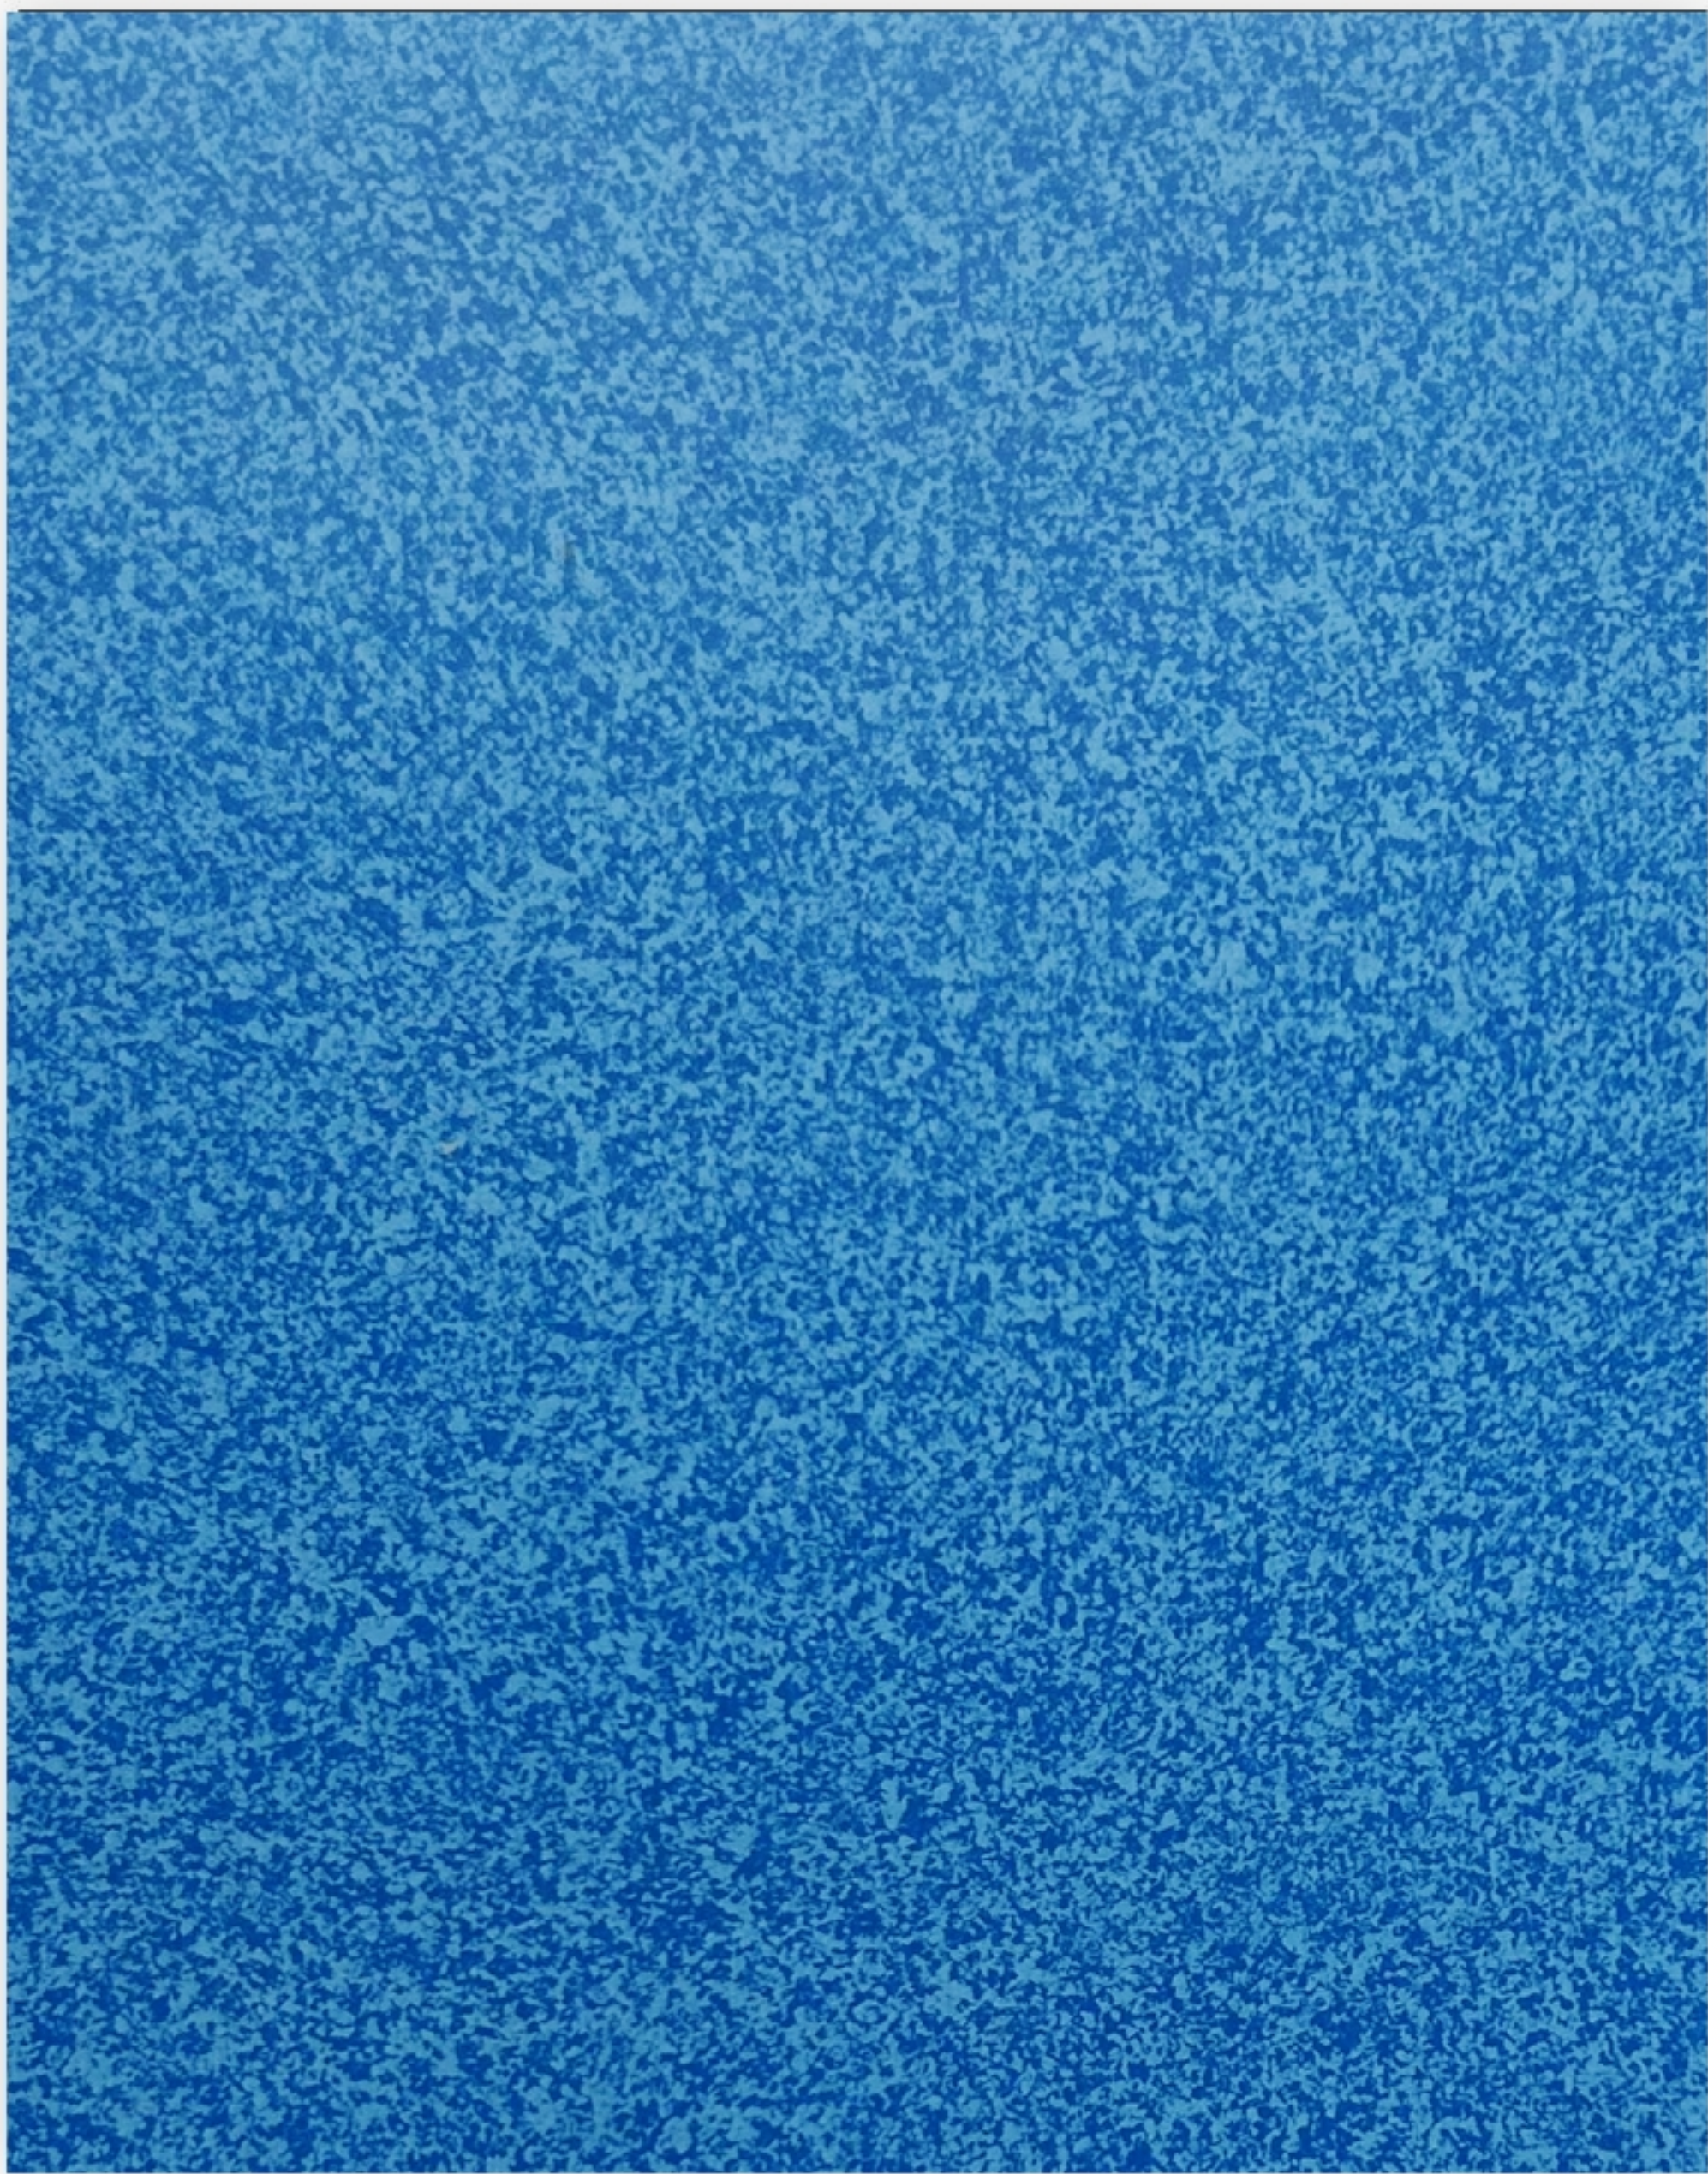


© WL81 5603

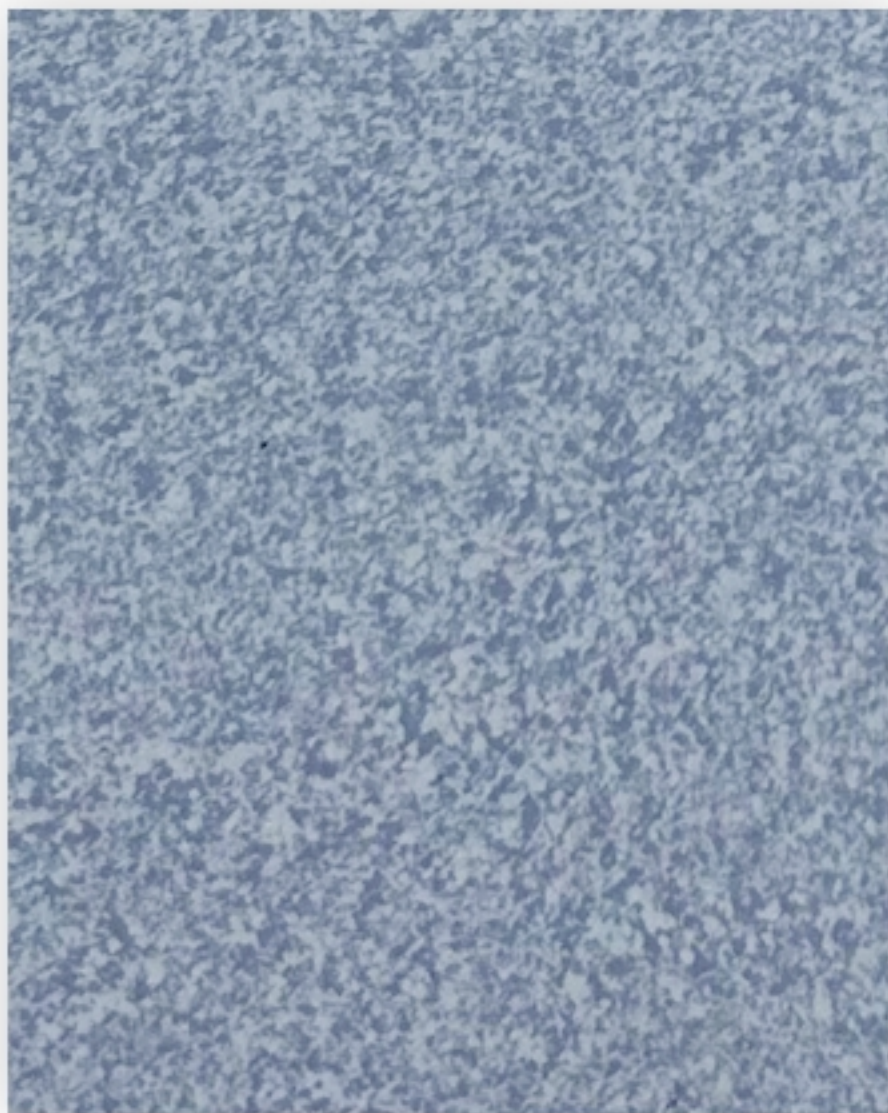


© WL81 5601

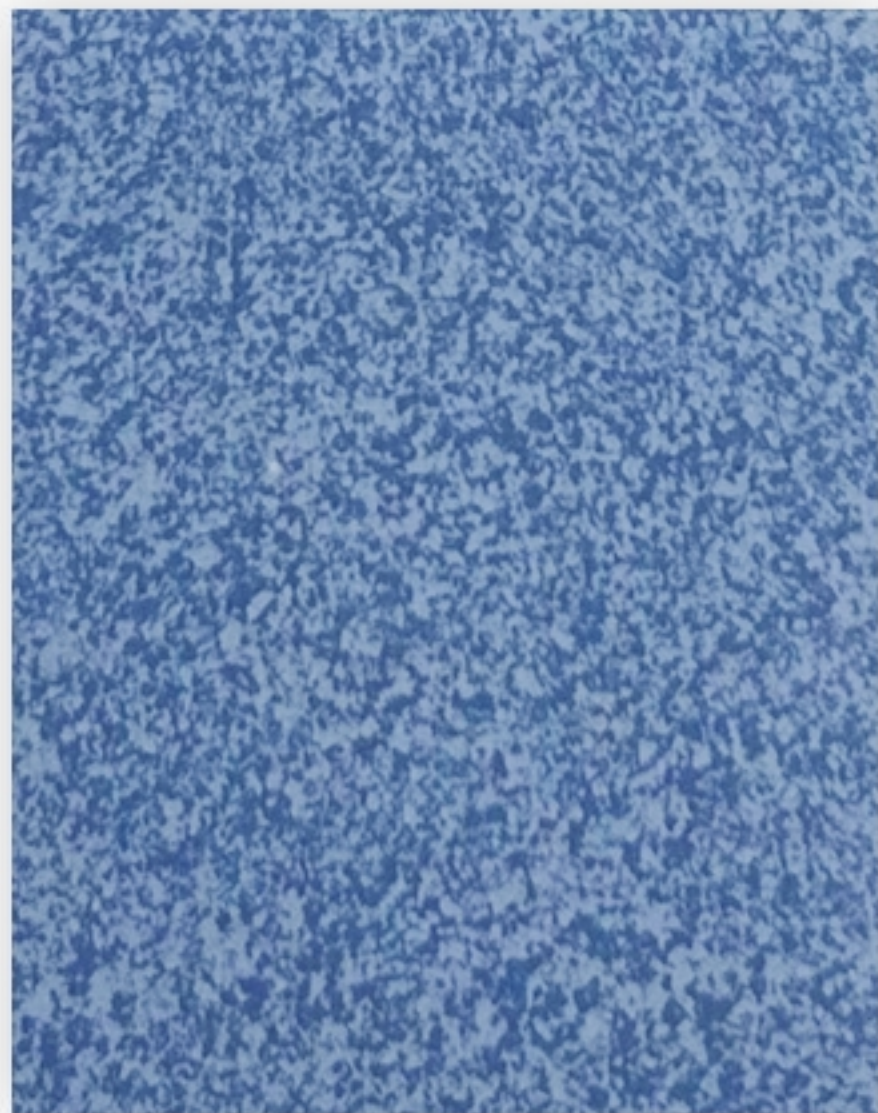

© WL81 5602

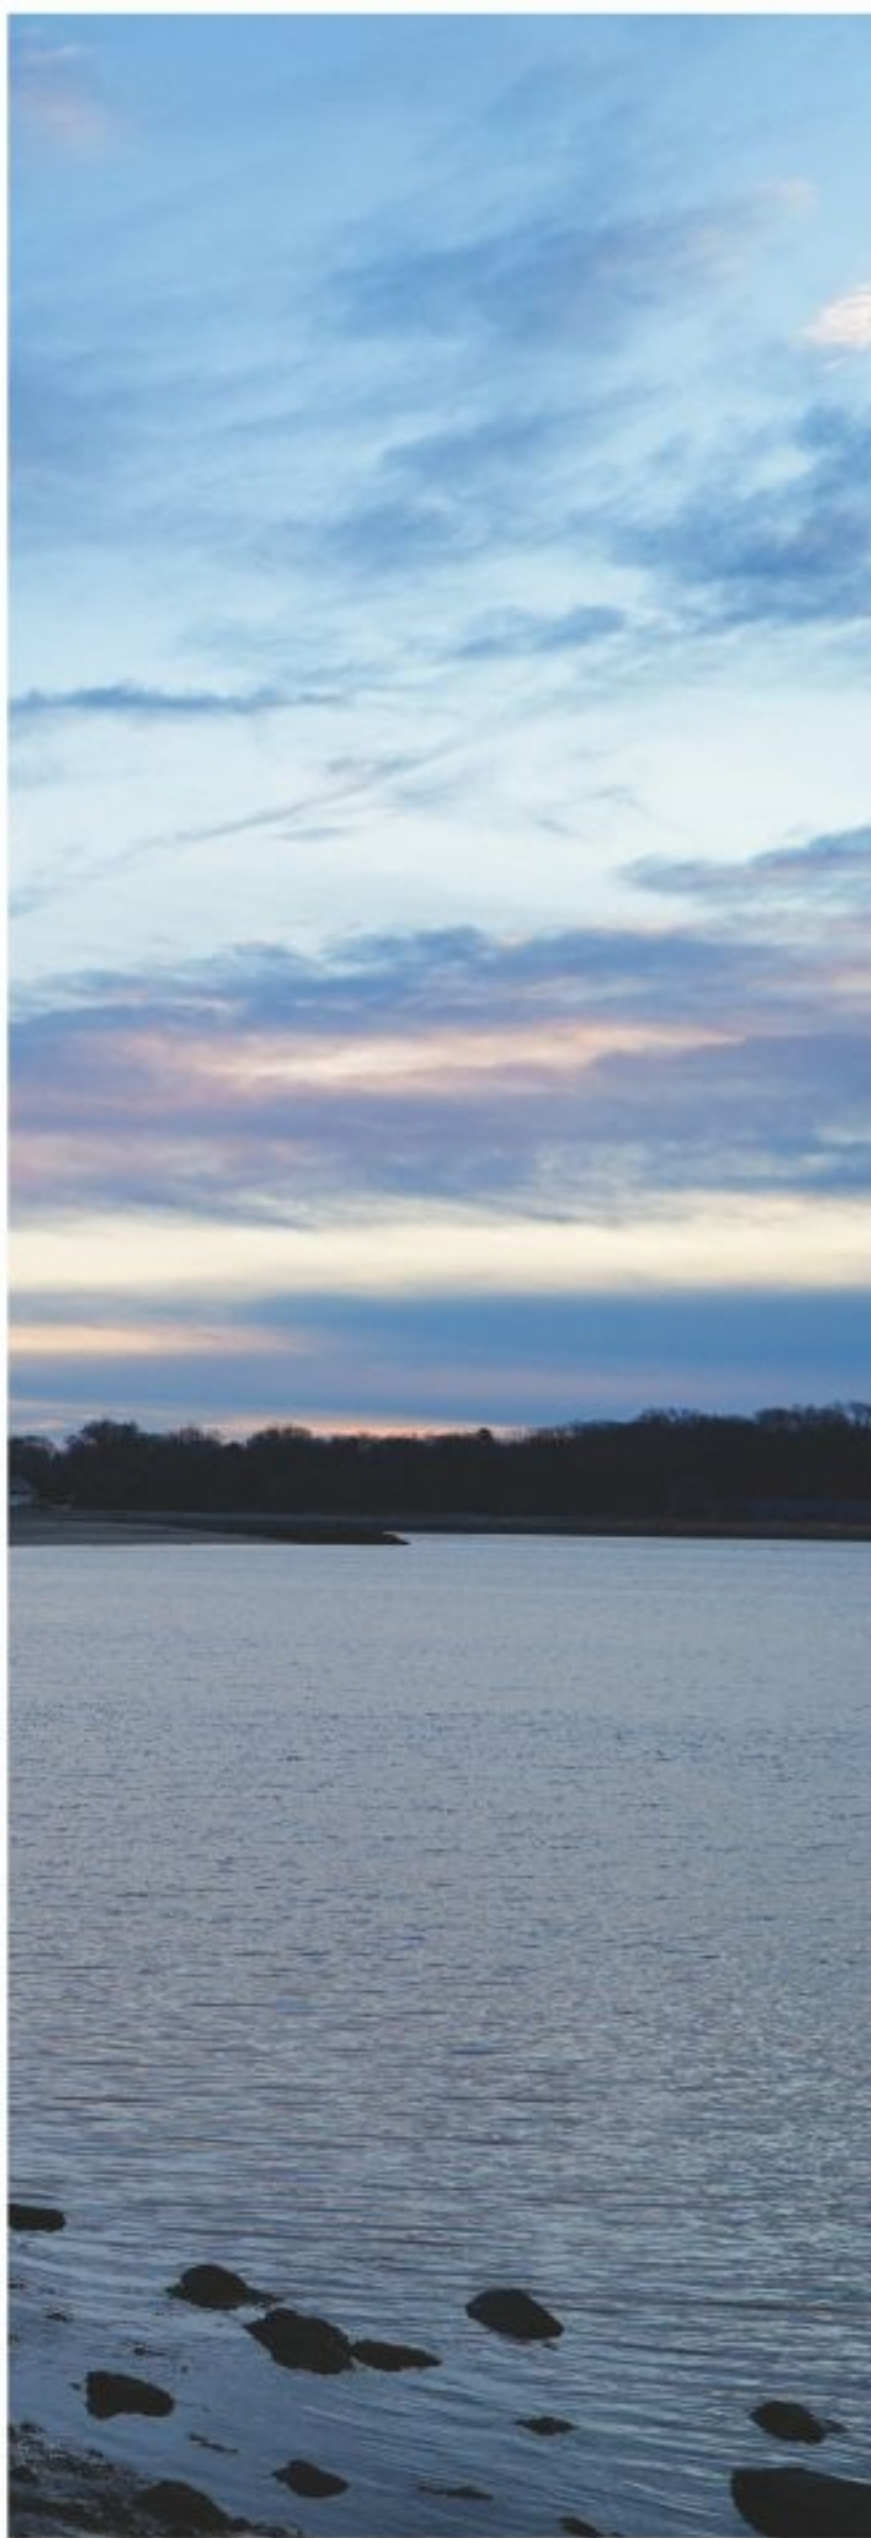

© WL81 5003

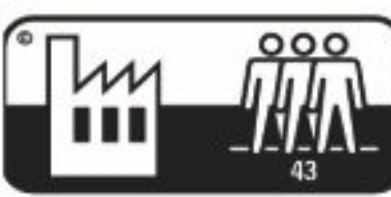

| Charcteristics                                                                                            | Standard              | Unit                                                                                                       | Result               |
|-----------------------------------------------------------------------------------------------------------|-----------------------|------------------------------------------------------------------------------------------------------------|----------------------|
| Type of flooring                                                                                          | ISO 10581 - EN 649    |                                                                                                            | Homogeneous Floor    |
| Material                                                                                                  |                       |                                                                                                            | Polyvinyl chloride   |
| Cover                                                                                                     |                       |                                                                                                            | Strengthen PUR       |
| Safety criteria                                                                                           |                       |                                                                                                            |                      |
| Flammability           | EN 13501-1            | class                                                                                                      | B <sub>fl</sub> - s1 |
| Sound                  | ISO 10140             | dB                                                                                                         | 3                    |
| Slip resistance        | DIN 51130             | group                                                                                                      | R9                   |
| Dynamic coefficient of friction                                                                           | EN 13893              | class                                                                                                      | DS                   |
| Performance behaviour                                                                                     |                       |                                                                                                            |                      |
| Sheet width            | ISO 24341 - EN 426    | m                                                                                                          | 2                    |
| Sheet length           | ISO 24341 - EN 426    | m                                                                                                          | 20                   |
| Overall thickness      | ISO 243416 - EN 428   | mm                                                                                                         | 2.0                  |
| Total weight           | ISO 23997 - EN 430    | g/m <sup>2</sup>                                                                                           | 2800                 |
| Wear resistance        | EN 649                | group                                                                                                      | T                    |
| Residual indentation   | ISO 24343 -1 - EN 433 | mm                                                                                                         | 0.02                 |
| Dimensional stability  | ISO 23999 - EN 434    | -                                                                                                          | X<0.4%, Y<0.4%       |
| Color fastness       | ISO 105 - B02         | rating                                                                                                     | ≥6                   |
| Resisistance to staining                                                                                  | EN 423                |                                                                                                            | No stain             |
| Electrical resistance                                                                                     | EN 1081               |                                                                                                            | >10 <sup>9-10</sup>  |
| Antibacterial        | ISO 22196             |                                                                                                            | Level 1              |
| Classification                                                                                            |                       |                                                                                                            |                      |
| Domestic                                                                                                  | ISO 10874 - EN 685    | class                                                                                                      | 23 heavy duty        |
| Commercial                                                                                                | ISO 10874 - EN 685    | class                                                                                                      | 34 very heavy duty   |
| Industrial                                                                                                | ISO 10874 - EN 685    | class                                                                                                      | 43 heavy duty        |
| Additional property                                                                                       |                       |                                                                                                            |                      |
| Castor Chair         | ✓                     | Antistatic Behaviour  | ✓                    |
| Underfloor Heating   | ✓                     | Chemical Resistance   | ✓                    |



#### ECO-Friendly Plasticizer

Adhering to the concepts of health, safety and environmental protection, Wolflor continuously optimizes and improves the raw material formula of PVC products. The products use environmentally friendly non-collar benzene plasticizers to provide safety protection for humans and the environment.



#### Optimal Indoor Air Quality

TVOC is a collective name for volatile organic compounds, which are mainly derived from the combustion products of fuel and the release of artificial products (such as interior decoration materials, coatings, furniture, flooring, etc.). The TVOC release of Wolflor products is almost zero, which is at the leading level in the industry and guarantees the best indoor air quality.

