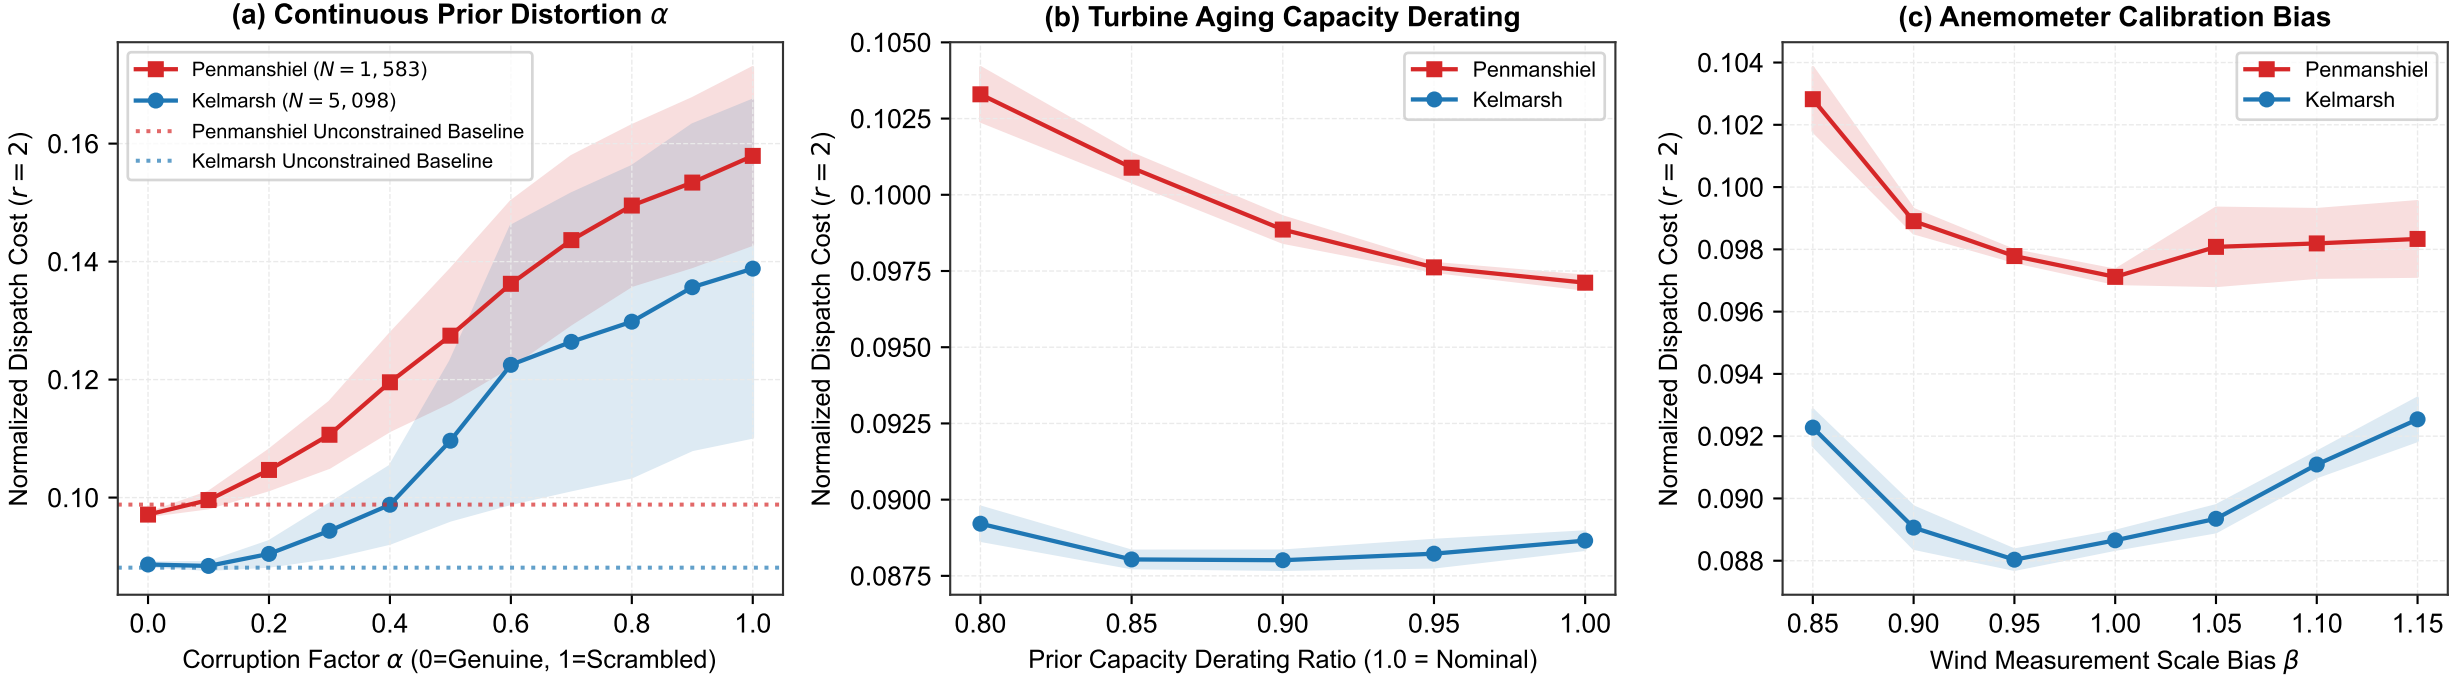
(a) Continuous Prior Distortion α
Penmanshiel (N = 1, 583)
Kelmarsh (N = 5, 098)
Penmanshiel Unconstrained Baseline
Kelmarsh Unconstrained Baseline
Normalized Dispatch Cost (r = 2)
0.10
0.12
0.14
0.16
0.0
0.2
0.4
0.6
0.8
1.0
Corruption Factor α (0=Genuine, 1=Scrambled)
(b) Turbine Aging Capacity Derating
Penmanshiel
Kelmarsh
Normalized Dispatch Cost (r = 2)
0.0875
0.0900
0.0925
0.0950
0.0975
0.1000
0.1025
0.1050
0.80
0.85
0.90
0.95
1.00
Prior Capacity Derating Ratio (1.0 = Nominal)
(c) Anemometer Calibration Bias
Penmanshiel
Kelmarsh
Normalized Dispatch Cost (r = 2)
0.088
0.090
0.092
0.094
0.096
0.098
0.100
0.102
0.104
0.85
0.90
0.95
1.00
1.05
1.10
1.15
Wind Measurement Scale Bias β