

Compact Spider Lift with Telescopic Boom

Telescopic Spider


Working Height
10.8 m

Lateral Outreach
6.2 m

Negative Reach
-2.0 m


Overall Weight
1535 kg

Working Envelope

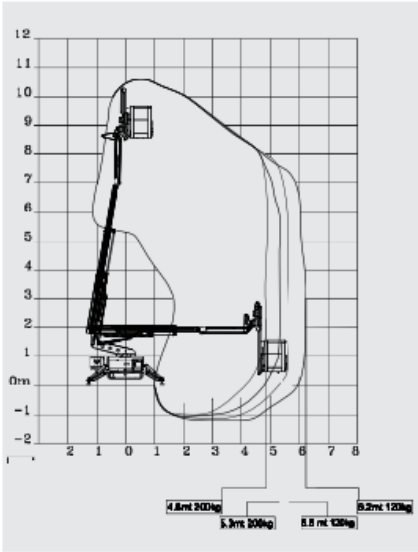

Unique Selling Points

- ✓ Innovative removable jib with specialized negative working capability
- ✓ Ultra-compact size fits through standard single doorways
- ✓ Transportable in standard freight elevators
- ✓ Blue-Lithium battery for quiet, emission-free operation
- ✓ Ideal for indoor maintenance in shopping malls, airports, and hotels
- ✓ Self-stabilizing system for quick setup on uneven surfaces

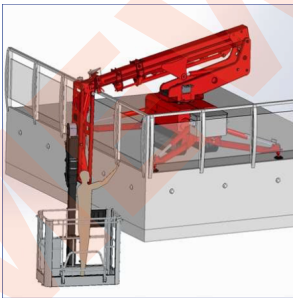

Technical Data

Basket size
1.3 m x 0.7 m x 1.1 m

Basket load
200 kg

Range of rotation
160°

Weight (disassembled Jib)
1295 kg

Travel speed, max.
1.5 km/h

Gradeability, max.
28%

Electric motor
48 V + Lithium ion battery

Ground pressure (complete)
38.03 kN/m²

Ground pressure (disassembled)
32.08 kN/m²

Ground pressure (working)
12.25 kN

Stowed Height
1.98 m

Stowed Width
0.78 m

Stowed Length With Basket
3.88 m

Stowed Length Without Basket
2.36 m

Fully Jacked Width
2.57 m

Key Features & Benefits

Ultra-compact dimensions for tight access

48V Lithium-ion power system

Superior negative reach capability

160° rotation for versatile positioning

Low ground pressure for delicate surfaces

Detachable jib system for transport

28% gradeability for rough terrain

Spider tracks for maximum stability

200kg basket capacity for tools & materials