

Working Height

10.8 m

Lateral Outreach

6.2 m



Negative Reach

-2.0 m

Overall Weight

1535 kg

Working Envelope

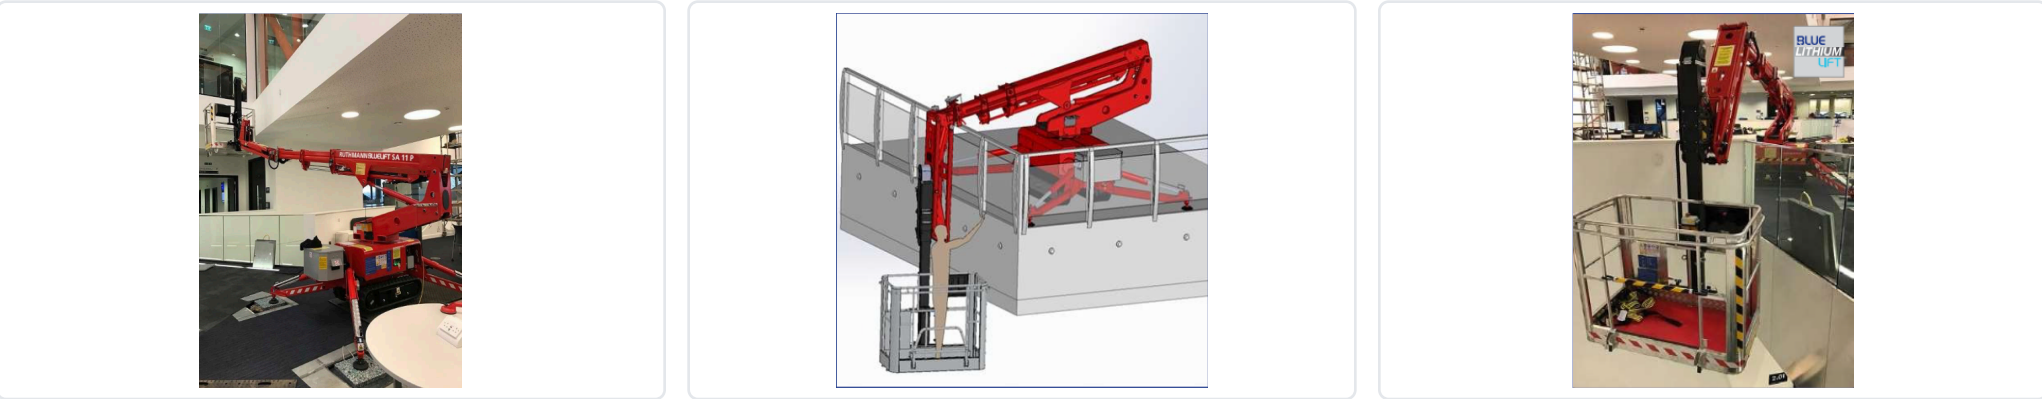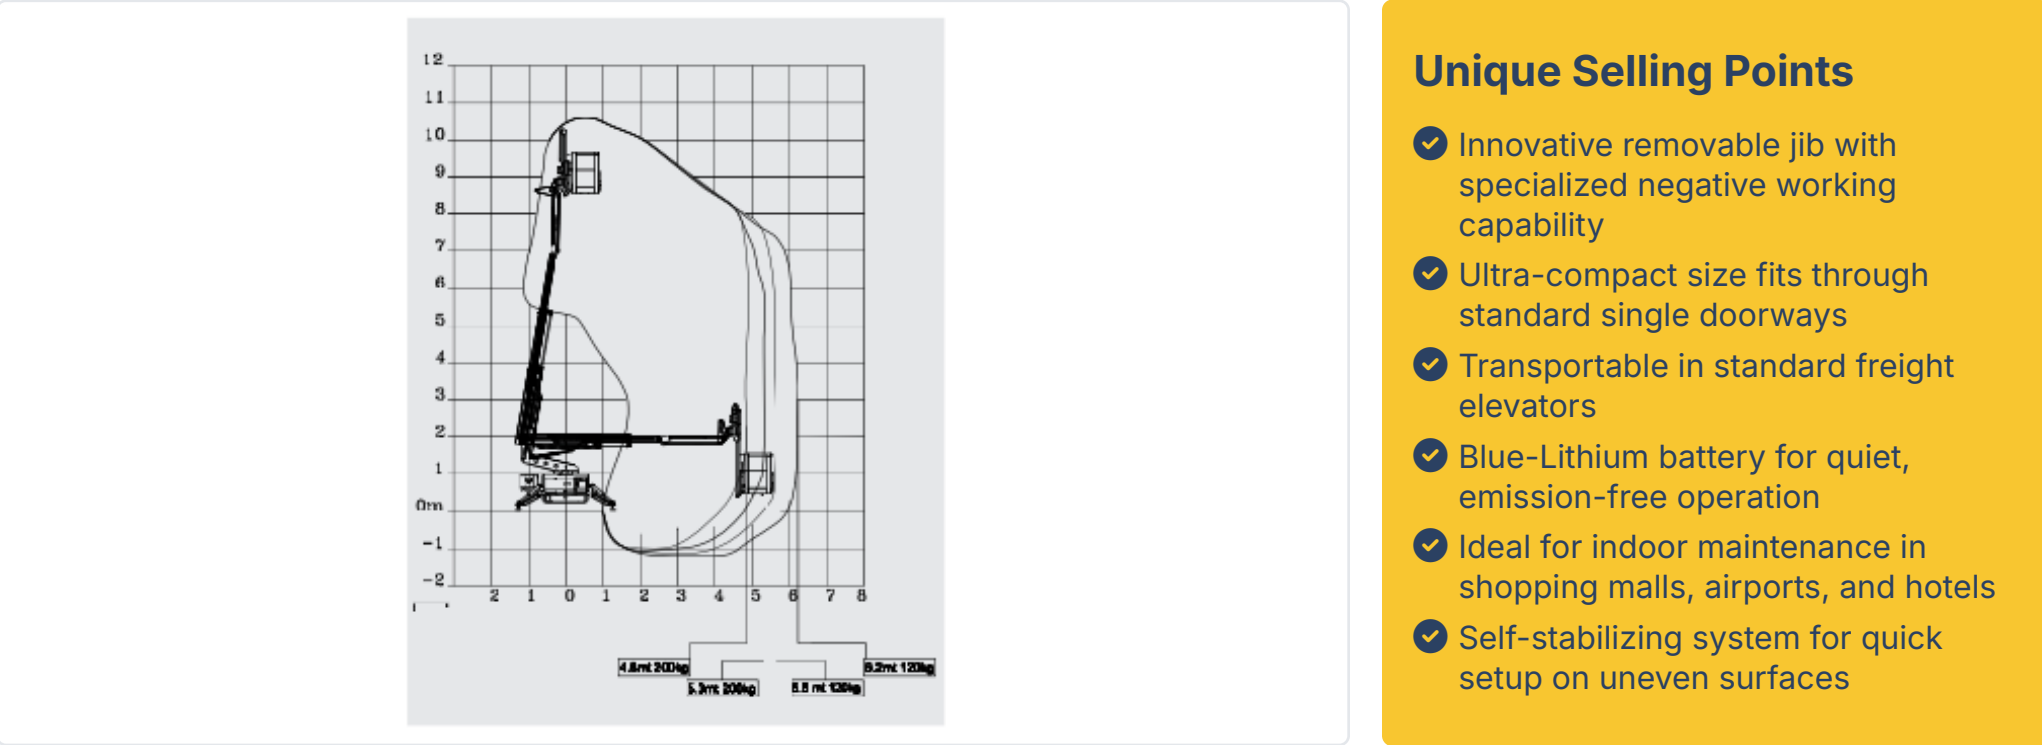

Technical Data

<div>Basket size</div> <div>1.3 m x 0.7 m x 1.1 m</div>	<div>Basket load</div> <div>200 kg</div>	<div>Range of rotation</div> <div>160°</div>
<div>Weight (disassembled Jib)</div> <div>1295 kg</div>	<div>Travel speed, max.</div> <div>1.5 km/h</div>	<div>Gradeability, max.</div> <div>28%</div>
<div>Electric motor</div> <div>48 V + Lithium ion battery</div>	<div>Ground pressure (complete)</div> <div>38.03 kN/m²</div>	<div>Ground pressure (disassembled)</div> <div>32.08 kN/m²</div>
<div>Ground pressure (working)</div> <div>12.25 kN</div>	<div>Stowed Height</div> <div>1.98 m</div>	<div>Stowed Width</div> <div>0.78 m</div>

★ Key Features & Benefits

- Ultra-compact dimensions for tight access

48V Lithium-ion power system

Superior negative reach capability
- 160° rotation for versatile positioning

Low ground pressure for delicate surfaces

Detachable jib system for transport
- 28% gradeability for rough terrain

Spider tracks for maximum stability

200kg basket capacity for tools & materials