

KINO D4 / CARRIER A0

Component—level draft + initial placement. No routed copper. NOT FOR FABRICATION.

Battery / NTC / USB coexistence / regulator compensation / final footprints and mechanical fit remain release gates.

P4 header and isolated control bus

File: 01_p4.kicad_sch

Camera 1 socket, power and signal isolation

File: 02_camera1.kicad_sch

Camera 2 socket, power and signal isolation

File: 03_camera2.kicad_sch

Camera 3 socket, power and signal isolation

File: 04_camera3.kicad_sch

Camera 4 socket, power and signal isolation

File: 05_camera4.kicad_sch

Camera enables and GPIO expansion

File: 06_controls.kicad_sch

Four camera currents and battery fuel gauge

File: 07_monitoring.kicad_sch

Motion, clock and board temperature

File: 08_sensors.kicad_sch

Cover, shutter and haptic interfaces

File: 09_controls.kicad_sch

USB—C PD sink and protected input

File: 10_usb_pd.kicad_sch

1S charger and battery entry

File: 11_charger.kicad_sch

5V boost and main load disconnect

File: 12_boost.kicad_sch

Hardware on/off and user indication

File: 13_power_button.kicad_sch

ERC supply declarations: Intended connector/regulator sources: see each symbol source note. Not a power—validation result.

GND

PACK_FUSED

MB_3V3

USB_VBUS

CHG_VBUS

SYS_5V

RTC_BACKUP

CAM1_SHUNT_OUT

CAM2_SHUNT_OUT

CAM3_SHUNT_OUT

CAM4_SHUNT_OUT

CAM1_3V3

CAM2_3V3

CAM3_3V3

CAM4_3V3

ENGINEERING DRAFT — NOT FOR FABRICATION

KINO








Sheet: /
File: KINO_D4_Carrier_A0.kicad_sch

Title: KINO D4 — four—XIAO carrier A0

Size: A2 Date: 2026—09—30
KiCad E.D.A. 10.0.6



















Rev: A0—DRAFT
Id: 1/14

P4 header and isolated control bus										
------------------------------------	--	--	--	--	--	--	--	--	--	--

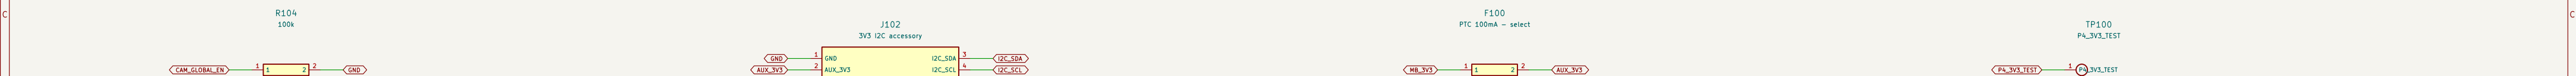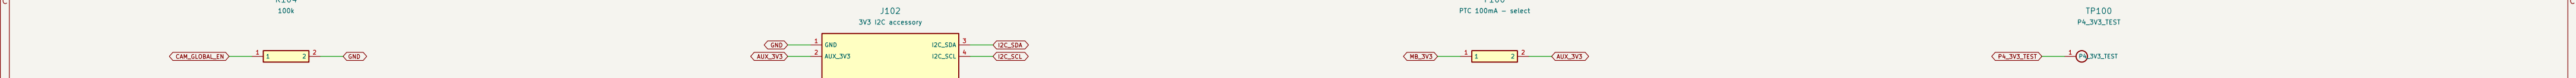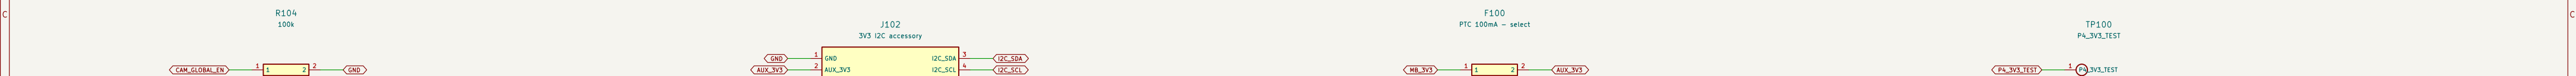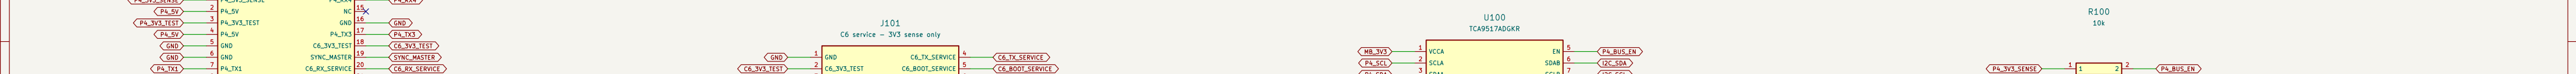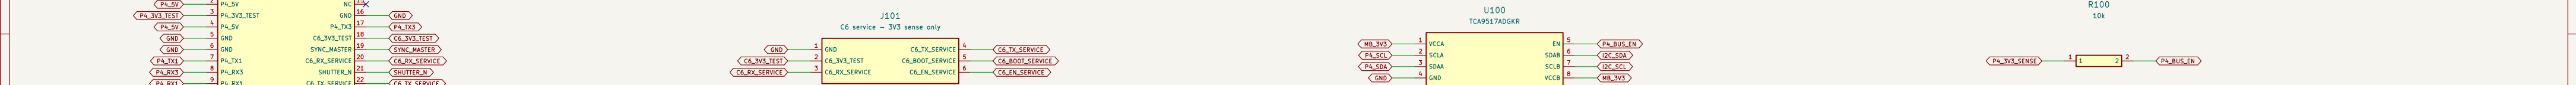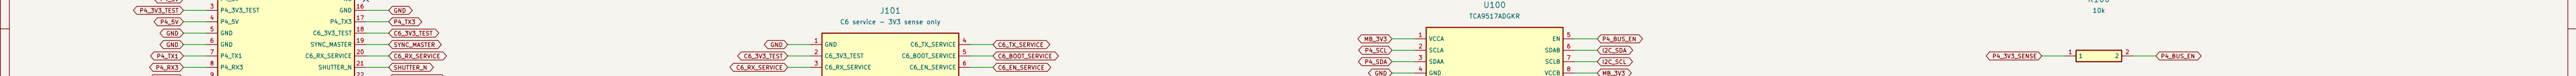

















Camera 1 socket, power and signal isolation

Remove the camera power link (0 ohm, JP) BEFORE connecting node USB. Row centres 15.24 mm from official Seeed PCB/footprint. Optical datum remains to be verified.

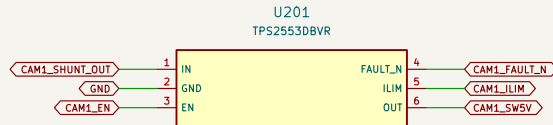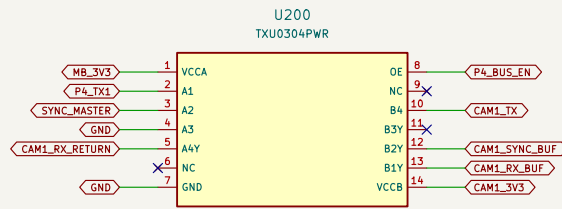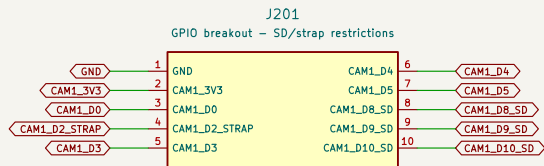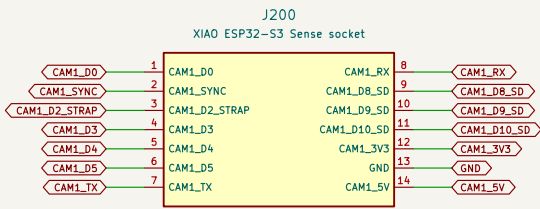




















	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	52
--	---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----

Remove the camera power link (0 ohm, JP) BEFORE connecting node USB. Row centres 15,24 mm from official Seeed PCB/footprint. Optical datum remains to be verified.

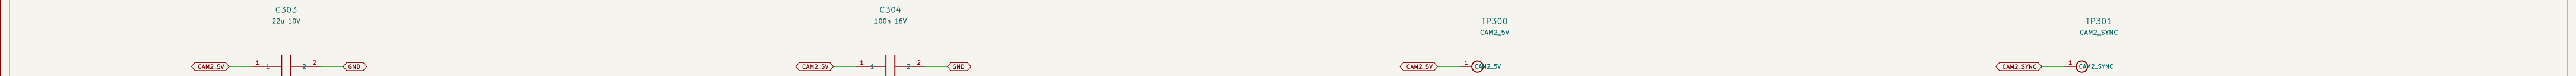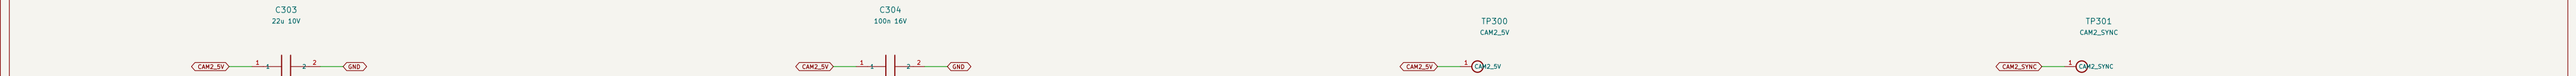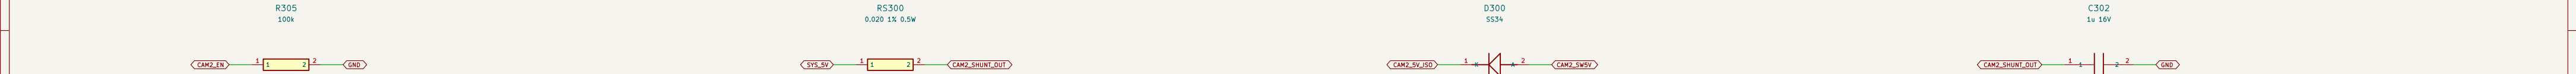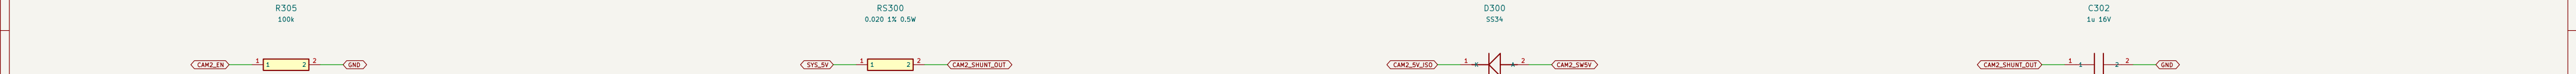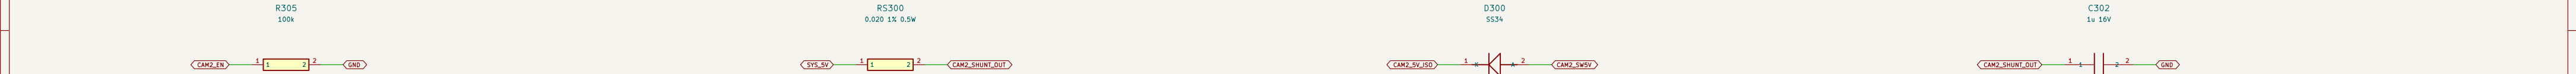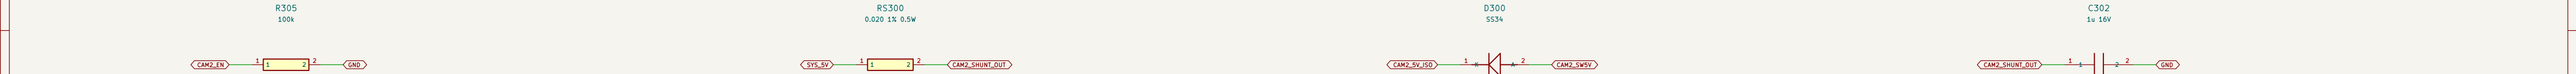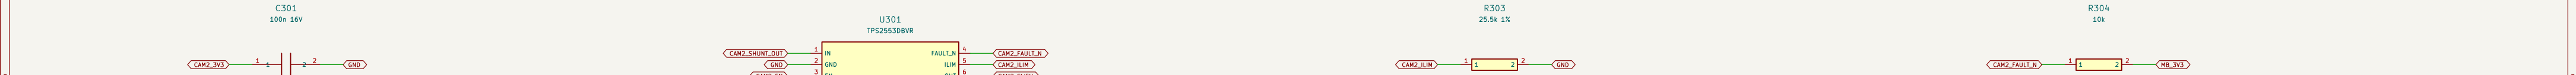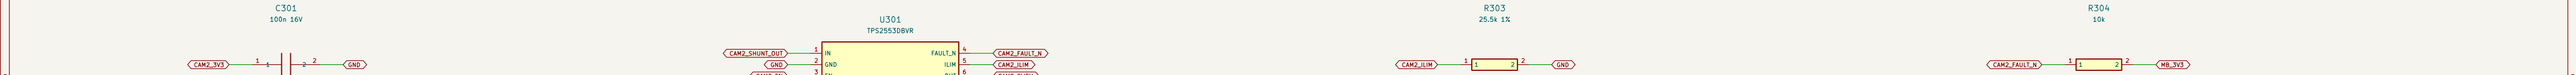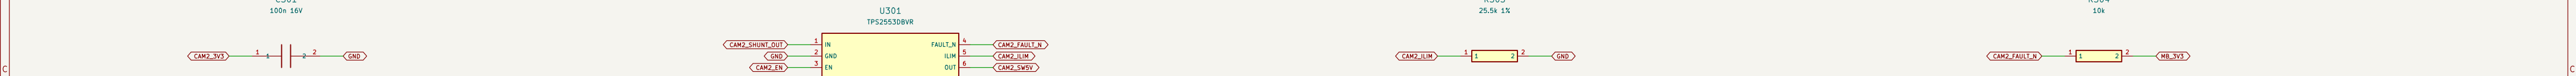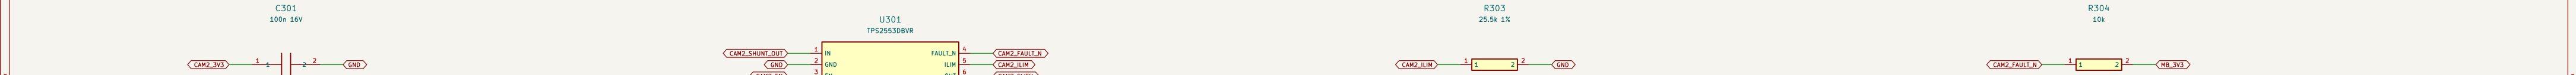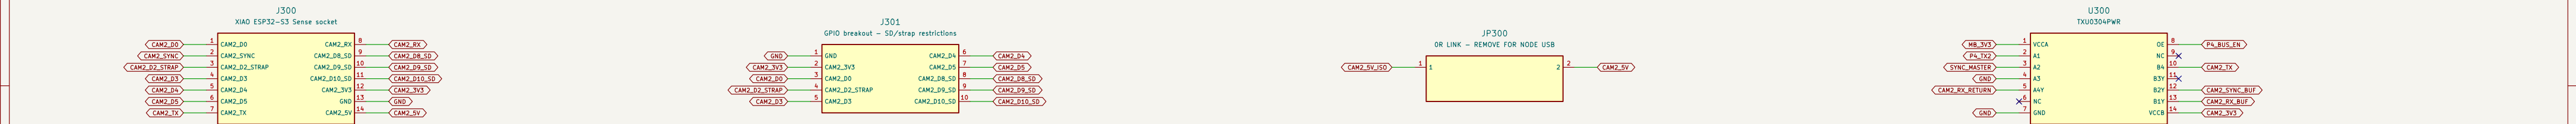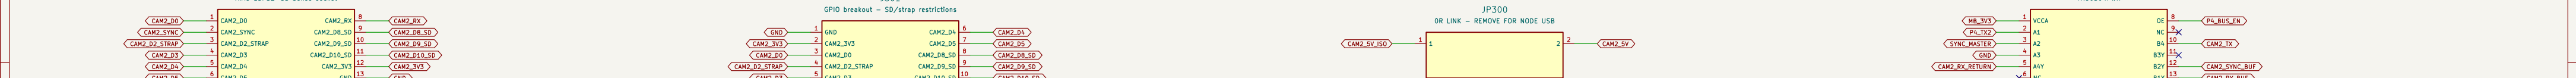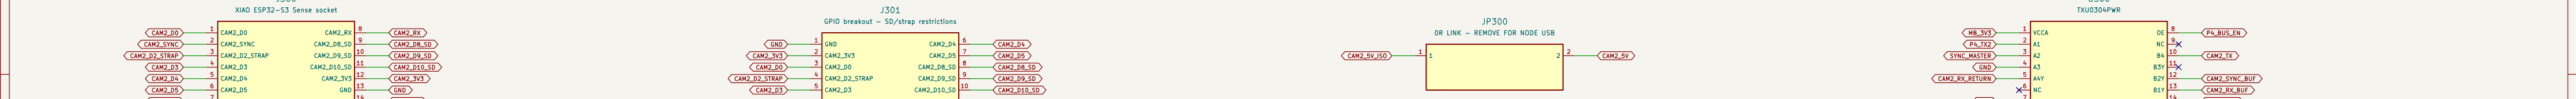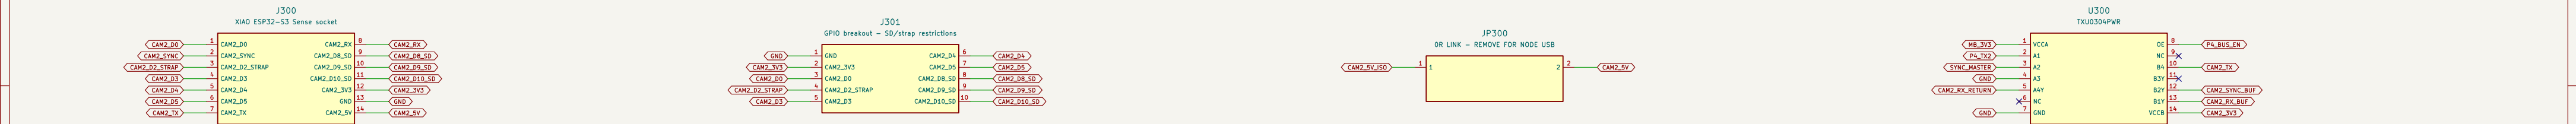

Camera 3 socket, power and signal isolation

Remove the camera power link (0 ohm, JP) BEFORE connecting node USB. Row centres 15.24 mm from official Seeed PCB/footprint. Optical datum remains to be verified.

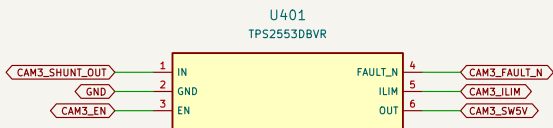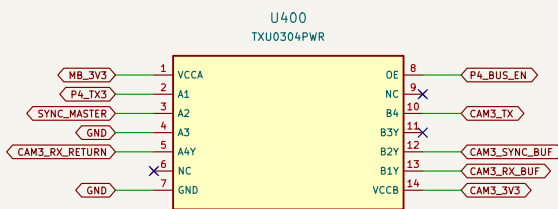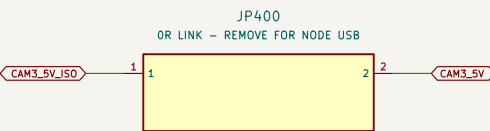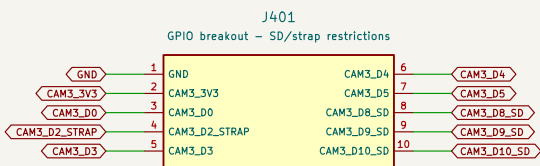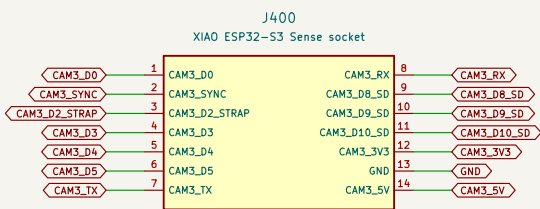

ENGINEERING DRAFT - NOT FOR FABRICATION

KINO

Sheet: /Camera 3 socket, power and signal isolation/

File: 04_camera3.kicad_sch

Title: Camera 3 socket, power and signal isolation

Size: A2 Date: 2026-09-30




















KiCad E.D.A. 10.0.6

Rev: A0-DRAFT

Id: 5/14











Camera 4 socket, power and signal isolation

Remove the camera power link (0 ohm, JP) BEFORE connecting node USB. Row centres 15.24 mm from official Seeed PCB/footprint. Optical datum remains to be verified.

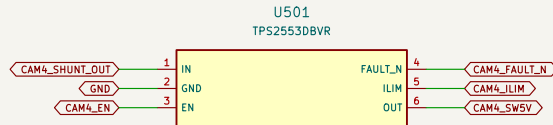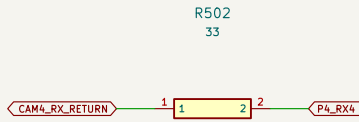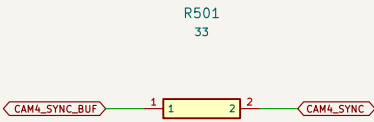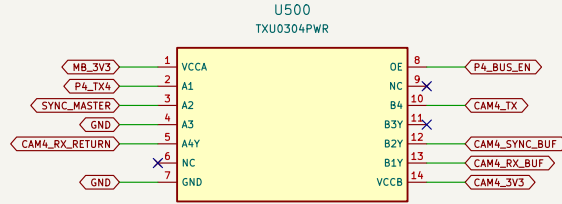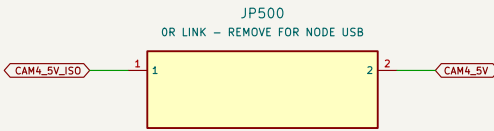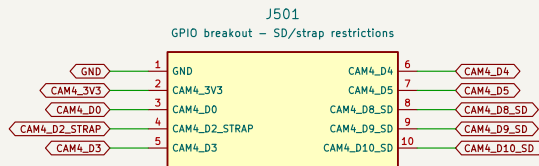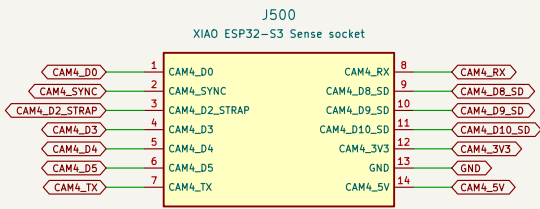








Camera enables and GPIO expansion

Camera outputs default off. Firmware must configure expander before enabling GPIO31. No spare P4 pin is consumed.

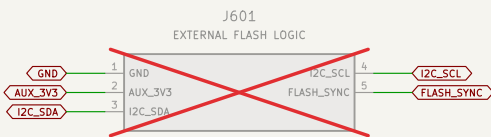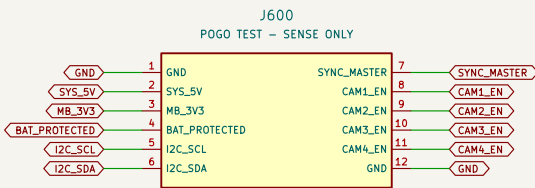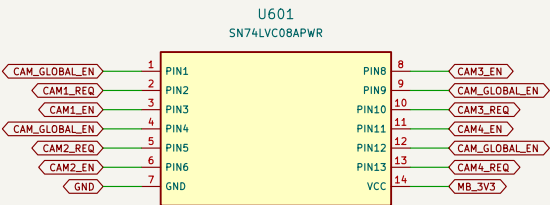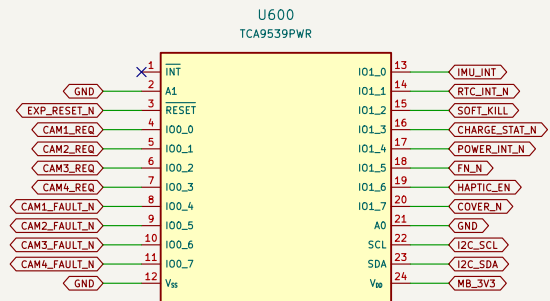










Four camera currents and battery fuel gauge

PAC1954 grounded ADDRSEL: 7-bit address 0x10; calibrate shunts. BQ27441 HIGH-SIDE 5 mOhm (T1 pins 7/8: SRP pack side, SRN system side). +/-25 mV range; 5 A = 25 mV. Gauge is factory--calibrated for 10 mOhm; firmware must write CC Gain for 5 mOhm.

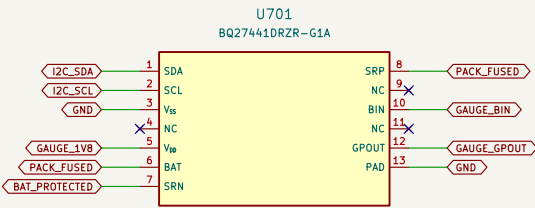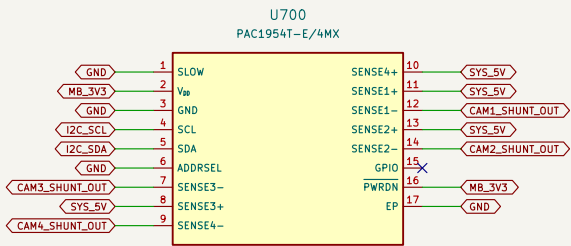

Motion, clock and board temperature

IMU mode 1: axes marked on PCB. RTC backup charging must stay disabled for primary cell. No always-on wake promise.

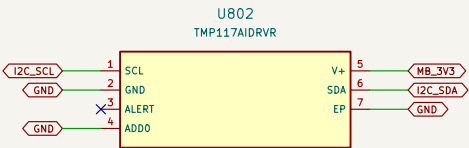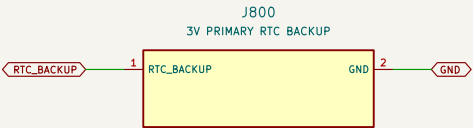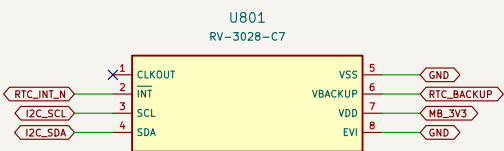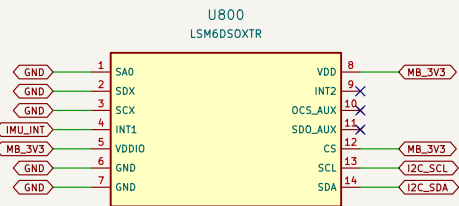

ENGINEERING DRAFT – NOT FOR FABRICATION

KINO

Sheet: /Motion, clock and board temperature/

File: 08_sensors.kicad_sch

Title: Motion, clock and board temperature

Size: A2

Date: 2026-09-30

















Rev: A0-DRAFT

KiCad E.D.A. 10.0.6

Id: 9/14

Cover, shutter and haptic interfaces

Passive dry-contact remote only. Haptic firmware must suppress vibration through exposure and settling. Motor MPN remains to be selected.

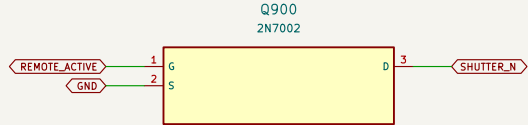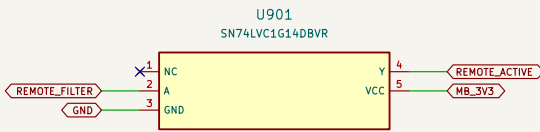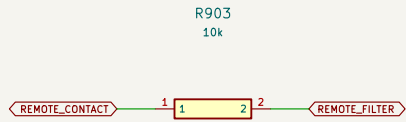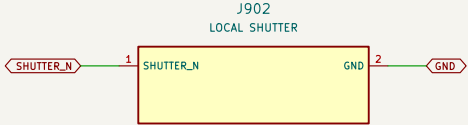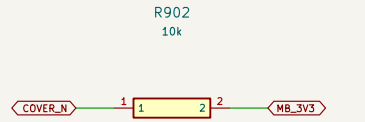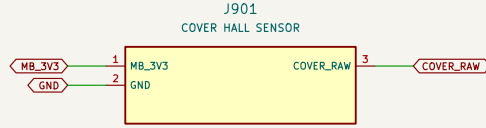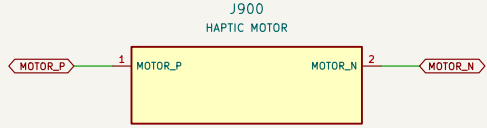

ENGINEERING DRAFT – NOT FOR FABRICATION

KINO

Sheet: /Cover, shutter and haptic interfaces/

File: 09_controls.kicad_sch

Title: Cover, shutter and haptic interfaces

Size: A2


Date: 2026-09-30

Rev: A0-DRAFT

KiCad E.D.A. 10.0.6

























Id: 10/14

Charge-only port. STUSB4500 NVM must be programmed for 5V fallback and 9V/2A. Protection and gate transient review OPEN.

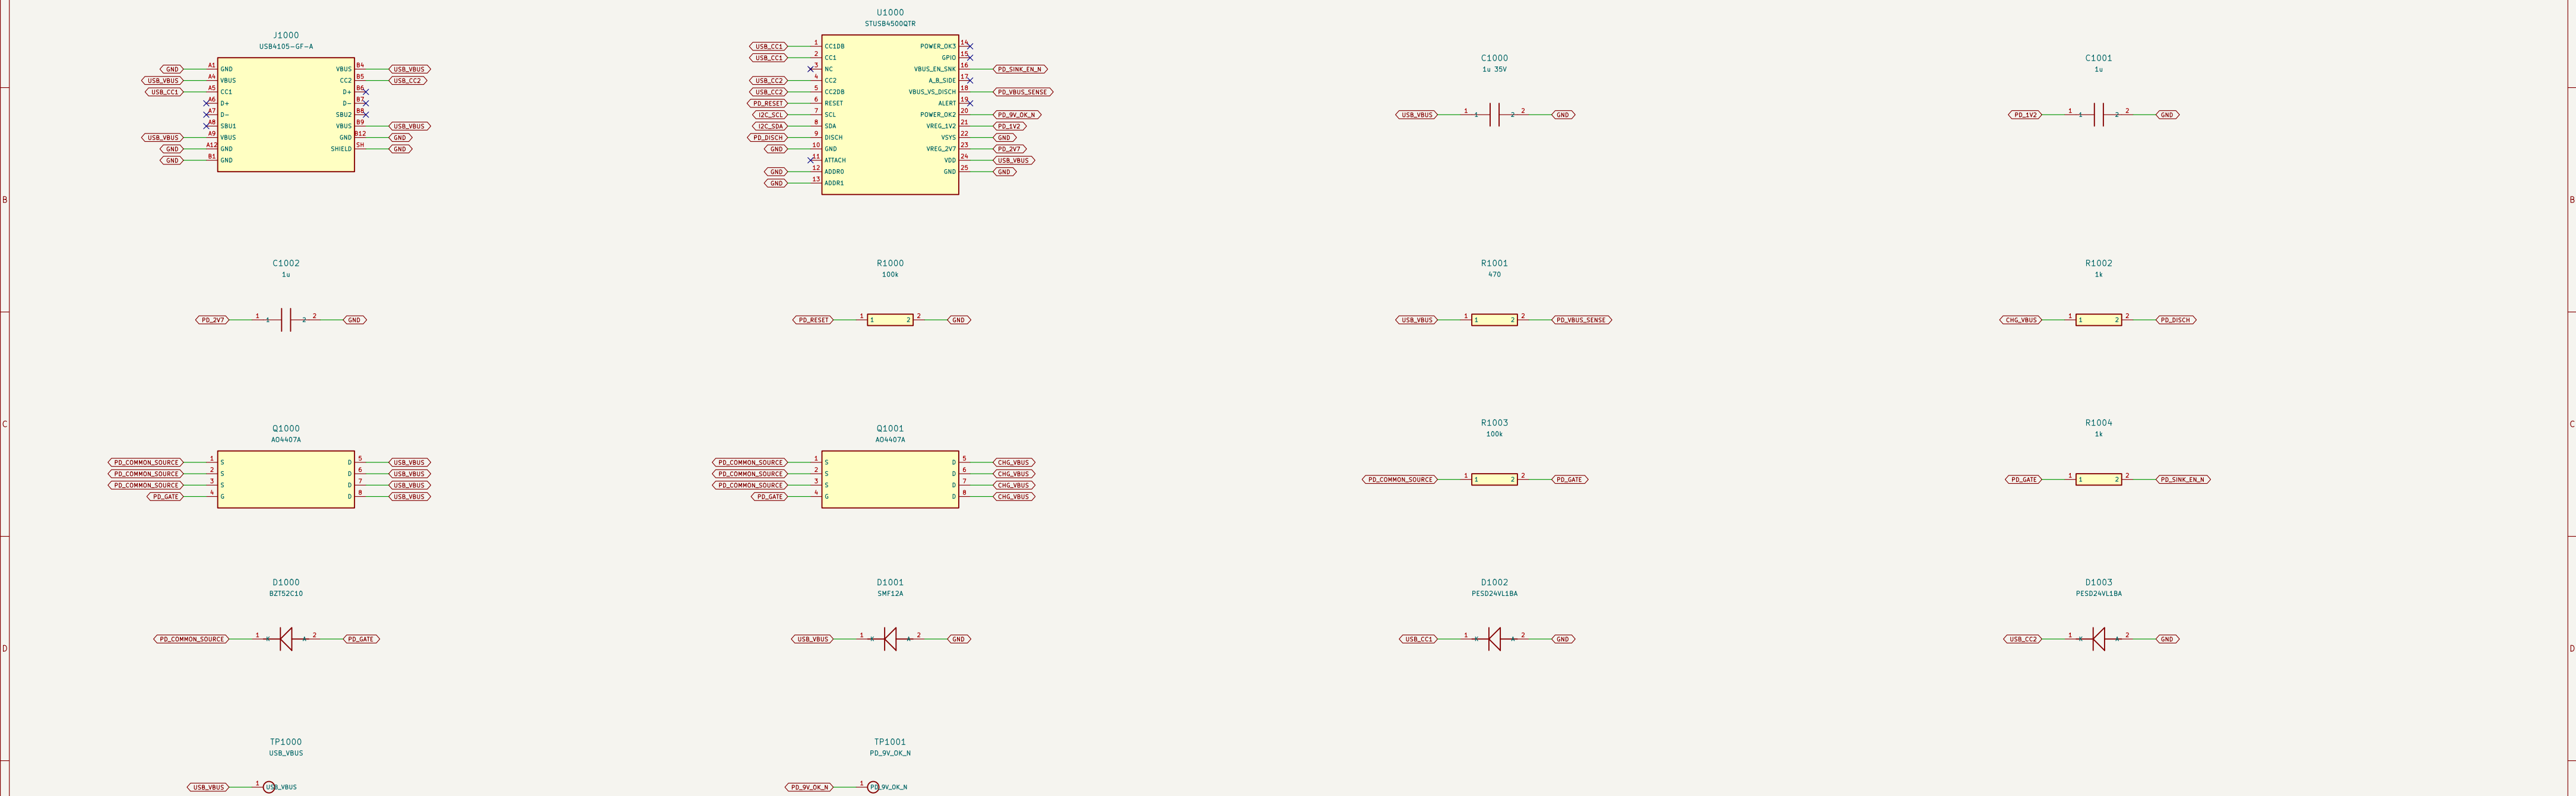





















1S charger and battery entry

CE pulled LOW charges with the camera off, POR defaults 4.2 V / 1 A (PROD 3.00h, TI latest 7-1/7-2), 103M-2 pack NTC, 1S window 1-60 C (I1 RT1 5.24u / RT2 30.31s). Open or shorted NTC suspends charge. FR B1110 only to inhibit charging at bring-up.

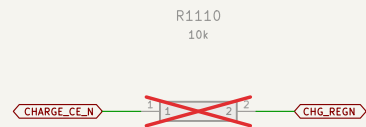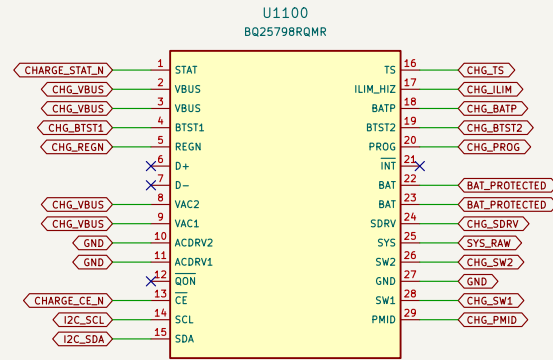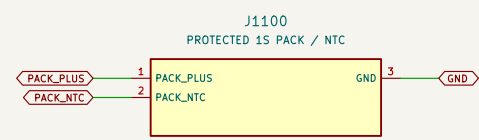

5V boost and main load disconnect

5V = 0.6*(1+110k/15k). L Isat 19.6 A > ILIM 17.1 A max (TI 9.2.2.2). Comp per TI eq 12-14; fc 8-16 kHz, PM > 68 deg over Co 50-110 uF, L +/-20 %, Vin 3.0-4.3 V. Calculated: measure loop on bench.

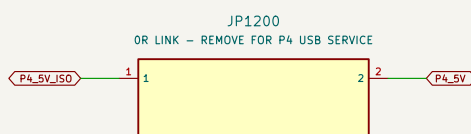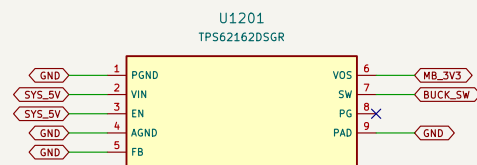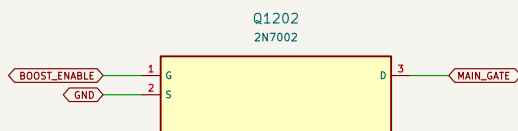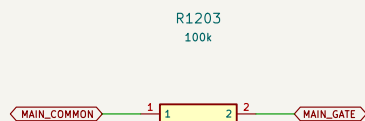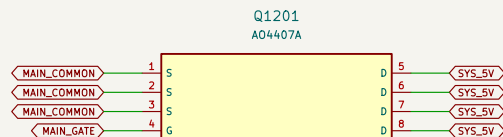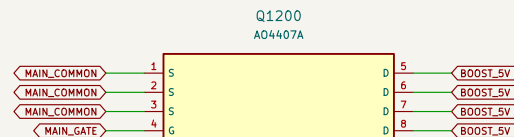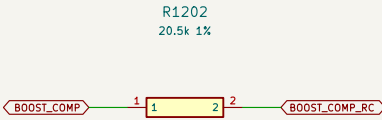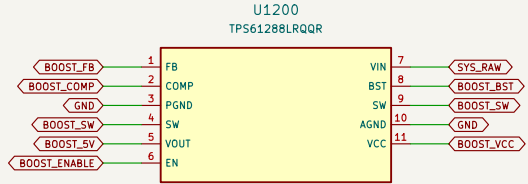

ENGINEERING DRAFT - NOT FOR FABRICATION

KINO

Sheet: /5V boost and main load disconnect/

File: 12_boost.kicad_sch

Title: 5V boost and main load disconnect

Size: A2

Date: 2026-09-30

Rev: A0-DRAFT

KiCad E.D.A. 10.0.6

Id: 13/14

Hardware on/off and user indication

Power controller T58 pin map checked against manufacturer package drawing: EN is pin 7. KILL is pulled high until software requests shutdown. Long-hold target remains provisional.

