


KINO A0 - P4 mounting template

DRAFT / PRINT AT 100% / DO NOT USE FIT-TO-PAGE

Carrier component-side view, P4 behind this sheet; do not mirror.

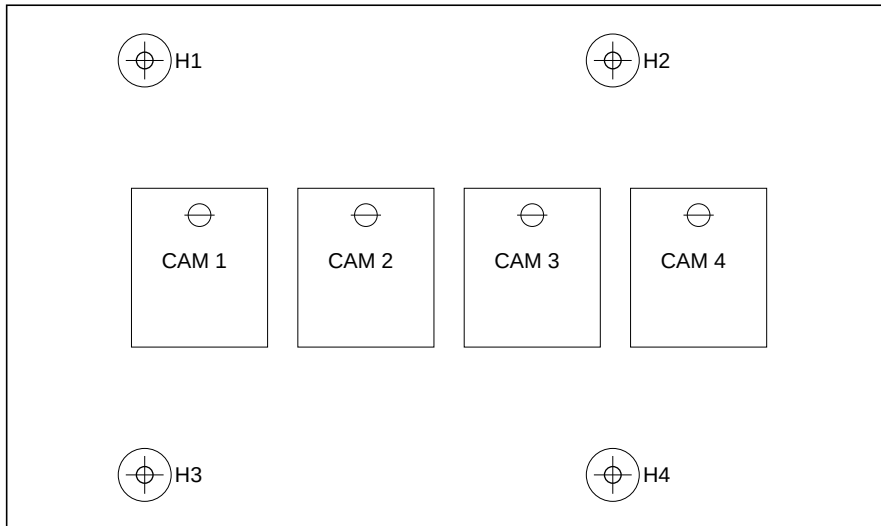

Outline: 117.01 x 69.41 mm. Four holes: diameter 2.2 mm for M2.

Inner insert pitch: 61.9 x 54.8 mm. Dashed circles: screw clearance.

Pattern offset: -9.3 mm in X, 0 in Y from module centre.

Offset is drawing-derived; physical fit and spacer height remain unverified.

Camera centres: 22.00 mm pitch / 66.00 mm outer span. Lens marks: CAD datum.

Hole centres from the carrier top-left (mm):

H1: X 18.255, Y 7.305

H2: X 80.155, Y 7.305


H3: X 18.255, Y 62.105

H4: X 80.155, Y 62.105

Use the INNER brass inserts, not the outer case screw pattern.

Extension spacers are needed to clear the P4 components and header.

Battery tray, cable access and final component placement are unfinished.



100.00 mm scale check

Source: Guition JC4880P443C_I_W/Y mechanical drawing;

insert pitch and M2 thread cross-checked against KINO bench records.