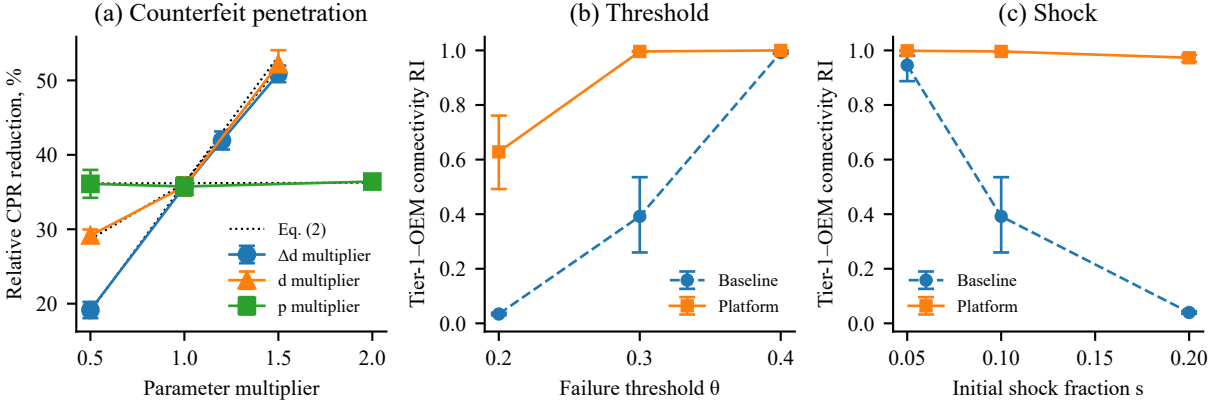
(a) Counterfeit penetration
Relative CPR reduction, %
50
40
30
20
0.5
1.0
1.5
2.0
Parameter multiplier
Eq. (2)
Δd multiplier
d multiplier
p multiplier
(b) Threshold
Tier-1–OEM connectivity RI
1.0
0.8
0.6
0.4
0.2
0.0
0.2
0.3
0.4
Failure threshold θ
Baseline
Platform
(c) Shock
Tier-1–OEM connectivity RI
1.0
0.8
0.6
0.4
0.2
0.0
0.05
0.10
0.15
0.20
Initial shock fraction s
Baseline
Platform