
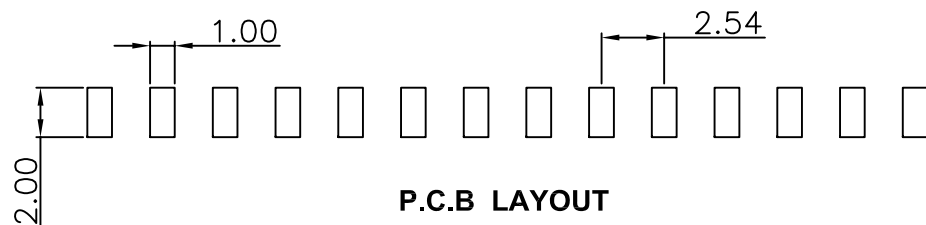
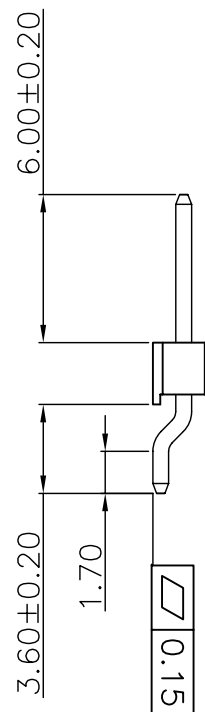
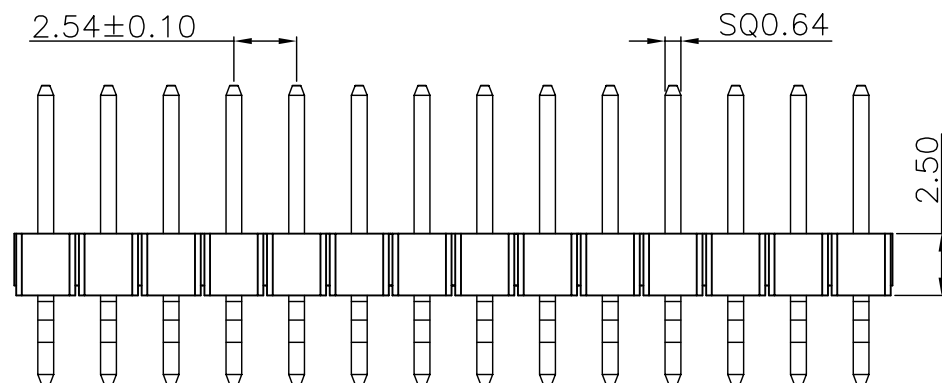


零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	D.Y.Y	2019-06-18

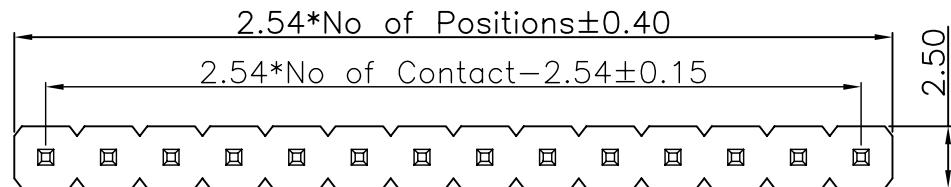

## Technical Data

Material:  
 Contact Material: Brass  
 Contact plating: Au Plated  
 Insulator Material: Black Polyester UL94V-0  
 Standard: See the part No.

Electrical:  
 Current rating: 3.0Amps/contact max.  
 Contact resistance:  $\leq 20\text{m}\Omega$ /contact  
 Insulation resistance:  $\geq 1000\text{M}\Omega$  at V=100V  
 Withstanding Voltage: 1000V AC/minute

Mechanical:  
 Mechanical life cycle: min.200  
 Operating temperatures: Gold Plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C  
 Soldering temperature: +220°C max(PBT)  
 +260°C max(PA6T)

P120	11	XXX	XX	H	X	X	N	H004
Product Descriptions P120 H=2.5	Product Type 11 Single row	No. of Positions XXX Poles	Pin Plating G0 Gold Flash	Angle options H 卧式SMT	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural		Pin length(mm) L=12.40mm

TOLERANCE	DATE :	2019-06-18	TITLE: 2.54mm Pin Header Single Row Length 12.4mm	
ANGLE $\pm 5^\circ$	DRAWN :	D.Y.Y	PART NO: P12011XXXXXXHXXNH004	
X.XXX $\pm 0.15$	CHECKED :			
X.XX $\pm 0.25$	APPROVED :			
X.X $\pm 0.40$	PROJECTON		REV: A0	UNIT: mm
X. $\pm 0.50$			SCALE: 1:1	SIZE: A4
			PAGE: 1/1	