




USB-C input

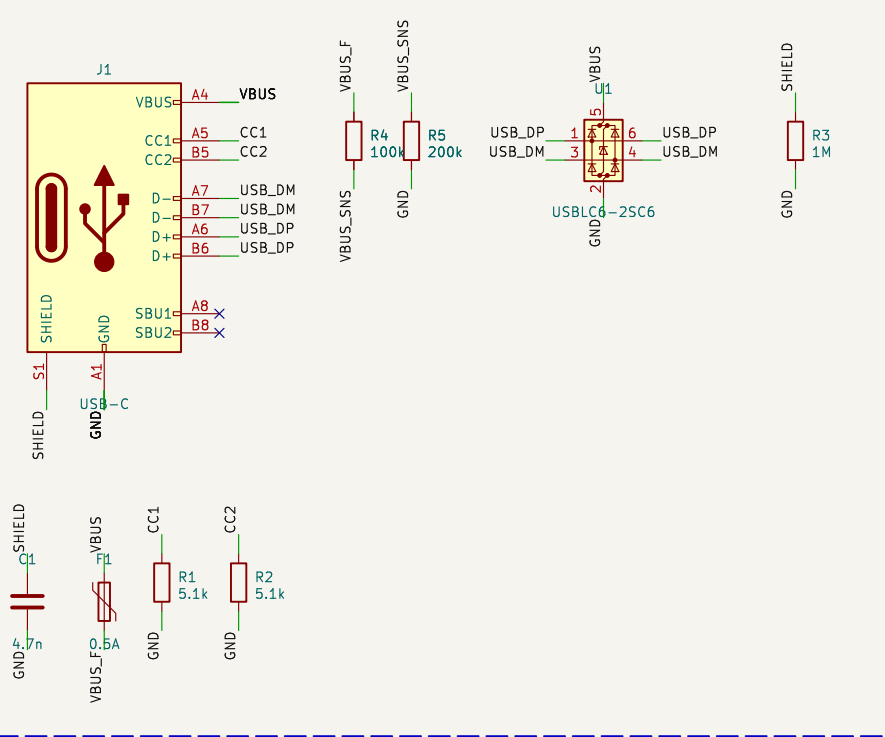


Li-Ion charger + power path

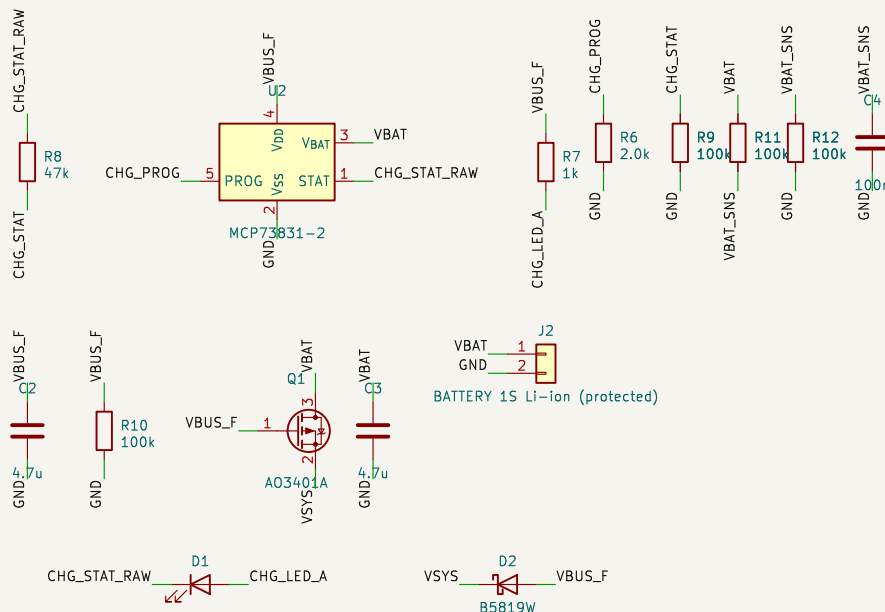


Soft power + button

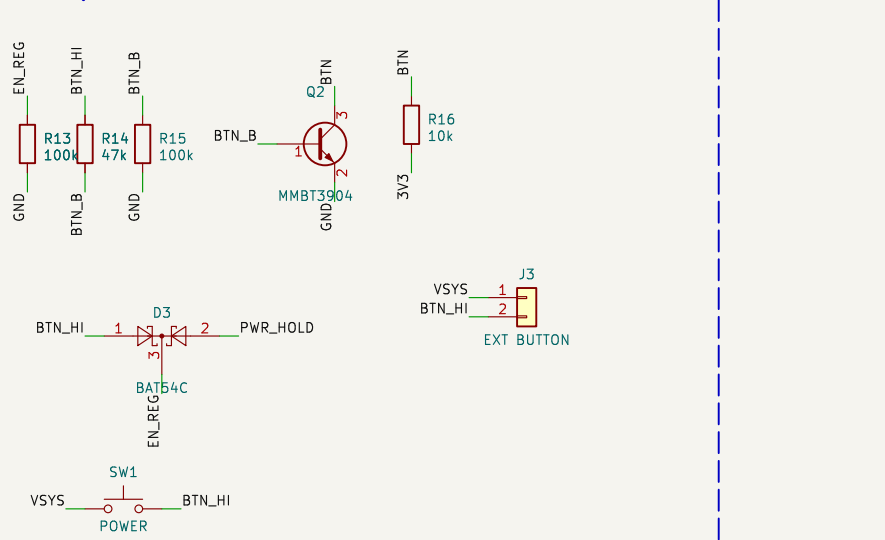


3.3 V buck-boost + 2.8 V analog LDO

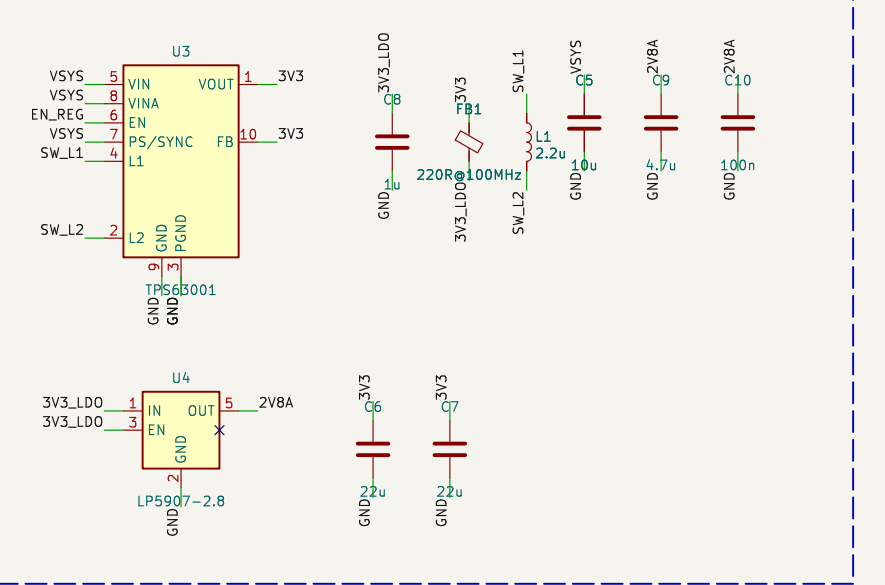


MCU STM32H743

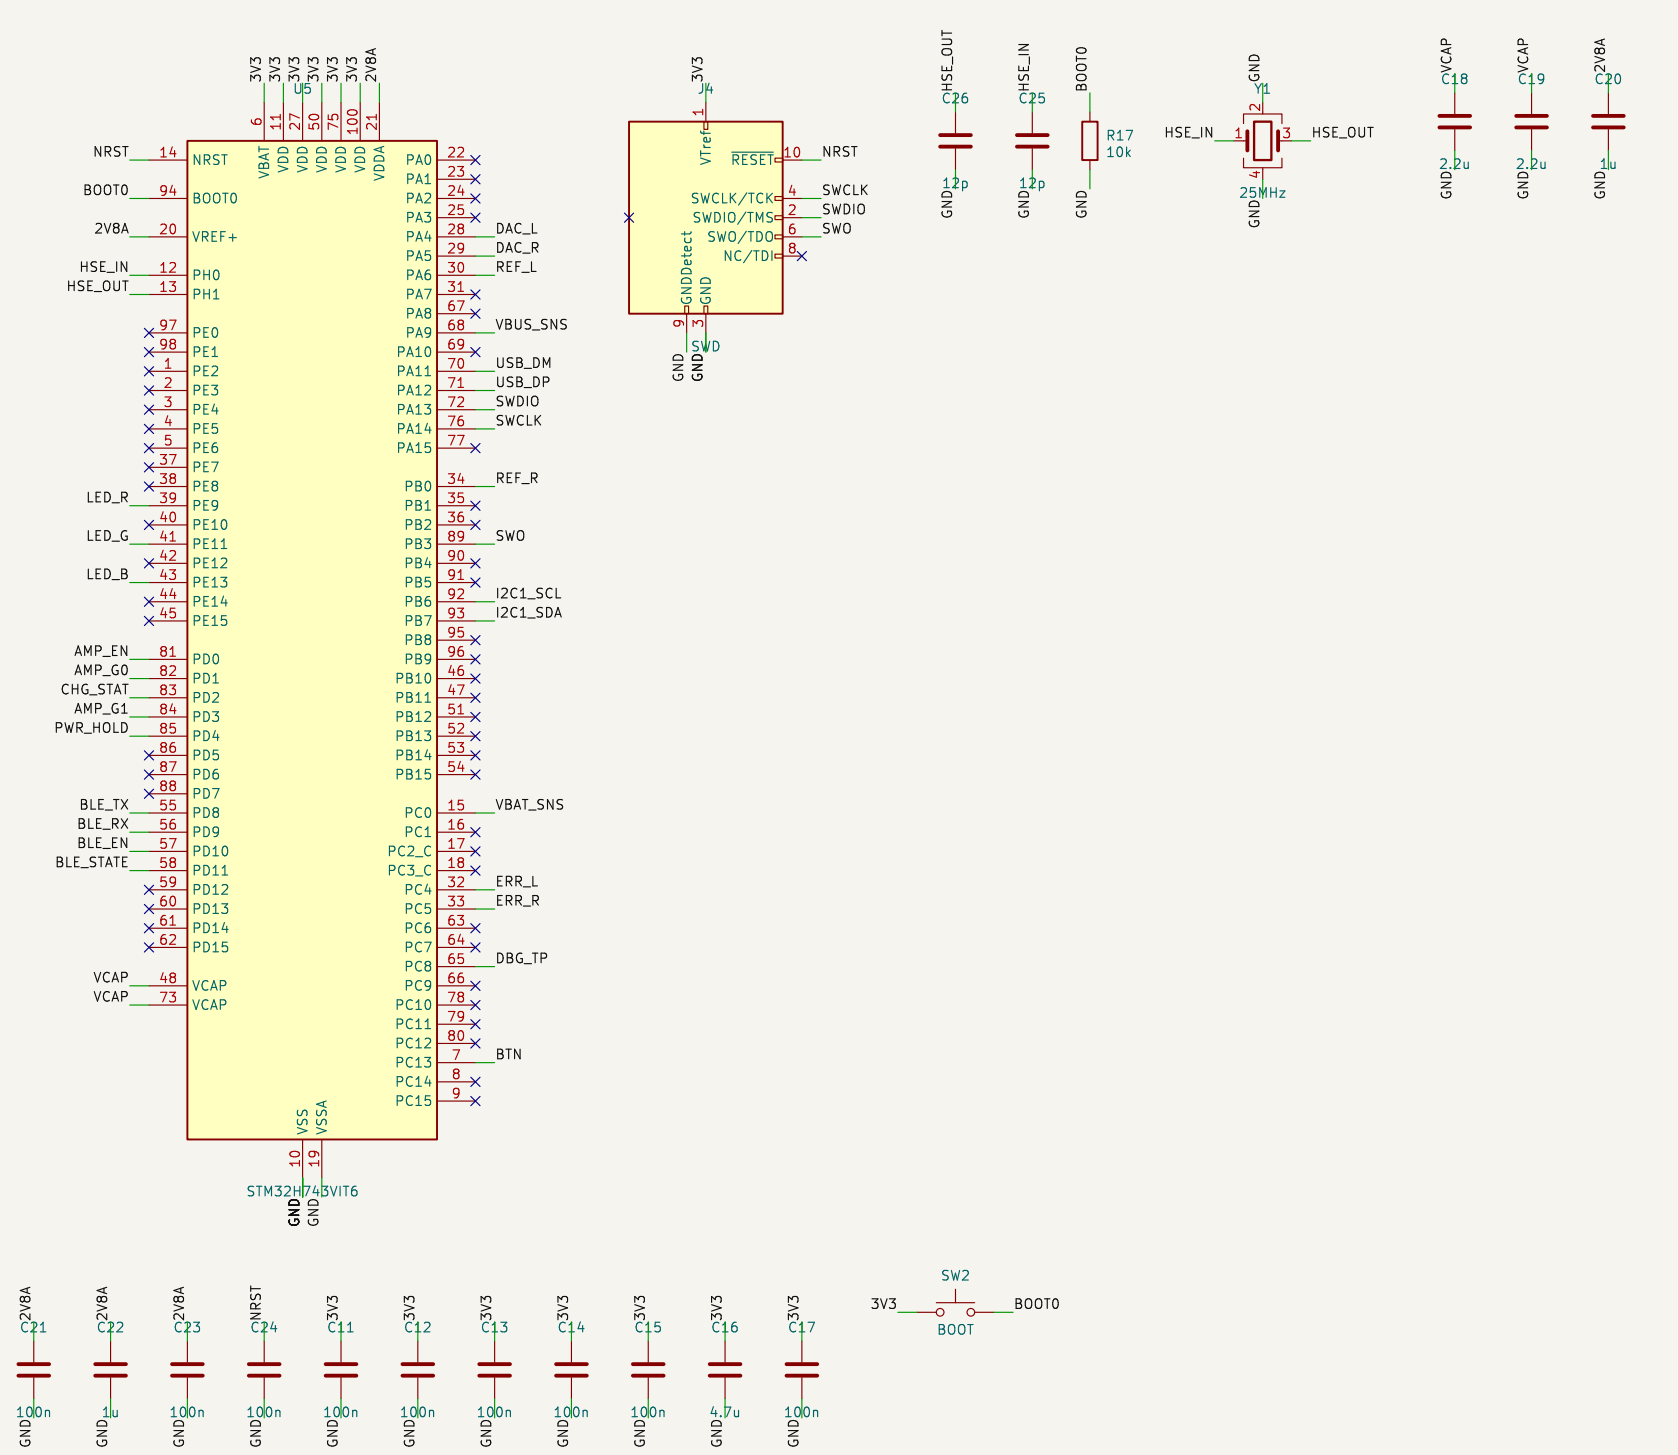


DAC reconstruction + headphone amplifier

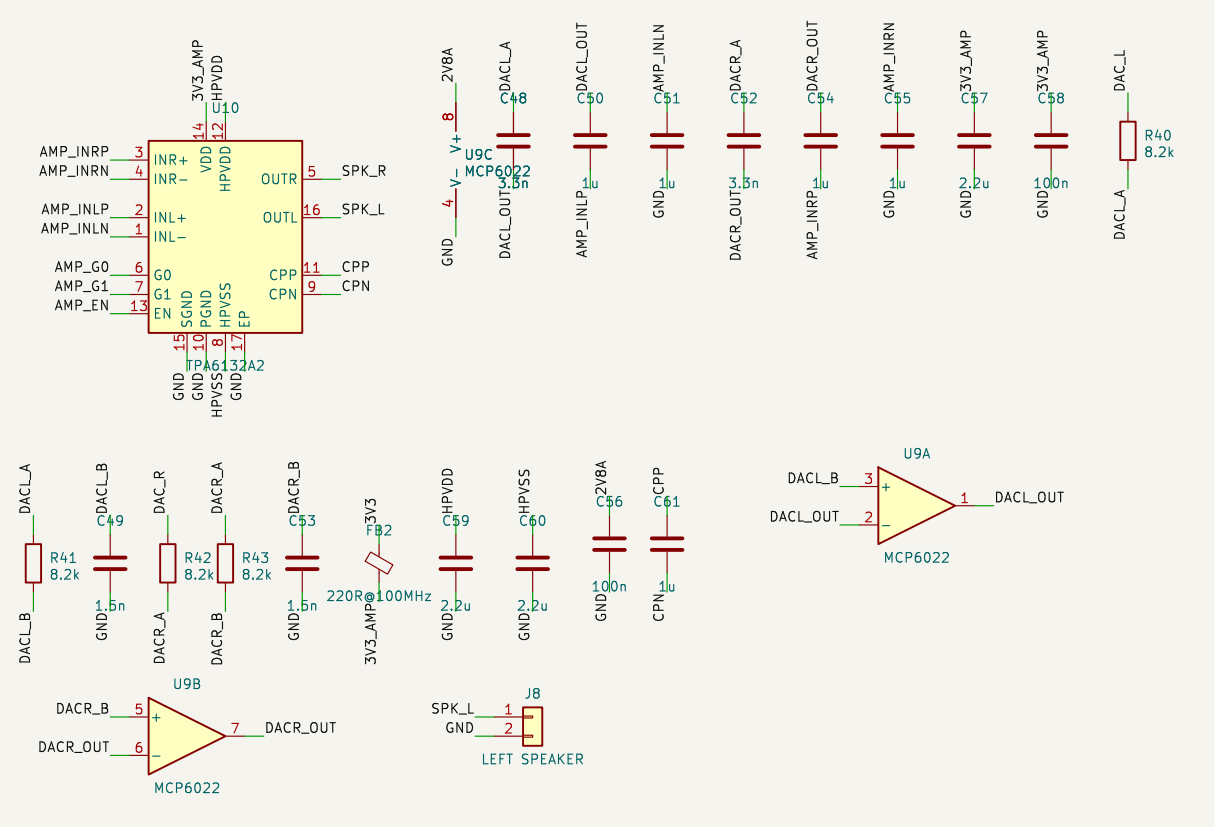


BLE module header (optional)

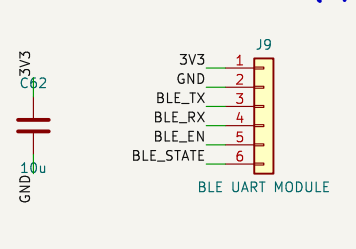


Mounting

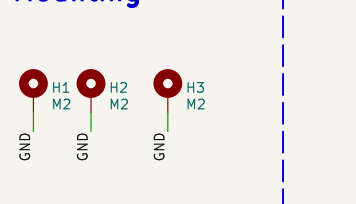


Status LEDs + test points

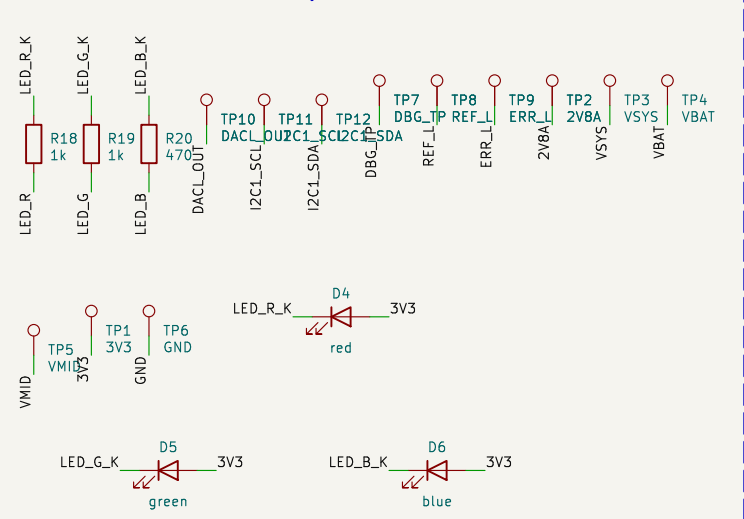

Analog bias (VMD) + left mic front-ends

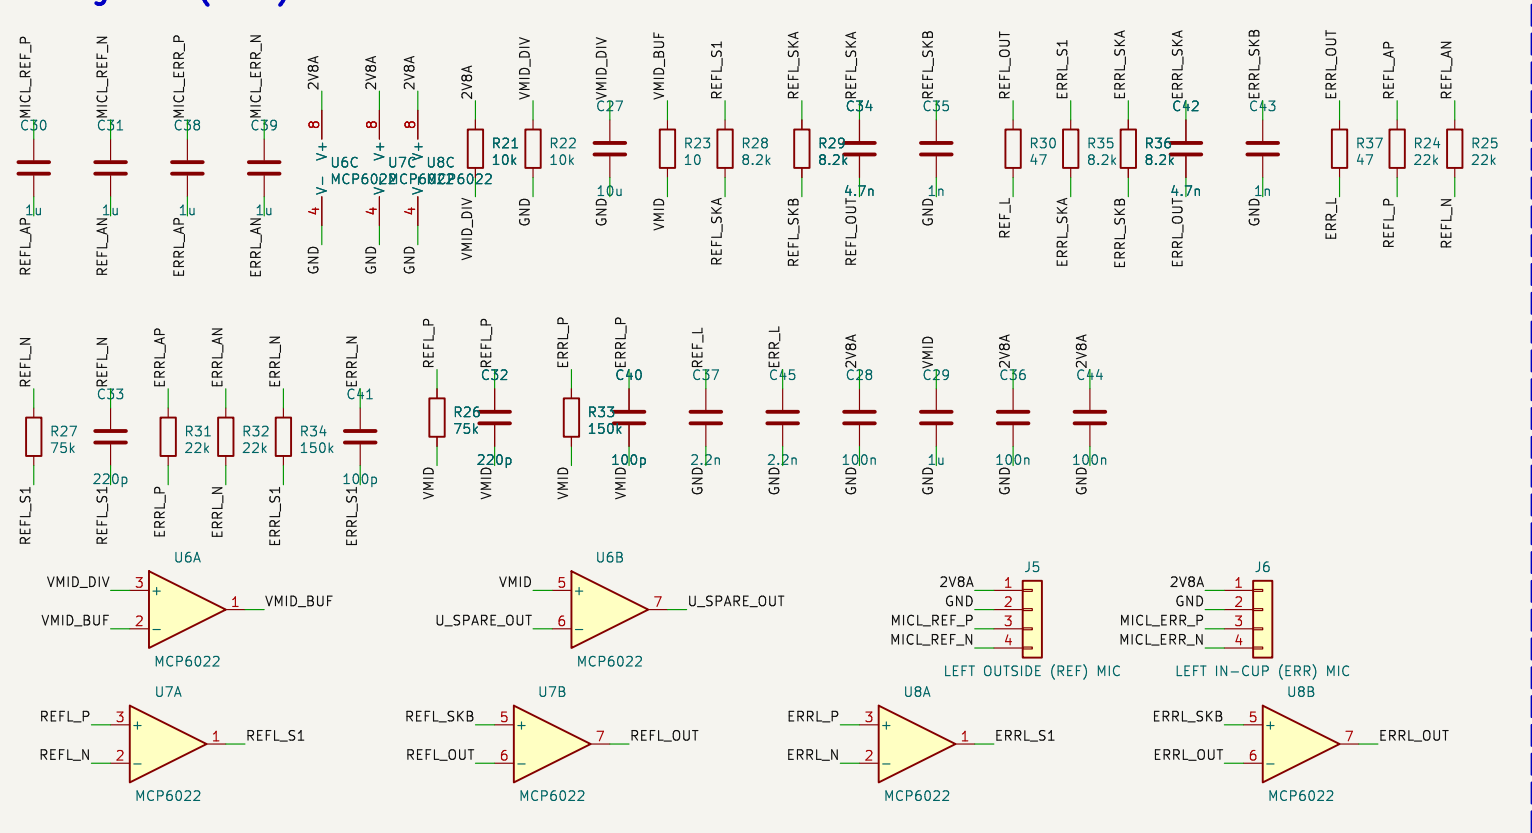

Right earcup cable + ADC inputs

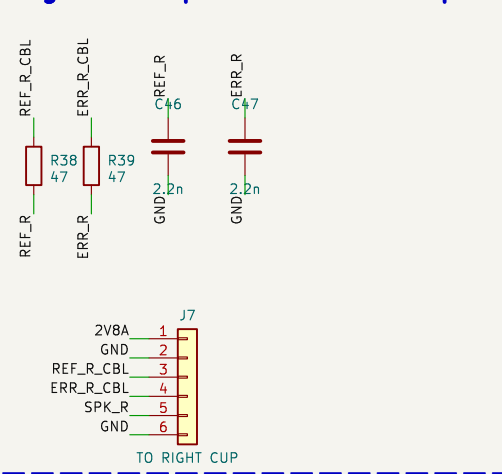

Power flags (ERC)

