


ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804+A1

Owner of the Declaration	Sager AG
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-SAR-20200275-CBA2-EN
Issue date	05/11/2021
Valid to	04/02/2026

PIPELANE pipe sections from glass wool, bonded with phenolic resin
Sager AG

www.ibu-epd.com | <https://epd-online.com>

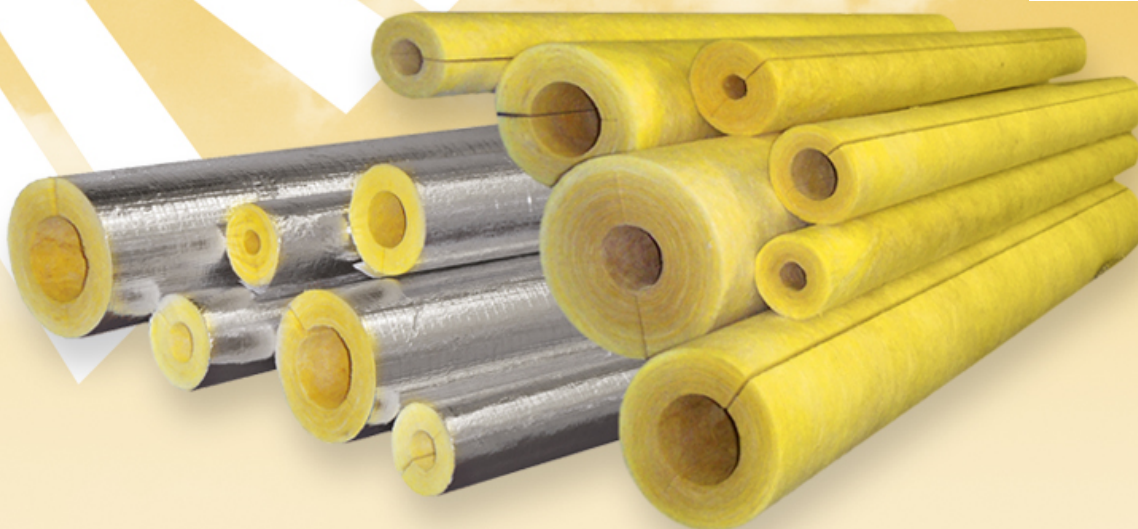

General Information

Sager AG

Programme holder

IBU – Institut Bauen und Umwelt e.V.
 Panoramastr. 1
 10178 Berlin
 Germany

Declaration number

EPD-SAR-20200275-CBA2-EN

PIPELANE pipe sections

Owner of the declaration

Sager AG
 Dornhügelstrasse 10
 CH-5724 Dürrenäsch

Declared product / declared unit

1 kg uncoated PIPELANE glass wool, bonded with phenolic resin.

The data per kg can be extrapolated to the quantity of a specific product used as density x thickness.

The appendix contains values for the following coatings per m², which can be added to the life cycle assessment values of the uncoated product:

- Glass fleece natural (0.035 kg/m²)
- Glass fleece natural (longitudinally reinforced) (0.055 kg/m²)
- Glass fleece natural (0.100 kg/m²)
- Glass fleece black (0.060 kg/m²)
- Glass fabric (0.128 kg/m²)
- Pure aluminium, grid-reinforced (0.079 kg/m²)
- Kraft paper (0.105 kg/m²)
- Alu/PET/Alu/PE (0.125 kg/m²)

This declaration is based on the product category rules:

Mineral insulating materials, 12.2018
 (PCR checked and approved by the SVR)

Issue date

05/11/2021

Valid to

04/02/2026



Dipl. Ing. Hans Peters
 (chairman of Institut Bauen und Umwelt e.V.)



Dr. Alexander Röder
 (Managing Director Institut Bauen und Umwelt e.V.)

Scope:

The declaration refers to PIPELANE pipe sections made of glass wool, which are manufactured at the Sager AG site in Dürrenäsch/CH.

The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

The EPD was created according to the specifications of *EN 15804+A1*. In the following, the standard will be simplified as *EN 15804*.

Verification

The standard *EN 15804* serves as the core PCR

Independent verification of the declaration and data according to *ISO 14025:2010*

☐ internally ☒ externally



Dr. Eva Schmincke
 (Independent verifier)

Product

Product description/Product definition

The product declaration refers to pipe sections made of glass wool. Glass wool consists of man-made monofilament mineral fibres of non-crystalline structure. The average fibre diameter is between 3 and 6 µm. The production is monitored and certified by RAL and EUCB. The glass wool complies with the definition of glass wool according to German legislation on hazardous substances. The density of PIPELANE products varies from 45 to 100 kg/m³.

The products are marketed under the name PIPELANE.

Regulation (EU) No 305/2011 (CPR) applies to the placing on the market of the product in the EU/EFTA (except Switzerland). The product requires a declaration of performance taking into account *DIN EN 13162:2012+A1:2015, Thermal insulation products for buildings - Factory made mineral wool (MW) products*

specification and the CE marking. The respective national regulations apply to the use.

Application

PIPELANE pipe sections are used as sheathing for pipelines as thermal and sound insulation and to minimise heat radiation losses. They are mainly used for the insulation of building services and operational industrial plants.

If the pipes require particularly impact-resistant surfaces or a vapour control layer, the PIPELANE pipe shells can be coated.

Technical Data

Name	Value	Unit
Thermal conductivity	0.032	W/(mK)
Water vapour diffusion resistance factor	1	-
Water vapor diffusion equivalent air layer thickness	$\mu \times d$	m
Sound absorption coefficient	-	%
Gross density	45 - 100	kg/m ³
Compressive strength	0 - 20	N/mm ²
Formaldehyde emissions according to EN 717-1	3 - 6	$\mu\text{g}/\text{m}^3$
Resistance to temperature	250	°C
Fire code	A1	

The values are valid for uncoated products

LCA: Calculation rules

Declared Unit

The declared values refer to 1 kg of uncoated, phenolic resin-bonded PIPELANE pipe sections made of glass wool.

Declared unit

Name	Value	Unit
Gross density	55	kg/m ³
conversion factor [Mass/Declared Unit]	-	-
Declared unit	1	kg
conversion factor [Mass/Declared Unit]	1	-

The data per kg can easily be extrapolated to the quantity used of a specific product.

The appendix contains values per m² for the following coatings, which can be added to the life cycle assessment values of the uncoated product:

- Glass fleece natural (0.035 kg/m²)
- Glass fleece natural (longitudinally reinforced) (0.055 kg/m²)
- Glass fleece natural (0.100 kg/m²)
- Glass fleece black (0.060 kg/m²)
- Glass fabric (0.128 kg/m²)
- Pure aluminium, grid-reinforced (0.079 kg/m²)
- Kraft paper (0.105 kg/m²)
- Alu/PET/Alu/PE (0.125 kg/m²)

System boundary

Type of EPD: Cradle to factory gate - with options

Performance values of the product according to the declaration of performance in relation to its essential characteristics according to *DIN EN 13162:2012+A1:2015, Thermal insulation products for buildings - Factory made mineral wool (MW) products - Specification*.

Base materials/Ancillary materials

The essential raw materials for glass wool production are cullet (> 75 mass %), sand, soda (approx. 5 %), borax (approx. 8 %) and phonolite. Cross-linking of the fibres is achieved by using up to 8 % binder based on a urea-modified phenol-formaldehyde resin in the finished product.

1) The product/product/at least part of the product contains substances on the *ECHA* candidate list (date 16.07.2019) above 0.1 % by mass: no

Reference service life

A reference service life according to *ISO 15686* cannot be declared due to the different areas of application of PIPELANE pipe sections.

The useful life of PIPELANE pipe sections is in the order of magnitude of the useful life of the respective component or building.

Modules A1-A3 cover all material and energy flows required for the production of PIPELANE glass wool; the system boundary for waste glass is assumed to be at the point where it is sorted by type. Certified hydropower of European origin is inventoried for electricity consumption at the production site.

Module A4 includes transport to the construction site.

Module A5 involves the incineration of the transport packaging in a waste incineration plant (MWIP), with the recovered energy being exported to Module D. In addition, 2% waste is assumed in accordance with *EN 16783*, which means that a corresponding production quantity including packaging and transport to the construction site and its disposal (waste and its packaging) are also inventoried in module A5.

Module C1: dust emissions are inventoried during deconstruction, which however are not taken into account in the categories of the impact assessment.

Module C2 comprises the transport of the deconstructed glass wool to a landfill for inert materials.

In **Module C3**, due to the assumed disposal scenario in an inert landfill, no environmental impacts occur in this module.

Module C4 covers the landfilling process of glass wool without taking into account the energetic utilisation of the landfill gas from the (small) organic components.

Module D includes the benefits from the production of electricity and heat generated from the thermal

treatment of the packaging waste from the installation of the glass wool on the construction site (incl. 2 % of the packaging offcuts) from Module A5 in a MWIP.

Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared

were created according to *EN 15804* and the building context, respectively the product-specific characteristics of performance, are taken into account.

An updated version of ecoinvent 2.2 (*KBOB 2016*) has been used as the background database

LCA: Scenarios and additional technical information

Transport to the construction site (A4)

The transports from the factory to the construction site are calculated as a lump sum with a Swiss fleet average for trucks and a default distance of 100 km - this is in a realistic order of magnitude for Switzerland and can be easily scaled to the real transport distance between the factory and the construction site for project-specific calculations.

Transport was scaled to take into account the effective utilisation of the truck: the utilisation assumed in the data set is 9512 kg/load; the loading of PIPELANE glass wool for delivery in Switzerland varies between 3960 kg/load and 7040 kg/load, using the mean value of 5450 kg/load.

Installation in the building (A5)

Disposal of the packaging materials in a MWIP and incl. transport, production, transport to the construction site, installation and disposal of 2 % offcuts incl. their packaging. It is assumed that the PE films and the disposable pallets are used in a MWIP for energy recovery. This assumes an efficiency of 28.51 % gross useful heat and 15.84 % electricity and a current average internal consumption of the MWIP of 0.1273 kWh electricity and 0.4853 MJ useful heat per kilogram of waste (status Switzerland, 2011; *Doka 2015*). A transport distance of 10 km by truck is inventoried for the waste incineration plant.

It is assumed that the insulation materials can be installed on-site without further effort.

Name	Value	Unit
Collected as mixed construction waste	1	kg
Landfilling	1	kg

Reuse, recovery and recycling potential (D)

The combustible waste from module A5 is recovered as energy in a waste incineration plant. The CH electricity mix (consumption mix) or heat from natural gas firing, condensing, modulating < 100kW is credited for the exported energy.

End-of-life (C1–C4)

Module C1

The insulation material is deconstructed without relevant energy input, but causing particle emissions.

Module C2

The deconstructed building is transported by lorry as a Swiss fleet average to an inert material landfill as mixed construction demolition, assumed transport distance according to KBOB calculations: 15 km.

Module C3

A scenario is assumed in which 100 % of the glass wool is disposed of in an inert waste landfill. Therefore, no environmental impacts are shown in Module C3.

Module C4

100 % of the deconstructed glass wool is disposed of as mixed demolition waste in an inert landfill, without taking into account the energetic use of the landfill gas from the (small) organic components.

LCA: Results

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE NOT DECLARED; MNR = MODULE NOT RELEVANT)

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MNR	MNR	MNR	MND	MND	MND	X	X	X	X

RESULTS OF THE LCA - ENVIRONMENTAL IMPACT according to EN 15804+A1: 1 kg PIPELANE pipe sections

Parameter	Unit	A1-A3	A4	A5	C2	C3	C4	D
GWP	[kg CO ₂ -Eq.]	1.88E+0	3.68E-2	2.02E-1	2.04E-3	0.00E+0	7.12E-3	-3.11E-2
ODP	[kg CFC11-Eq.]	1.84E-7	1.58E-9	6.58E-9	8.78E-11	0.00E+0	6.45E-10	-5.44E-9
AP	[kg SO ₂ -Eq.]	6.09E-3	1.91E-4	1.72E-4	1.06E-5	0.00E+0	4.14E-5	-3.24E-5
EP	[kg (PO ₄) ³ -Eq.]	1.31E-3	4.19E-5	3.90E-5	2.33E-6	0.00E+0	8.72E-6	-4.69E-6
POCP	[kg ethene-Eq.]	7.31E-4	6.83E-6	1.65E-5	3.79E-7	0.00E+0	1.52E-6	-2.73E-6
ADPE	[kg Sb-Eq.]	3.10E-6	8.68E-8	7.23E-8	4.82E-9	0.00E+0	6.80E-9	-1.04E-8
ADPF	[MJ]	2.88E+1	5.57E-1	6.97E-1	3.09E-2	0.00E+0	1.77E-1	-4.49E-1

Caption GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources

RESULTS OF THE LCA - INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A1: 1 kg PIPELANE pipe sections

Parameter	Unit	A1-A3	A4	A5	C2	C3	C4	D
PERE	[MJ]	1.71E+1	8.64E-3	2.03E-1	4.80E-4	0.00E+0	1.72E-3	-9.11E-2
PERM	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PERT	[MJ]	1.71E+1	8.64E-3	2.03E-1	4.80E-4	0.00E+0	1.72E-3	-9.11E-2
PENRE	[MJ]	3.07E+1	5.88E-1	1.21E+0	3.26E-2	0.00E+0	1.84E-1	-8.54E-1
PENRM	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PENRT	[MJ]	3.07E+1	5.88E-1	1.21E+0	3.26E-2	0.00E+0	1.84E-1	-8.54E-1
SM	[kg]	7.50E-1	0.00E+0	1.50E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0
RSF	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
NRSF	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
FW	[m³]	3.32E-2	2.74E-4	1.17E-3	1.52E-5	0.00E+0	1.99E-4	-3.95E-4

Caption PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

RESULTS OF THE LCA – WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A1: 1 kg PIPELANE pipe sections

Parameter	Unit	A1-A3	A4	A5	C2	C3	C4	D
HWD	[kg]	3.33E-5	6.66E-7	9.31E-7	3.70E-8	0.00E+0	6.26E-8	-2.94E-7
NHWD	[kg]	2.83E-1	5.19E-3	2.85E-2	2.88E-4	0.00E+0	9.99E-1	-9.06E-4
RWD	[kg]	3.92E-5	6.56E-7	1.08E-5	3.64E-8	0.00E+0	1.32E-7	-8.50E-6
CRU	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MFR	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MER	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EEE	[MJ]	0.00E+0	0.00E+0	1.96E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EET	[MJ]	0.00E+0	0.00E+0	3.87E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0

Caption HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy

References

Standards

EN 15804

DIN EN 15804:2012+A2:2019, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products; German version EN 15804:2012+A2:2019.

EN 13162:2012+A1:2015

DIN EN 13162:2015-04, Thermal insulation products for buildings - Factory made mineral wool (MW) products - Specification; German version EN 13162:2012+A1:2015.

EN 16783

DIN EN 16783:2018-03, Thermal insulation products - Product category rules (PCR) for factory made and in-situ formed products for preparing environmental product declarations; German version EN 16783:2017.

ISO 14025

DIN EN ISO 14025:2011-10, Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 15686

Buildings and constructed assets - Service life planning; several parts.

Further literature

IBU 2019

Institut Bauen und Umwelt e.V.: General programme instructions of the Institut Bauen und Umwelt e.V. (IBU). Version 1.1, Berlin: Institut Bauen und Umwelt e.V., 2019. www.ibu-epd.com

IBU 2019

Institut Bauen und Umwelt e.V.: PCR Teil A: Calculation rules for the life cycle assessment and

requirements on the project report. Version 1.8, Berlin: Institut Bauen & Umwelt, Berlin, 2019. www.ibu-epd.com

IBU 2018

Institut Bauen und Umwelt e.V.: PCR Teil B: Requirements on the EPD for mineral insulation. Version 2018/12, Berlin: Institut Bauen & Umwelt, Berlin, 2018. www.ibu-epd.com

Doka 2015

Doka (2015): Aktualisierung der LCI Daten zu Kehrlichtverbrennung (Teilprojekt 8). In: Werner F., Bauer C., Büsser S., Doka G., Kaufmann E., Kono J., Luginbühl, U., Mina M., Frischknecht R., Thees O., Wallbaum H., Zimmermann W., Hirschier R. (2015): Aktualisierung der Modelle und Datensätze zu Holz und Holzprodukten in der Datenbank ecoinvent. Auftraggeberin: Bundesamt für Umwelt, Aktionsplan Holz, Bern, Auftragnehmer: Eidgenössische Materialprüfungs- und Forschungsanstalt EMPA. Schlussbericht 18. Februar 2015. S. 86-92.

ECHA

The Candidate List of substances of very high concern, available via <https://echa.europa.eu/nl/-/four-news-substances-added-to-the-candidate-list>.

KBOB 2016

KBOB, eco-bau und IPB (2016) ecoinvent Datenbestand 2016 basierend auf Datenbestand ecoinvent 2.2; Grundlage für die KBOB Empfehlung 2009/1:2016: Ökobilanzdaten im Baubereich. Stand April 2016. Koordinationskonferenz der Bau- und Liegenschaftsorgane der öffentlichen Bauherren c/o BBL Bundesamt für Bauten und Logistik.

**Publisher**

Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Tel +49 (0)30 3087748- 0
Fax +49 (0)30 3087748- 29
Mail info@ibu-epd.com
Web www.ibu-epd.com

**Programme holder**

Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Tel +49 (0)30 - 3087748- 0
Fax +49 (0)30 - 3087748 - 29
Mail info@ibu-epd.com
Web www.ibu-epd.com

Dr. Frank Werner

Umwelt & Entwicklung

**Author of the Life Cycle
Assessment**

Dr. Frank Werner - Umwelt &
Entwicklung
Idaplatz 3
8003 Zürich
Switzerland

Tel + 41 (0)44 241 39 06
Fax + 41 (0)44 461 33 28
Mail frank@frankwerner.ch
Web <http://www.frankwerner.ch/>

simply better insulation

**Owner of the Declaration**

Sager AG
Dornhügelstrasse 10
5724 Dürrenäsch
Switzerland

Tel +41 62 767 87 87
Fax +41 62 767 87 80
Mail info@sager.ch
Web www.sager.ch