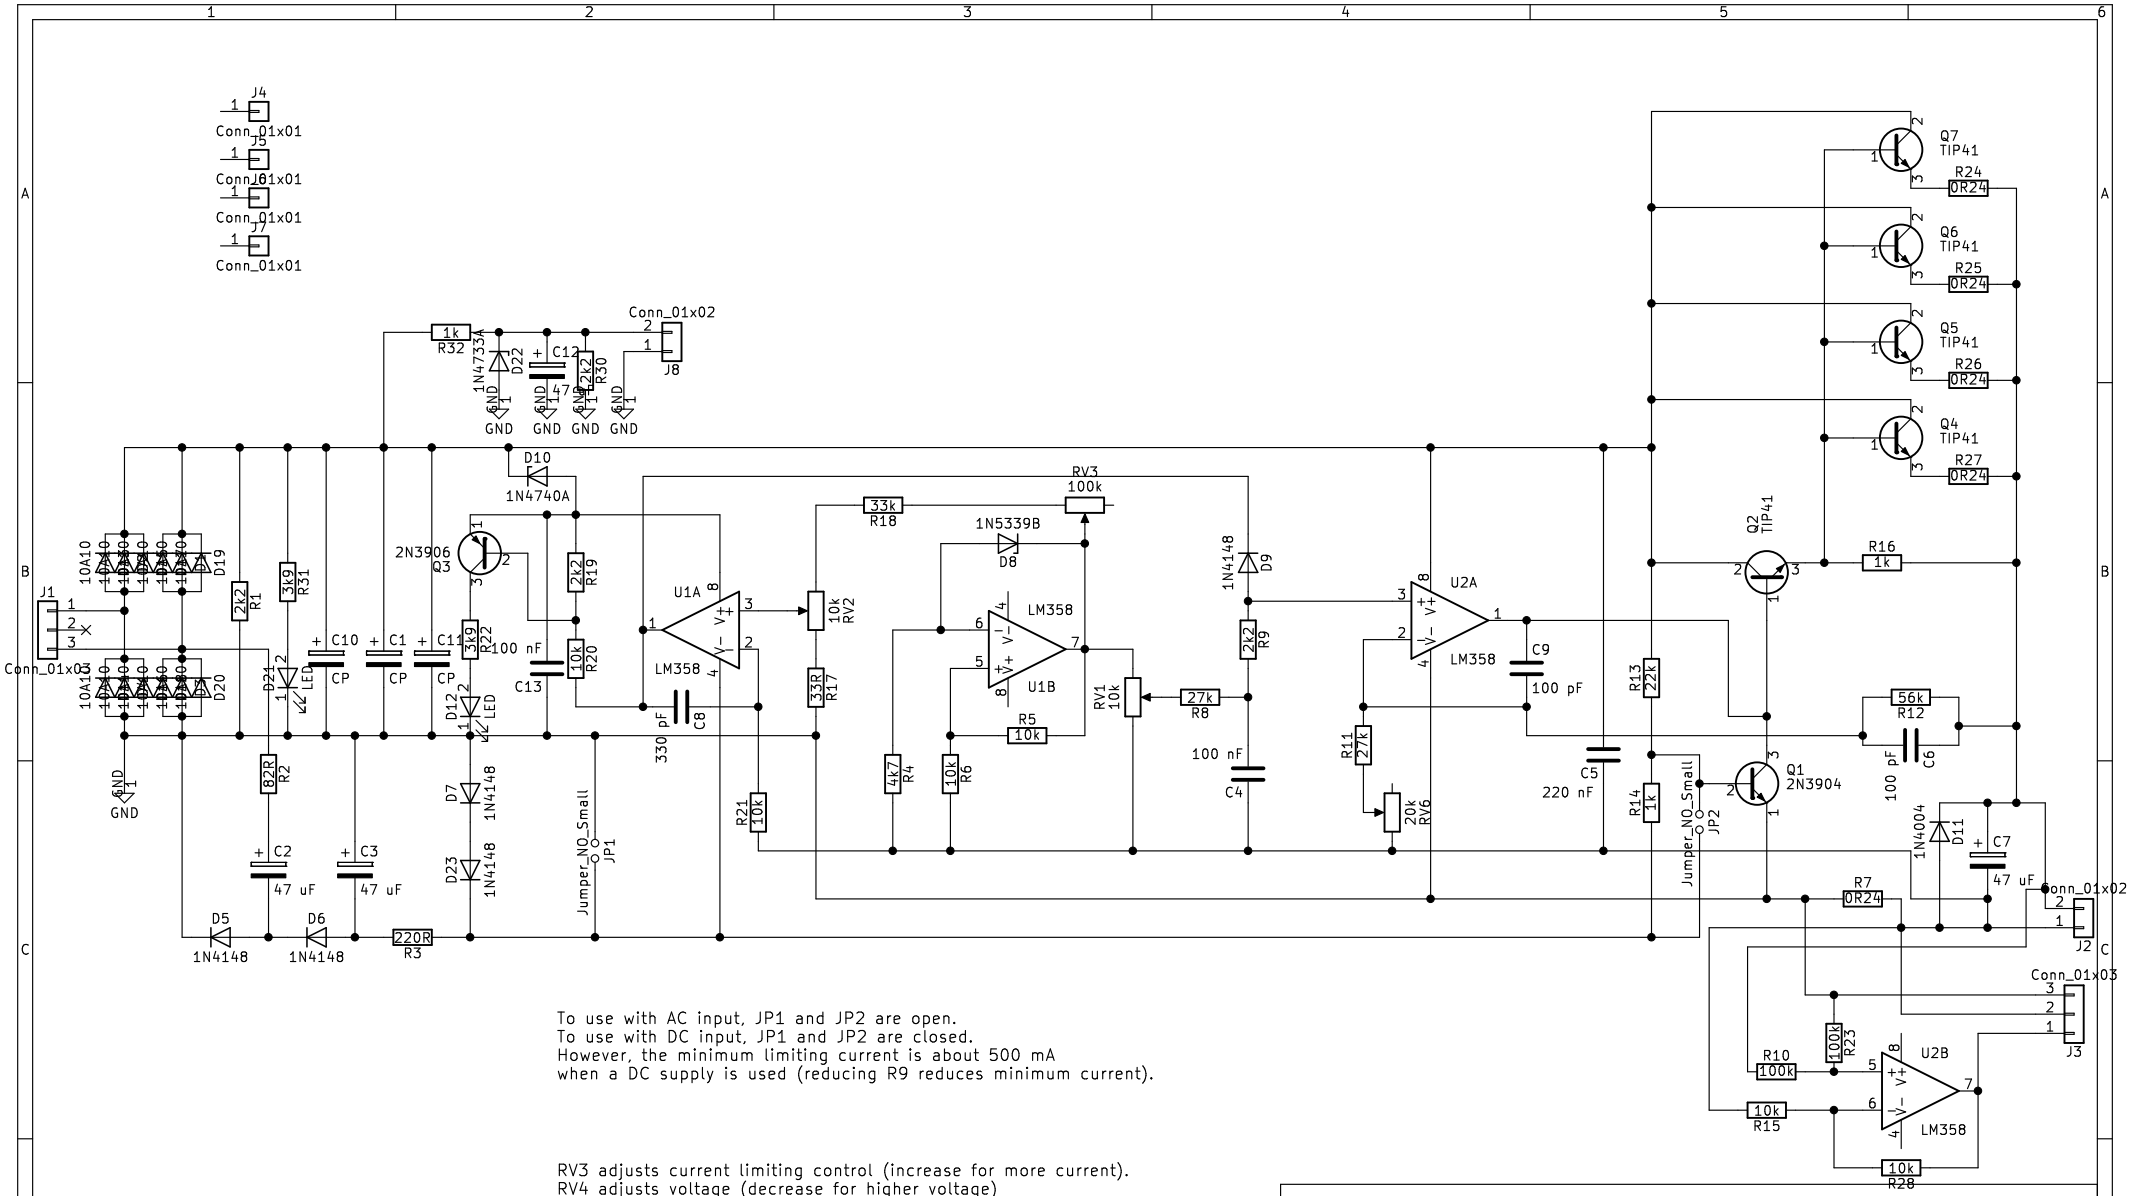

To use with AC input, JP1 and JP2 are open.
To use with DC input, JP1 and JP2 are closed.
However, the minimum limiting current is about 500 mA
when a DC supply is used (reducing R9 reduces minimum current).

RV3 adjusts current limiting control (increase for more current).
RV4 adjusts voltage (decrease for higher voltage)

Sheet: /
File: LinearPS.sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. kicad 4.0.7		Id: 1/1