



AprilTag sheet - cylinder reorientation rig

PRINT AT 100% / "Actual size". Turn OFF "Fit to page" and "Shrink oversized pages" - they scale silently.
Every tag is labelled with the number to pass as tag_size - the distance between the corners the detector returns.
Verify against the bar below with calipers, then measure a printed tag and pass THAT number, not the nominal.
Use a LASER printer. Inkjet black dye is often transparent at 850 nm - invisible to the D435 infrared imagers.




100.0 mm exactly. Short = your printer scaled it.


A - CYLINDER, 30.0 mm recommended: the size you asked for

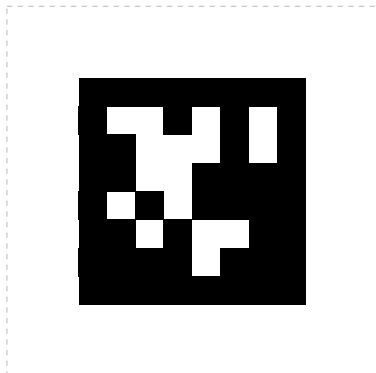

tag36h11 id 0 tag_size 30.0 mm

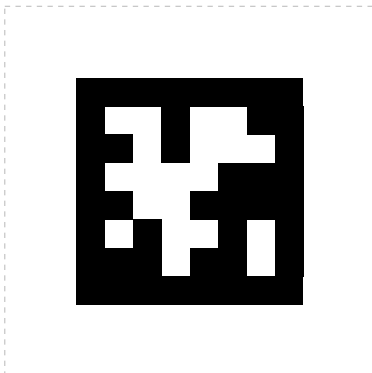


tag36h11 id 1 tag_size 30.0 mm

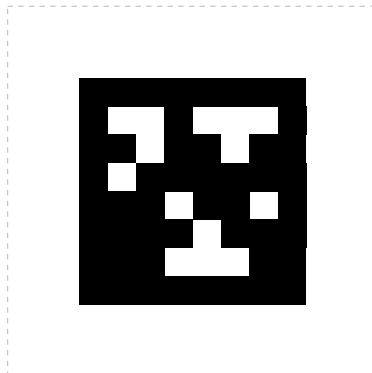


tag36h11 id 2 tag_size 30.0 mm


B - CYLINDER, 20.0 mm fallback if the mount plate ends up tight



tag36h11 id 3 tag_size 20.0 mm




tag36h11 id 4 tag_size 20.0 mm




tag36h11 id 5 tag_size 20.0 mm


C - STATIC REFERENCE 40.0 mm + tagStandard41h12 left: fix to the fixture, it never moves. right: needs pupil-apriltags

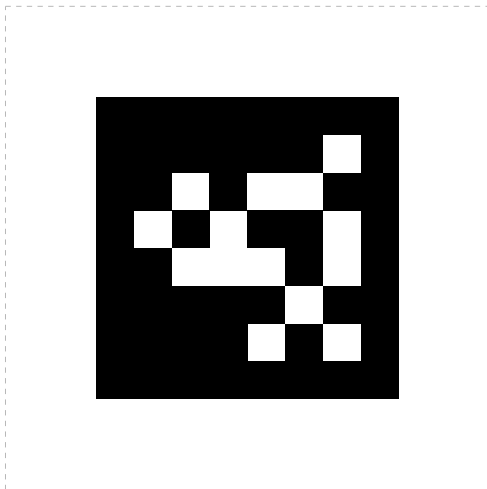

tag36h11 id 6 tag_size 40.0 mm

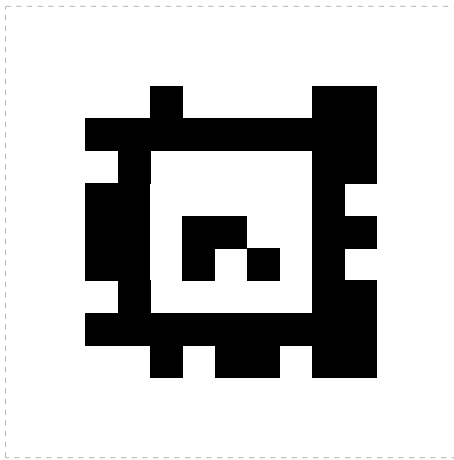

tagStandard41h12 id 0 tag_size 21.4 mm

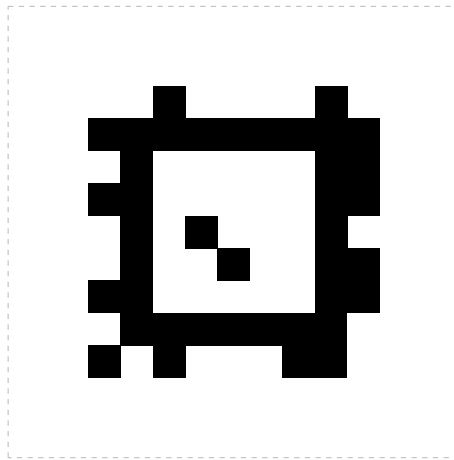

tagStandard41h12 id 1 tag_size 21.4 mm

tag36h11: tag_size IS the black square you can see and measure (8 cells). tagStandard41h12: it is NOT. That family has no quiet zone - its outer ring carries data - so there is no clean outer quad and the detector returns the INNER edge of the black ring, 5 cells across, not the 7-cell square. Measuring its black square and passing that inflates every distance by 40%. Both families above were decode-verified at the labelled tag_size.